


QD Bushing



Features: All Bushings up to sizes M, and those with a shallow keyseat, are manufactured in DUCTILE iron, a stronger material offering numerous advantages. All sizes have a set screw over the keyway to secure the key, which is advantageous in vertical applications. 100% interchangeable with licensed manufacturer's products. Available in inches & metric sizes. Available "Short" for weld-on hubs. Full, not partial split.

How to order: Example: SFX1-1/16; SF=Bushing Size. X 1-1/16=Bore Size (1-1/16") Inch bore sizes are designated with the whole inch followed by the fraction. For example, a 1.5" diameter bore would be 1-1/2. Metric bore sizes are designated with "MM" after the metric dimension (X 25MM).

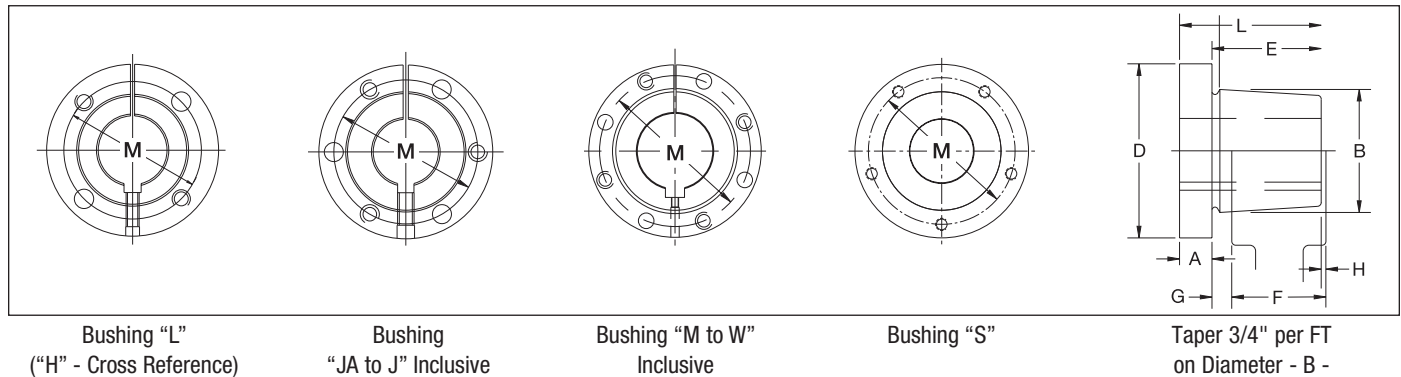

Dimensions

Bushing Size	List Price	Mult. Sym.	Dimensions - Inches									Cap Screws Required NC Grade 5	Set Screw Dimensions	Bore Range		Approx. Wt. (lbs)
			A	B	D	E	F	G	H	L	Bolt Circle M			Min.	Max.	
L	9.00	QDB20	11/32	1-5/8	2-1/2	1	29/32	3/16	3/32	1 11/32	2	2=1/4X7/8	10-24 UNC x 1/4"	3/8	1-1/2	0.7
JA	10.90	QDB01	5/16	1-3/8	2	11/16	5/8	13/64	9/64	1	1-21/32	3=10-24X1	10-24 UNC x 1/4"	1/2	1-1/4	0.4
SH	14.90	QDB01	3/8	1-7/8	2-11/16	7/8	3/4	1/4	1/8	1-1/4	2-1/4	3=1/4X1-3/8	1/4-20 UNC x 1/4"	1/2	1-11/16	0.9
SDS	17.30	QDB01	7/16	2-3/16	3-3/16	7/8	3/4	1/4	1/8	1-5/16	2-11/16	3=1/4X1-3/8	1/4-20 UNC x 1/4"	1/2	2	1.3
SD	20.80	QDB01	7/16	2-3/16	3-3/16	1-3/8	1-1/4	1/4	1/8	1-13/16	2-11/16	3=1/4X1-7/8	1/4-20 UNC x 1/4"	1/2	2	1.6
SK	26.80	QDB01	1/2	2-13/16	3-7/8	1-3/8	1-1/4	5/16	3/16	1-7/8	3-5/16	3=5/16X2	1/4-20 UNC x 1/4"	1/2	2-5/8	2.7
SF	33.00	QDB01	1/2	3-1/8	4-5/8	1-1/2	1-1/4	5/16	1/16	2	3-7/8	3=3/8X2	5/16-18 UNC x 3/8"	1/2	2-15/16	3.9
E	69.20	QDB01	3/4	3-27/32	6	1-7/8	1-5/8	5/16	1/16	2-5/8	5	3=1/2X2-3/4	3/8-16 UNC x 3/8"	7/8	3-1/2	8.5
F	128.00	QDB01	13/16	4-7/16	6-5/8	2-13/16	2-1/2	13/32	3/32	3-5/8	5-5/8	3=9/16X3-5/8	3/8-16 UNC x 3/8"	1	4	13.3
J	160.00	QDB01	1	5-5/32	7-1/4	3-1/2	3-3/16	13/32	3/32	4-1/2	6-1/4	3=5/8X4 1/2	3/8-16 UNC x 3/8"	1-7/16	4-1/2	20.8
M	320.00	QDB01	1-1/4	6-1/2	9-1/8	5-1/2	5-3/16	13/32	3/32	6-3/4	7-7/8	4=3/4X7	3/8-16 UNC x 1/2"	2	5-1/2	48.5
N	560.00	QDB03	1-1/2	7	10	6-5/8	6-1/4	9/16	3/16	8-1/8	8-1/2	4=7/8X8	1/2-13 UNC x 5/8"	2-3/4	6	62.1
P	840.00	QDB03	1-3/4	8-1/4	11-3/4	7-5/8	7-1/4	5/8	1/4	9-3/8	10	4=1X9-1/2	5/8-11 UNC x 1-1/4"	2-15/16	7	108.8
W	1480.00	QDB03	2	10-7/16	15	9-3/8	9	5/8	1/4	11-3/8	12-3/4	4=1-1/8X11-1/2	1-8 UNC x 1-1/2"	4-1/4	8-1/2	218.9
S	3480.00	QDB03	3-1/4	12-1/8	17-3/4	12-1/2	12	13/16	5/16	15-3/4	15	5=1-1/4X15-1/2	1-1/4-7 UNC x 2"	5-1/2	10	382.0
SX5**	3132.00	QDB03	3-1/4	12-1/8	17-3/4	12-1/2	12	13/16	5/16	15-3/4	15	5=1-1/4X15-1/2	1-1/4-7 UNC x 2"	-	-	382.0
SX7-1/2**	3132.00	QDB03	3-1/4	12-1/8	17-3/4	12-1/2	12	13/16	5/16	15-3/4	15	5=1-1/4X15-1/2	1-1/4-7 UNC x 2"	-	-	382.0
Z	On request	QDB03	2-5/8	16	22	9 3/8	9	3/4	3/8	12	19	5=1-1/4X12	1-8 UNC X 1-1/2"	7	12	435.0

** RB = Rough bore

Note: Standard millimeter bores also available.

Note: Approx. weight in lbs. for an average size bore.

For more details and additional products, see complete Baldor•Maska® Product Catalog or www.baldor.com

Note: Tapered Bushings are available from stock in all bores and keyseats listed. In some cases, as the bore increases in diameter, a shallow keyseat is provided - due to insufficient metal thickness. When this happens, Baldor furnishes the correct rectangular key (inches or imperial bore only). This does not affect the bushing's ability to transmit the load. The rectangular key, or flat key as some call it, fits into the standard keyway in the shaft. Keys not supplied for standard keyseat dimension.

QD BUSHINGS STANDARD STOCK BORES (INCHES)

Part Number	Keyseat	Key	Wt	Part Number	Keyseat	Key	Wt	Part Number	Keyseat	Key	Wt
LX3/8	NO. K.S.	---	1.1	SDSX1	1/4 X 1/8	1/4 X 1/4	1.5	SKX1-13/16	1/2 X 1/4	1/2 X 1/2	2.5
LX7/16	NO. K.S.	---	1.1	SDSX1-1/16	1/4 X 1/8	1/4 X 1/4	1.5	SKX1-7/8	1/2 X 1/4	1/2 X 1/2	2.4
LX1/2	NO. K.S.	---	1.0	SDSX1-1/8	1/4 X 1/8	1/4 X 1/4	1.5	SKX1-15/16	1/2 X 1/4	1/2 X 1/2	2.3
LX1/2KW	1/8 X 1/16	1/8 X 1/8	0.9	SDSX1-3/16	1/4 X 1/8	1/4 X 1/4	1.5	SKX2	1/2 X 1/4	1/2 X 1/2	2.2
LX9/16	1/8 X 1/16	1/8 X 1/8	1.0	SDSX1-1/4	1/4 X 1/8	1/4 X 1/4	1.4	SKX2-1/16	1/2 X 1/4	1/2 X 1/2	2.1
LX5/8	3/16 X 3/32	3/16 X 3/16	0.9	SDSX1-5/16	5/16 X 5/32	5/16 X 5/16	1.3	SKX2-1/8	1/2 X 1/4	1/2 X 1/2	2.0
LX11/16	3/16 X 3/32	3/16 X 3/16	0.9	SDSX1-3/8	5/16 X 5/32	5/16 X 5/16	1.3	SKX2-3/16	1/2 X 1/8**	1/2 X 3/8	2.1
LX3/4	3/16 X 3/32	3/16 X 3/16	1.0	SDSX1-7/16	3/8 X 3/16	3/8 X 3/8	1.2	SKX2-1/4	1/2 X 1/8**	1/2 X 3/8	1.9
LX13/16	3/16 X 3/32	3/16 X 3/16	0.9	SDSX1-1/2	3/8 X 3/16	3/8 X 3/8	1.2	SKX2-1/4KW5/8	5/8 X 1/8**	5/8 X 7/16	1.9
LX7/8	3/16 X 3/32	3/16 X 3/16	0.9	SDSX1-9/16	3/8 X 3/16	3/8 X 3/8	1.1	SKX2-5/16	5/8 X 1/8**	5/8 X 7/16	1.9
LX15/16	1/4 X 1/8	1/4 X 1/4	0.8	SDSX1-5/8	3/8 X 3/16	3/8 X 3/8	1.1	SKX2-3/8	5/8 X 1/8**	5/8 X 7/16	1.8
LX1	1/4 X 1/8	1/4 X 1/4	0.8	SDSX1-11/16	3/8 X 1/8**	3/8 X 5/16	1.1	SKX2-7/16	5/8 X 1/16**	5/8 X 3/8	1.7
LX1-1/16	1/4 X 1/8	1/4 X 1/4	0.7	SDSX1-3/4	3/8 X 1/8**	3/8 X 5/16	1.1	SKX2-1/2	5/8 X 1/16**	5/8 X 3/8	1.6
LX1-1/8	1/4 X 1/8	1/4 X 1/4	0.7	SDSX1-13/16	1/2 X 1/8**	1/2 X 3/8	1.0	SKX2-9/16	NO K.S.	---	1.3
LX1-3/16	1/4 X 1/8	1/4 X 1/4	0.7	SDSX1-7/8	1/2 X 1/16**	1/2 X 5/16	1.0	SKX2-5/8	NO K.S.	---	1.2
LX1-1/4	1/4 X 1/8	1/4 X 1/4	0.7	SDSX1-15/16	1/2 X 1/16**	1/2 X 5/16	0.9	SFX1/2	NO. K.S.	---	5.1
LX1-5/16	5/16 X 1/16**	5/16 X 7/32	0.6	SDSX2	NO K.S.	---	0.8	SFX9/16	1/8 X 1/16	1/8 X 1/8	5.0
LX1-3/8	5/16 X 1/16**	5/16 X 7/32	0.6	SDX1/2	NO. K.S.	---	2.2	SFX5/8	3/16 X 3/32	3/16 X 3/16	5.0
LX1-7/16	3/8 X 1/16**	3/8 X 1/4	0.6	SDX9/16	1/8 X 1/16	1/8 X 1/8	2.1	SFX11/16	3/16 X 3/32	3/16 X 3/16	5.0
LX1-1/2	3/8 X 3/64**	3/8 X 15/64	0.5	SDX5/8	3/16 X 3/32	3/16 X 3/16	2.1	SFX3/4	3/16 X 3/32	3/16 X 3/16	5.0
JAX1/2	NO. K.S.	---	0.5	SDX11/16	3/16 X 3/32	3/16 X 3/16	2.1	SFX13/16	3/16 X 3/32	3/16 X 3/16	4.9
JAX1/2KW	1/8 X 1/16	1/8 X 1/8	0.5	SDX3/4	3/16 X 3/32	3/16 X 3/16	2.1	SFX7/8	3/16 X 3/32	3/16 X 3/16	4.8
JAX9/16	1/8 X 1/16	1/8 X 1/8	0.5	SDX13/16	3/16 X 3/32	3/16 X 3/16	2.1	SFX15/16	1/4 X 1/8	1/4 X 1/4	4.8
JAX5/8	3/16 X 3/32	3/16 X 3/16	0.5	SDX7/8	3/16 X 3/32	3/16 X 3/16	2.0	SFX1	1/4 X 1/8	1/4 X 1/4	4.8
JAX11/16	3/16 X 3/32	3/16 X 3/16	0.5	SDX15/16	1/4 X 1/8	1/4 X 1/4	1.9	SFX1-1/16	1/4 X 1/8	1/4 X 1/4	4.7
JAX3/4	3/16 X 3/32	3/16 X 3/16	0.5	SDX1	1/4 X 1/8	1/4 X 1/4	1.9	SFX1-1/8	1/4 X 1/8	1/4 X 1/4	4.7
JAX13/16	3/16 X 3/32	3/16 X 3/16	0.4	SDX1-1/16	1/4 X 1/8	1/4 X 1/4	1.9	SFX1-3/16	1/4 X 1/8	1/4 X 1/4	4.6
JAX7/8	3/16 X 3/32	3/16 X 3/16	0.4	SDX1-1/8	1/4 X 1/8	1/4 X 1/4	1.8	SFX1-1/4	1/4 X 1/8	1/4 X 1/4	4.7
JAX15/16	1/4 X 1/8	1/4 X 1/4	0.4	SDX1-3/16	1/4 X 1/8	1/4 X 1/4	1.7	SFX1-5/16	5/16 X 5/32	5/16 X 5/16	4.5
JAX1	1/4 X 1/8	1/4 X 1/4	0.4	SDX1-1/4	1/4 X 1/8	1/4 X 1/4	1.7	SFX1-3/8	5/16 X 5/32	5/16 X 5/16	4.4
JAX1-1/16	1/4 X 1/16**	1/4 X 3/16	0.4	SDX1-5/16	5/16 X 5/32	5/16 X 5/16	1.6	SFX1-7/16	3/8 X 3/16	3/8 X 3/8	4.4
JAX1-1/8	1/4 X 1/16**	1/4 X 3/16	0.4	SDX1-3/8	5/16 X 5/32	5/16 X 5/16	1.6	SFX1-1/2	3/8 X 3/16	3/8 X 3/8	4.3
JAX1-3/16	1/4 X 1/16**	1/4 X 3/16	0.3	SDX1-7/16	3/8 X 3/16	3/8 X 3/8	1.6	SFX1-9/16	3/8 X 3/16	3/8 X 3/8	4.1
JAX1-1/4	1/4 X 1/32**	1/4 X 5/32	0.3	SDX1-1/2	3/8 X 3/16	3/8 X 3/8	1.5	SFX1-5/8	3/8 X 3/16	3/8 X 3/8	4.2
SHX1/2KW	1/8 X 1/16	1/8 X 1/8	1.2	SDX1-9/16	3/8 X 3/16	3/8 X 3/8	1.4	SFX1-11/16	3/8 X 3/16	3/8 X 3/8	4.0
SHX1/2	NO. K.S.	---	1.2	SDX1-5/8	3/8 X 3/16	3/8 X 3/8	1.3	SFX1-3/4	3/8 X 3/16	3/8 X 3/8	4.0
SHX9/16	1/8 X 1/16	1/8 X 1/8	1.1	SDX1-11/16	3/8 X 1/8**	3/8 X 5/16	1.3	SFX1-13/16	1/2 X 1/4	1/2 X 1/2	3.9
SHX5/8	3/16 X 3/32	3/16 X 3/16	1.2	SDX1-3/4	3/8 X 1/8**	3/8 X 5/16	1.2	SFX1-7/8	1/2 X 1/4	1/2 X 1/2	3.8
SHX11/16	3/16 X 3/32	3/16 X 3/16	1.1	SDX1-13/16	1/2 X 1/8**	1/2 X 3/8	1.2	SFX1-15/16	1/2 X 1/4	1/2 X 1/2	3.7
SHX3/4	3/16 X 3/32	3/16 X 3/16	1.1	SDX1-7/8	1/2 X 1/16**	1/2 X 5/16	1.1	SFX2	1/2 X 1/4	1/2 X 1/2	3.6
SHX13/16	3/16 X 3/32	3/16 X 3/16	1.1	SDX1-15/16	1/2 X 1/16**	1/2 X 5/16	1.0	SFX2-1/16	1/2 X 1/4	1/2 X 1/2	3.4
SHX7/8	3/16 X 3/32	3/16 X 3/16	1.1	SDX2	NO K.S.	---	0.8	SFX2-1/8	1/2 X 1/4	1/2 X 1/2	3.4
SHX15/16	1/4 X 1/8	1/4 X 1/4	1.0	SKX1/2	NO. K.S.	---	3.7	SFX2-3/16	1/2 X 1/4	1/2 X 1/2	3.3
SHX1	1/4 X 1/8	1/4 X 1/4	1.0	SKX9/16	1/8 X 1/16	1/8 X 1/8	3.6	SFX2-1/4	1/2 X 1/4	1/2 X 1/2	3.2
SHX1-1/16	1/4 X 1/8	1/4 X 1/4	0.9	SKX5/8	3/16 X 3/32	3/16 X 3/16	3.6	SFX2-1/4KW5/8	5/8 X 5/16	5/8 X 5/8	4.0
SHX1-1/8	1/4 X 1/8	1/4 X 1/4	0.9	SKX11/16	3/16 X 3/32	3/16 X 3/16	3.6	SFX2-5/16	5/8 X 3/16**	5/8 X 1/2	3.3
SHX1-3/16	1/4 X 1/8	1/4 X 1/4	0.9	SKX3/4	3/16 X 3/32	3/16 X 3/16	3.6	SFX2-3/8	5/8 X 3/16**	5/8 X 1/2	3.1
SHX1-1/4	1/4 X 1/8	1/4 X 1/4	0.8	SKX13/16	3/16 X 3/32	3/16 X 3/16	3.5	SFX2-7/16	5/8 X 3/16**	5/8 X 1/2	3.0
SHX1-5/16	5/16 X 5/32	5/16 X 5/16	0.8	SKX7/8	3/16 X 3/32	3/16 X 3/16	3.5	SFX2-1/2	5/8 X 3/16**	5/8 X 1/2	2.9
SHX1-3/8	5/16 X 5/32	5/16 X 5/16	0.7	SKX15/16	1/4 X 1/8	1/4 X 1/4	3.5	SFX2-9/16	5/8 X 1/16**	5/8 X 3/8	2.7
SHX1-7/16	3/8 X 1/8**	3/8 X 5/16	0.8	SKX1	1/4 X 1/8	1/4 X 1/4	3.4	SFX2-5/8	5/8 X 1/16**	5/8 X 3/8	2.6
SHX1-1/2	3/8 X 1/16**	3/8 X 1/4	0.7	SKX1-1/16	1/4 X 1/8	1/4 X 1/4	3.3	SFX2-11/16	5/8 X 1/16**	5/8 X 3/8	2.5
SHX1-9/16	3/8 X 1/16**	3/8 X 1/4	0.7	SKX1-1/8	1/4 X 1/8	1/4 X 1/4	3.3	SFX2-3/4	5/8 X 1/16**	5/8 X 3/8	2.3
SHX1-5/8	3/8 X 1/16**	3/8 X 1/4	0.6	SKX1-3/16	1/4 X 1/8	1/4 X 1/4	3.2	SFX2-13/16	3/4 X 1/16**	3/4 X 7/16	2.2
SHX1-11/16	NO K.S.	---	0.5	SKX1-1/4	1/4 X 1/8	1/4 X 1/4	3.2	SFX2-7/8	3/4 X 1/16**	3/4 X 7/16	2.1
SDSX1/2	NO. K.S.	---	1.7	SKX1-5/16	5/16 X 5/32	5/16 X 5/16	3.1	SFX2-15/16	3/4 X 1/32**	3/4 X 13/32	2.0
SDSX9/16	1/8 X 1/16	1/8 X 1/8	1.7	SKX1-3/8	5/16 X 5/32	5/16 X 5/16	3.1	EX7/8	3/16 X 3/32	3/16 X 3/16	10.5
SDSX5/8	3/16 X 3/32	3/16 X 3/16	1.7	SKX1-7/16	3/8 X 3/16	3/8 X 3/8	3.0	EX15/16	1/4 X 1/8	1/4 X 1/4	10.6
SDSX11/16	3/16 X 3/32	3/16 X 3/16	1.7	SKX1-1/2	3/8 X 3/16	3/8 X 3/8	2.9	EX1	1/4 X 1/8	1/4 X 1/4	10.4
SDSX3/4	3/16 X 3/32	3/16 X 3/16	1.7	SKX1-9/16	3/8 X 3/16	3/8 X 3/8	2.8	EX1-1/16	1/4 X 1/8	1/4 X 1/4	10.4
SDSX13/16	3/16 X 3/32	3/16 X 3/16	1.6	SKX1-5/8	3/8 X 3/16	3/8 X 3/8	2.8	EX1-1/8	1/4 X 1/8	1/4 X 1/4	10.4
SDSX7/8	3/16 X 3/32	3/16 X 3/16	1.6	SKX1-11/16	3/8 X 3/16	3/8 X 3/8	2.7	EX1-3/16	1/4 X 1/8	1/4 X 1/4	10.3
SDSX15/16	1/4 X 1/8	1/4 X 1/4	1.6	SKX1-3/4	3/8 X 3/16	3/8 X 3/8	2.6	EX1-1/4	1/4 X 1/8	1/4 X 1/4	10.3

* Bushings with 1/2" wide keyway will be shipped unless the 5/8" wide keyway is specified when ordering.
 * All 1/2" bore sizes are stocked without a keyseat. A standard keyseat 1/8" X 1/16" is available upon request.

§ Others sizes manufactured in ductile iron.

** Shallow keyseat Baldor supplies the key
 Keys not supplied for standard keyseat dimension.

For more details and additional products, see complete Baldor•Maska® Product Catalog or www.baldor.com

QD BUSHINGS STANDARD STOCK BORES (INCHES)

Part Number	Keyseat	Key	Wt	Part Number	Keyseat	Key	Wt	Part Number	Keyseat	Key	Wt
EX1-5/16	5/16 X 5/32	5/16 X5/16	10.3	FX2-13/16	3/4 X 3/8	3/4 X 3/4	12.8	JX4-3/8	1 X 1/8**	1 X 5/8	12.9
EX1-3/8	5/16 X 5/32	5/16 X5/16	10.1	FX2-7/8	3/4 X 3/8	3/4 X 3/4	11.7	JX4-7/16	1 X 1/8**	1 X 5/8	11.5
EX1-7/16	3/8 X 3/16	3/8 X 3/8	10.0	FX2-15/16	3/4 X 3/8	3/4 X 3/4	12.2	JX4-1/2	1 X 1/8**	1 X 5/8	11.8
EX1-1/2	3/8 X 3/16	3/8 X 3/8	10.1	FX3	3/4 X 3/8	3/4 X 3/4	11.2	MX2	1/2 X 1/4	1/2 X 1/2	59.2
EX1-9/16	3/8 X 3/16	3/8 X 3/8	9.8	FX3-1/16	3/4 X 3/8	3/4 X 3/4	11.7	MX2-1/8	1/2 X 1/4	1/2 X 1/2	58.5
EX1-5/8	3/8 X 3/16	3/8 X 3/8	9.6	FX3-1/8	3/4 X 3/8	3/4 X 3/4	11.4	MX2-3/16	1/2 X 1/4	1/2 X 1/2	58.1
EX1-11/16	3/8 X 3/16	3/8 X 3/8	9.7	FX3-3/16	3/4 X 3/8	3/4 X 3/4	11.1	MX2-1/4	1/2 X 1/4	1/2 X 1/2	57.7
EX1-3/4	3/8 X 3/16	3/8 X 3/8	9.5	FX3-1/4	3/4 X 3/8	3/4 X 3/4	10.8	MX2-3/8	5/8 X 5/16	5/8 X 5/8	56.9
EX1-13/16	1/2 X 1/4	1/2 X 1/2	9.3	FX3-5/16	7/8 X 3/16**	7/8 X 5/8	11.0	MX2-7/16	5/8 X 5/16	5/8 X 5/8	56.5
EX1-7/8	1/2 X 1/4	1/2 X 1/2	9.1	FX3-3/8	7/8 X 3/16**	7/8 X 5/8	10.7	MX2-1/2	5/8 X 5/16	5/8 X 5/8	56.1
EX1-15/16	1/2 X 1/4	1/2 X 1/2	9.1	FX3-7/16	7/8 X 3/16**	7/8 X 5/8	10.4	MX2-9/16	5/8 X 5/16	5/8 X 5/8	55.7
EX2	1/2 X 1/4	1/2 X 1/2	8.9	FX3-1/2	7/8 X 3/16**	7/8 X 5/8	10.1	MX2-5/8	5/8 X 5/16	5/8 X 5/8	55.2
EX2-1/16	1/2 X 1/4	1/2 X 1/2	8.7	FX3-9/16	7/8 X 3/16**	7/8 X 5/8	9.8	MX2-11/16	5/8 X 5/16	5/8 X 5/8	54.7
EX2-1/8	1/2 X 1/4	1/2 X 1/2	8.6	FX3-5/8	7/8 X 3/16**	7/8 X 5/8	9.4	MX2-3/4	5/8 X 5/16	5/8 X 5/8	54.3
EX2-3/16	1/2 X 1/4	1/2 X 1/2	8.5	FX3-11/16	7/8 X 3/16**	7/8 X 5/8	9.1	MX2-13/16	3/4 X 3/8	3/4 X 3/4	53.8
EX2-1/4	1/2 X 1/4	1/2 X 1/2	8.3	FX3-3/4	7/8 X 3/16**	7/8 X 5/8	8.8	MX2-7/8	3/4 X 3/8	3/4 X 3/4	53.3
EX2-1/4KW5/8	5/8 X 5/16	5/8 X 5/8	7.6	FX3-13/16	1 X 1/8**	1 X 5/8	8.5	MX2-15/16	3/4 X 3/8	3/4 X 3/4	52.8
EX2-5/16	5/8 X 5/16	5/8 X 5/8	8.2	FX3-7/8	1 X 1/8**	1 X 5/8	8.2	MX3	3/4 X 3/8	3/4 X 3/4	52.3
EX2-3/8	5/8 X 5/16	5/8 X 5/8	8.0	FX3-15/16	1 X 1/8**	1 X 5/8	7.8	MX3-1/8	3/4 X 3/8	3/4 X 3/4	51.2
EX2-7/16	5/8 X 5/16	5/8 X 5/8	7.9	FX4	NO K.S.	---	7.0	MX3-3/16	3/4 X 3/8	3/4 X 3/4	50.7
EX2-1/2	5/8 X 5/16	5/8 X 5/8	7.9	JX1-7/16	3/8 X 3/16	3/8 X 3/8	27.7	MX3-1/4	3/4 X 3/8	3/4 X 3/4	50.1
EX2-9/16	5/8 X 5/16	5/8 X 5/8	7.5	JX1-1/2	3/8 X 3/16	3/8 X 3/8	27.6	MX3-5/16	7/8 X 7/16	7/8 X 7/8	49.6
EX2-5/8	5/8 X 5/16	5/8 X 5/8	7.6	JX1-9/16	3/8 X 3/16	3/8 X 3/8	27.4	MX3-3/8	7/8 X 7/16	7/8 X 7/8	49.0
EX2-11/16	5/8 X 5/16	5/8 X 5/8	7.4	JX1-5/8	3/8 X 3/16	3/8 X 3/8	27.3	MX3-7/16	7/8 X 7/16	7/8 X 7/8	48.4
EX2-3/4	5/8 X 5/16	5/8 X 5/8	7.1	JX1-11/16	3/8 X 3/16	3/8 X 3/8	27.1	MX3-1/2	7/8 X 7/16	7/8 X 7/8	47.8
EX2-13/16	3/4 X 3/8	3/4 X 3/4	6.8	JX1-3/4	3/8 X 3/16	3/8 X 3/8	26.9	MX3-5/8	7/8 X 7/16	7/8 X 7/8	49.2
EX2-7/8	3/4 X 3/8	3/4 X 3/4	6.6	JX1-13/16	1/2 X 1/4	1/2 X 1/2	26.7	MX3-11/16	7/8 X 7/16	7/8 X 7/8	48.5
EX2-15/16	3/4 X 1/8**	3/4 X 1/2	6.8	JX1-7/8	1/2 X 1/4	1/2 X 1/2	26.4	MX3-3/4	7/8 X 7/16	7/8 X 7/8	48.3
EX3	3/4 X 1/8**	3/4 X 1/2	6.8	JX1-15/16	1/2 X 1/4	1/2 X 1/2	26.2	MX3-13/16	1 X 1/2	1 X 1	47.2
EX3-1/16	3/4 X 1/8**	3/4 X 1/2	6.5	JX2	1/2 X 1/4	1/2 X 1/2	26.0	MX3-7/8	1 X 1/2	1 X 1	46.4
EX3-1/8	3/4 X 1/8**	3/4 X 1/2	6.2	JX2-1/16	1/2 X 1/4	1/2 X 1/2	25.6	MX3-15/16	1 X 1/2	1 X 1	45.9
EX3-3/16	3/4 X 1/8**	3/4 X 1/2	6.0	JX2-1/8	1/2 X 1/4	1/2 X 1/2	25.5	MX4	1 X 1/2	1 X 1	45.4
EX3-1/4	3/4 X 1/8**	3/4 X 1/2	5.8	JX2-3/16	1/2 X 1/4	1/2 X 1/2	25.2	MX4-1/8	1 X 1/2	1 X 1	43.9
EX3-5/16	7/8 X 1/16**	7/8 X 1/2	5.7	JX2-1/4	1/2 X 1/4	1/2 X 1/2	25.1	MX4-3/16	1 X 1/2	1 X 1	43.1
EX3-3/8	7/8 X 1/16**	7/8 X 1/2	5.5	JX2-5/16	5/8 X 5/16	5/8 X 5/8	24.4	MX4-1/4	1 X 1/2	1 X 1	42.2
EX3-7/16	7/8 X 1/16**	7/8 X 1/2	5.5	JX2-3/8	5/8 X 5/16	5/8 X 5/8	24.5	MX4-5/16	1 X 1/2	1 X 1	42.1
EX3-1/2	7/8 X 1/16**	7/8 X 1/2	5.0	JX2-7/16	5/8 X 5/16	5/8 X 5/8	24.3	MX4-3/8	1 X 1/2	1 X 1	40.9
FX1	1/4 X 1/8	1/4 X 1/4	18.0	JX2-1/2	5/8 X 5/16	5/8 X 5/8	23.9	MX4-7/16	1 X 1/2	1 X 1	39.9
FX1-1/16	1/4 X 1/8	1/4 X 1/4	17.9	JX2-9/16	5/8 X 5/16	5/8 X 5/8	23.5	MX4-1/2	1 X 1/2	1 X 1	39.5
FX1-1/8	1/4 X 1/8	1/4 X 1/4	17.9	JX2-5/8	5/8 X 5/16	5/8 X 5/8	23.4	MX4-9/16	1-1/4 X 5/8	1-1/4 X 1-1/4	38.2
FX1-3/16	1/4 X 1/8	1/4 X 1/4	17.6	JX2-11/16	5/8 X 5/16	5/8 X 5/8	23.0	MX4-5/8	1-1/4 X 5/8	1-1/4 X 1-1/4	37.7
FX1-1/4	1/4 X 1/8	1/4 X 1/4	17.5	JX2-3/4	5/8 X 5/16	5/8 X 5/8	22.7	MX4-11/16	1-1/4 X 5/8	1-1/4 X 1-1/4	37.3
FX1-5/16	5/16 X 5/32	5/16 X5/16	17.4	JX2-13/16	3/4 X 3/8	3/4 X 3/4	22.2	MX4-3/4	1-1/4 X 5/8	1-1/4 X 1-1/4	35.0
FX1-3/8	5/16 X 5/32	5/16 X5/16	17.3	JX2-7/8	3/4 X 3/8	3/4 X 3/4	21.9	MX4-13/16	1-1/4 X 5/8	1-1/4 X 1-1/4	34.0
FX1-7/16	3/8 X 3/16	3/8 X 3/8	17.2	JX2-15/16	3/4 X 3/8	3/4 X 3/4	21.7	MX4-7/8	1-1/4 X 1/4**	1-1/4 X 7/8	34.1
FX1-1/2	3/8 X 3/16	3/8 X 3/8	17.0	JX3	3/4 X 3/8	3/4 X 3/4	21.3	MX4-15/16	1-1/4 X 1/4**	1-1/4 X 7/8	42.3
FX1-9/16	3/8 X 3/16	3/8 X 3/8	16.9	JX3-1/16	3/4 X 3/8	3/4 X 3/4	20.9	MX5	1-1/4 X 1/4**	1-1/4 X 7/8	32.6
FX1-5/8	3/8 X 3/16	3/8 X 3/8	16.8	JX3-1/8	3/4 X 3/8	3/4 X 3/4	20.6	MX5-1/8	1-1/4 X 1/4**	1-1/4 X 7/8	30.9
FX1-11/16	3/8 X 3/16	3/8 X 3/8	16.7	JX3-3/16	3/4 X 3/8	3/4 X 3/4	20.3	MX5-3/16	1-1/4 X 1/4**	1-1/4 X 7/8	30.1
FX1-3/4	3/8 X 3/16	3/8 X 3/8	16.5	JX3-1/4	3/4 X 3/8	3/4 X 3/4	19.8	MX5-1/4	1-1/4 X 1/4**	1-1/4 X 7/8	29.1
FX1-13/16	1/2 X 1/4	1/2 X 1/2	16.3	JX3-5/16	7/8 X 7/16	7/8 X 7/8	19.5	MX5-5/16	1-1/4 X 1/4**	1-1/4 X 7/8	29.0
FX1-7/8	1/2 X 1/4	1/2 X 1/2	16.1	JX3-3/8	7/8 X 7/16	7/8 X 7/8	19.0	MX5-3/8	1-1/4 X 1/4**	1-1/4 X 7/8	27.3
FX1-15/16	1/2 X 1/4	1/2 X 1/2	15.9	JX3-7/16	7/8 X 7/16	7/8 X 7/8	18.6	MX5-7/16	1-1/4 X 1/4**	1-1/4 X 7/8	26.5
FX2	1/2 X 1/4	1/2 X 1/2	15.7	JX3-1/2	7/8 X 7/16	7/8 X 7/8	18.3	MX5-1/2	1-1/4 X 1/4**	1-1/4 X 7/8	25.9
FX2-1/16	1/2 X 1/4	1/2 X 1/2	15.5	JX3-9/16	7/8 X 7/16	7/8 X 7/8	16.8	NX2-5/8	5/8 X 5/16	5/8 X 5/8	80.0
FX2-1/8	1/2 X 1/4	1/2 X 1/2	15.3	JX3-5/8	7/8 X 7/16	7/8 X 7/8	17.4	NX2-3/4	5/8 X 5/16	5/8 X 5/8	78.9
FX2-3/16	1/2 X 1/4	1/2 X 1/2	15.1	JX3-11/16	7/8 X 7/16	7/8 X 7/8	17.1	NX2-15/16	3/4 X 3/8	3/4 X 3/4	77.2
FX2-1/4	1/2 X 1/4	1/2 X 1/2	15.0	JX3-3/4	7/8 X 7/16	7/8 X 7/8	16.6	NX3	3/4 X 3/8	3/4 X 3/4	76.6
FX2-1/4KW5/8	5/8 X 5/16	5/8 X 5/8	15.0	JX3-13/16	1 X 1/2	1 X 1	17.1	NX3-1/4	3/4 X 3/8	3/4 X 3/4	74.0
FX2-5/16	5/8 X 5/16	5/8 X 5/8	14.7	JX3-7/8	1 X 3/8**	1 X 7/8	16.6	NX3-5/16	7/8 X 7/16	7/8 X 7/8	73.3
FX2-3/8	5/8 X 5/16	5/8 X 5/8	14.5	JX3-15/16	1 X 3/8**	1 X 7/8	16.1	NX3-3/8	7/8 X 7/16	7/8 X 7/8	72.6
FX2-7/16	5/8 X 5/16	5/8 X 5/8	14.3	JX4	1 X 1/8**	1 X 5/8	15.6	NX3-7/16	7/8 X 7/16	7/8 X 7/8	71.9
FX2-1/2	5/8 X 5/16	5/8 X 5/8	14.0	JX4-1/16	1 X 1/8**	1 X 5/8	15.2	NX3-1/2	7/8 X 7/16	7/8 X 7/8	71.2
FX2-9/16	5/8 X 5/16	5/8 X 5/8	13.8	JX4-1/8	1 X 1/8**	1 X 5/8	14.7	NX3-5/8	7/8 X 7/16	7/8 X 7/8	74.6
FX2-5/8	5/8 X 5/16	5/8 X 5/8	13.5	JX4-3/16	1 X 1/8**	1 X 5/8	14.3	NX3-11/16	7/8 X 7/16	7/8 X 7/8	69.0
FX2-11/16	5/8 X 5/16	5/8 X 5/8	13.3	JX4-1/4	1 X 1/8**	1 X 5/8	13.8	NX3-3/4	7/8 X 7/16	7/8 X 7/8	68.2
FX2-3/4	5/8 X 5/16	5/8 X 5/8	13.1	JX4-5/16	1 X 1/8**	1 X 5/8	13.3	NX3-7/8	1 X 1/2	1 X 1	66.6

* Bushings with 1/2" wide keyway will be shipped unless the 5/8" wide keyway is specified when ordering.
 ° All 1/2" bore sizes are stocked without a keyseat. A standard keyseat 1/8" X 1/16" is available upon request.
 § Other sizes manufactured in ductile iron.

** Shallow keyseat Baldor supplies the key
 Keys not supplied for standard keyseat dimension.

QD BUSHINGS STANDARD STOCK BORES (INCHES)

Part Number	Keyseat	Key	Wt
NX3-15/16	1 X 1/2	1 X 1	65.8
NX4	1 X 1/2	1 X 1	65.0
NX4-3/16	1 X 1/2	1 X 1	62.4
NX4-1/8	1 X 1/2	1 X 1	63.3
NX4-1/4	1 X 1/2	1 X 1	61.6
NX4-5/16	1 X 1/2	1 X 1	66.5
NX4-3/8	1 X 1/2	1 X 1	59.8
NX4-7/16	1 X 1/2	1 X 1	58.9
NX4-1/2	1 X 1/2	1 X 1	57.9
NX4-9/16	1-1/4 X 5/8	1-1/4 X 1-1/4	62.5
NX4-5/8	1-1/4 X 5/8	1-1/4 X 1-1/4	56.0
NX4-11/16	1-1/4 X 5/8	1-1/4 X 1-1/4	55.1
NX4-3/4	1-1/4 X 5/8	1-1/4 X 1-1/4	54.1
NX4-7/8	1-1/4 X 5/8	1-1/4 X 1-1/4	52.1
NX4-15/16	1-1/4 X 5/8	1-1/4 X 1-1/4	51.1
NX5	1-1/4 X 5/8	1-1/4 X 1-1/4	50.1
NX5-1/8	1-1/4 X 1/4** §	1-1/4 X 7/8	48.0
NX5-3/16	1-1/4 X 1/4** §	1-1/4 X 7/8	46.9
NX5-1/4	1-1/4 X 1/4** §	1-1/4 X 7/8	49.9
NX5-5/16	1-1/4 X 1/4** §	1-1/4 X 7/8	48.8
NX5-3/8	1-1/4 X 1/4** §	1-1/4 X 7/8	47.8
NX5-7/16	1-1/4 X 1/4** §	1-1/4 X 7/8	46.8
NX5-1/2	1-1/4 X 1/4** §	1-1/4 X 7/8	45.4
NX5-11/16	1-1/2 X 1/4** §	1-1/2 X 1	48.0
NX5-3/4	1-1/2 X 1/4** §	1-1/2 X 1	43.6
NX5-7/8	1-1/2 X 1/4** §	1-1/2 X 1	38.5
NX5-15/16	1-1/2 X 1/8** §	1-1/2 X 7/8	39.3
NX6	1-1/2 X 1/8** §	1-1/2 X 7/8	39.0
PX2-15/16	3/4 X 3/8	3/4 X 3/4	130.3
PX3-3/16	3/4 X 3/8	3/4 X 3/4	127.4
PX3-1/4	3/4 X 3/8	3/4 X 3/4	129.9
PX3-3/8	7/8 X 7/16	7/8 X 7/8	125.1
PX3-7/16	7/8 X 7/16	7/8 X 7/8	124.2
PX3-1/2	7/8 X 7/16	7/8 X 7/8	123.4
PX3-5/8	7/8 X 7/16	7/8 X 7/8	121.7
PX3-3/4	7/8 X 7/16	7/8 X 7/8	119.9
PX3-7/8	1 X 1/2	1 X 1	118.1
PX3-15/16	1 X 1/2	1 X 1	117.2
PX4	1 X 1/2	1 X 1	116.2
PX4-3/16	1 X 1/2	1 X 1	113.5
PX4-1/4	1 X 1/2	1 X 1	112.3
PX4-3/8	1 X 1/2	1 X 1	110.2
PX4-7/16	1 X 1/2	1 X 1	109.2
PX4-1/2	1 X 1/2	1 X 1	108.1
PX4-5/8	1-1/4 X 5/8	1-1/4 X 1-1/4	105.9
PX4-11/16	1-1/4 X 5/8	1-1/4 X 1-1/4	104.8
PX4-3/4	1-1/4 X 5/8	1-1/4 X 1-1/4	103.7
PX4-7/8	1-1/4 X 5/8	1-1/4 X 1-1/4	101.4
PX4-15/16	1-1/4 X 5/8	1-1/4 X 1-1/4	110.0
PX5	1-1/4 X 5/8	1-1/4 X 1-1/4	106.5
PX5-1/8	1-1/4 X 5/8	1-1/4 X 1-1/4	96.6
PX5-1/4	1-1/4 X 5/8	1-1/4 X 1-1/4	94.1
PX5-5/16	1-1/4 X 5/8	1-1/4 X 1-1/4	97.5
PX5-3/8	1-1/4 X 5/8	1-1/4 X 1-1/4	91.6
PX5-7/16	1-1/4 X 5/8	1-1/4 X 1-1/4	90.3
PX5-1/2	1-1/4 X 5/8	1-1/4 X 1-1/4	88.9
PX5-3/4	1-1/2 X 1/4** §	1-1/2 X 1	95.0
PX5-7/8	1-1/2 X 1/4** §	1-1/2 X 1	80.8
PX5-15/16	1-1/2 X 1/4** §	1-1/2 X 1	91.0
PX6	1-1/2 X 1/4** §	1-1/2 X 1	77.9
PX6-1/16	1-1/2 X 1/4** §	1-1/2 X 1	76.5
PX6-1/4	1-1/2 X 1/4** §	1-1/2 X 1	72.1
PX6-7/16	1-1/2 X 1/4** §	1-1/2 X 1	79.0
PX6-1/2	1-1/2 X 1/4** §	1-1/2 X 1	66.0
PX6-3/4	1-3/4 X 1/8** §	1-3/4 X 1	73.0
PX6-7/8	1-3/4 X 1/8** §	1-3/4 X 1	58.0

Part Number	Keyseat	Key	Wt
PX6-15/16	1-3/4 X 1/8** §	1-3/4 X 1	54.7
PX7	1-3/4 X 1/8** §	1-3/4 X 1	53.1
WX4-7/16	1 X 1/2	1 X 1	239.8
WX4-1/4	1 X 1/2	1 X 1	248.3
WX4-11/16	1-1/4 X 5/8	1-1/4 X 1-1/4	239.3
WX4-5/8	1-1/4 X 5/8	1-1/4 X 1-1/4	275.0
WX4-3/4	1-1/4 X 5/8	1-1/4 X 1-1/4	233.2
WX4-7/8	1-1/4 X 5/8	1-1/4 X 1-1/4	233.0
WX4-15/16	1-1/4 X 5/8	1-1/4 X 1-1/4	275.0
WX5	1-1/4 X 5/8	1-1/4 X 1-1/4	265.0
WX5-1/4	1-1/4 X 5/8	1-1/4 X 1-1/4	244.0
WX5-7/16	1-1/4 X 5/8	1-1/4 X 1-1/4	255.0
WX5-1/2	1-1/4 X 5/8	1-1/4 X 1-1/4	223.0
WX5-11/16	1-1/4 X 5/8	1-1/4 X 1-1/4	255.0
WX5-3/4	1-1/2 X 3/4	1-1/2 X 1-1/2	230.0
WX5-7/8	1-1/2 X 3/4	2 X 1	200.0
WX5-15/16	1-1/2 X 3/4	1-1/2 X 1-1/2	203.7
WX6	1-1/2 X 3/4	1-1/2 X 1-1/2	237.0
WX6-1/4	1-1/2 X 3/4	1-1/2 X 1-1/2	194.9
WX6-7/16	1-1/2 X 3/4	1-1/2 X 1-1/2	189.3
WX6-1/2	1-1/2 X 3/4	1-1/2 X 1-1/2	187.4
WX6-3/4	1-3/4 X 3/4	1-3/4 X 1-1/2	179.8
WX6-7/8	1-3/4 X 3/4	1-3/4 X 1-1/2	198.0
WX6-15/16	1-3/4 X 3/4	1-3/4 X 1-1/2	185.0
WX7	1-3/4 X 3/4	1-3/4 X 1-1/2	171.8
WX7-1/8	1-3/4 X 3/4	1-3/4 X 1-1/2	170.0
WX7-1/4	1-3/4 X 3/4	1-3/4 X 1-1/2	175.0
WX7-3/8	1-3/4 X 3/4	1-3/4 X 1-1/2	161.7
WX7-7/16	1-3/4 X 3/4	1-3/4 X 1-1/2	160.0
WX7-1/2	1-3/4 X 3/4	1-3/4 X 1-1/2	154.9
WX7-3/4	2 X 1/4**	2 X 1	163.0
WX8	2 X 1/4** §	2 X 1	172.0
WX8-1/4	2 X 1/4** §	2 X 1	153.0
WX8-1/2	2 X 1/4** §	2 X 1	133.0
WX8-1/2KW2X3/8	2 X 3/8** §	2 X 1-1/8	133.0
SX5-1/2	1-1/4 X 5/8	1-1/4 X 1-1/4	485.0
SX5-3/4	1-1/2 X 3/4	1-1/2 X 1-1/2	476.6
SX5-7/8	1-1/2 X 3/4	1-1/2 X 1-1/2	472.1
SX5-15/16	1-1/2 X 3/4	1-1/2 X 1-1/2	470.2
SX6	1-1/2 X 3/4	1-1/2 X 1-1/2	447.0
SX6-1/4	1-1/2 X 3/4	1-1/2 X 1-1/2	458.6
SX6-7/16	1-1/2 X 3/4	1-1/2 X 1-1/2	451.6
SX6-1/2	1-1/2 X 3/4	1-1/2 X 1-1/2	449.3
SX6-3/4	1-3/4 X 3/4	1-3/4 X 1-1/2	440.6
SX6-15/16	1-3/4 X 3/4	1-3/4 X 1-1/2	430.8
SX7	1-3/4 X 3/4	1-3/4 X 1-1/2	425.5
SX7-1/4	1-3/4 X 3/4	1-3/4 X 1-1/2	394.0
SX7-1/2	1-3/4 X 3/4	1-3/4 X 1-1/2	404.8
SX7-3/4	2 X 3/4	2 X 1-1/2	392.1
SX7-7/8	2 X 3/4	2 X 1-1/2	386.6
SX8	2 X 3/4	2 X 1-1/2	378.5
SX8-1/4	2 X 3/4	2 X 1-1/2	367.3
SX8-1/2	2 X 3/4	2 X 1-1/2	353.8
SX8-1/2KW2X1	2 X 1	2 X 1-3/4	346.0
SX8-1/2KW2X3/4	2 X 3/4	2 X 1-1/2	346.0
SX8-3/4	2 X 3/4	2 X 1-1/2	340.1
SX8-7/8	2 X 3/4	2 X 1-1/2	333.4
SX9	2 X 3/4	2 X 1-1/2	326.1
SX9-1/4	2-1/2 X 1/2** §	2-1/2 X 1-3/8	288.0
SX9-3/8	2-1/2 X 1/2** §	2-1/2 X 1-3/8	303.3
SX9-1/2	2-1/2 X 1/2** §	2-1/2 X 1-3/8	296.4
SX9-3/4	2-1/2 X 3/8** §	2-1/2 X 1-1/4	281.1
SX9-3/4KW2X1/4	2 X 1/4	---	256.0
SX9-7/8	2-1/2 X 3/8** §	2-1/2 X 1-1/8	271.4
SX10	2-1/2 X 1/4** §	2-1/2 X 1-1/8	241.0

Part Number	Keyseat	Key	Wt
ZX10-1/4	2-1/2 X 7/8	2-1/2 X 1-3/4	476.9
ZX11-3/4	3X.819	3 X 1.638	478.8

* Bushings with 1/2" wide keyway will be shipped unless the 5/8" wide keyway is specified when ordering.
 • All 1/2" bore sizes are stocked without a keyseat. A standard keyseat 1/8" X 1/16" is available upon request.
 § Others sizes manufactured in ductile iron.

** Shallow keyseat Baldor supplies the key
 Keys not supplied for standard keyseat dimension.

QD BUSHINGS STANDARD STOCK BORES (MILLIMETERS)


Note: In metric bores, a key is not supplied for shallow keyway. The metric system does not refer to keyseat or keyway dimensions as does the English system; instead, dimensions are given for the key itself. For nominal diameter up to 22 mm, the key is square in shape. For nominal diameter over 22 mm, the key is rectangular in shape. This meets ISO standards.

	Part Number	Keyseat	Key	Weight		Part Number	Keyseat	Key	Weight		Part Number	Keyseat	Key	Weight
L	LX14MM	5 X 2.3	5 X 5	0.9	SD	SDX25MM	8 X 3.3	8 X 7	1.9	E	FX45MM	14 X 3.8	14 X 9	16.4
	LX15MM	5 X 2.3	5 X 5	0.9		SDX28MM	8 X 3.3	8 X 7	1.8		FX48MM	14 X 3.8	14 X 9	16.1
	LX16MM	5 X 2.3	5 X 5	0.9		SDX30MM	8 X 3.3	8 X 7	1.8		FX50MM	14 X 3.8	14 X 9	15.8
	LX18MM	6 X 2.8	6 X 6	0.9		SDX32MM	10 X 3.3	11 X 3.3	1.7		FX55MM	16 X 4.3	16 X 10	15.2
	LX19MM	6 x 2.8	6 x 6	0.9		SDX35MM	10 X 3.3	11 X 3.3	1.6		FX60MM	18 X 4.4	18 X 11	14.5
	LX20MM	6 X 2.8	6 X 6	0.9		SDX38MM	10 X 3.3	11 X 3.3	1.5		FX65MM	18 X 4.4	18 X 11	13.8
	LX22MM	6 X 2.8	6 X 6	0.8		SDX40MM	12 X 3.3	12 X 8	1.4		FX70MM	20 X 4.9	20 X 12	13.1
	LX24MM	8 X 3.3	8 X 7	0.8		SDX42MM	12 X 3.3	12 X 8	1.3		FX75MM	20 X 4.9	20 X 12	12.2
	LX25MM	8 X 3.3	8 X 7	0.8		SDX48MM	14 X 3.8	14 X 9	1.2		FX80MM	22 X 5.4	22 X 14	11.3
	LX28MM	8 x 3.3	8 x 7	0.7		SKX14MM	5 X 2.3	5 X 5	3.6		FX85MM	22 X 5.4	22 X 14	10.2
	LX30MM	8 X 3.3	8 X 7	0.6		SKX15MM	5 X 2.3	5 X 5	3.7		FX90MM	25 X 5.4	25 X 14	9.2
	LX32MM	10 X 3.3	10 X 8	0.6		SKX16MM	5 X 2.3	5 X 5	3.6		FX95MM	25 X 4.4	25 X 14	8.2
	LX35MM	10 X 1.3**	10 X 6**	0.5		SKX18MM	6 X 2.8	6 X 6	3.6		FX100MM	No. K.S.	No K.S.	7.3
	LX38MM	10 X 1.3**	10 X 6**	0.3		SKX19MM	6 X 2.8	6 X 6	3.5		JX50MM	14 X 3.8	14 X 9	26.1
JA	JAX14MM	5 X 2.3	5 X 5	0.6	SKX20MM	6 X 2.8	6 X 6	3.5	JX55MM	16 X 4.3	16 X 10	25.3		
	JAX15MM	5 x 2.3	5 x 5	0.5	SKX22MM	6 X 2.8	6 X 6	3.4	JX60MM	18 X 4.4	18 X 11	24.5		
	JAX16MM	6 X 2.8	6 X 6	0.5	SKX24MM	8 X 3.3	8 X 7	3.4	JX65MM	18 X 4.4	18 X 11	23.7		
	JAX18MM	6 X 2.8	6 X 6	0.5	SKX25MM	8 X 3.3	8 X 7	3.4	JX70MM	20 X 4.9	20 X 12	22.5		
	JAX19MM	6 X 2.8	6 X 6	0.4	SKX28MM	8 X 3.3	8 X 7	3.3	JX75MM	20 X 4.9	20 X 12	21.7		
	JAX20MM	6 X 2.8	6 X 6	0.4	SKX30MM	8 X 3.3	8 X 7	3.2	JX80MM	22 X 5.4	22 X 14	20.4		
	JAX22MM	6 X 2.8	6 X 6	0.4	SKX32MM	10 X 3.3	10 X 8	3.1	JX85MM	22 X 5.4	22 X 14	19.4		
	JAX24MM	8 X 2.3**	8 X 6**	0.4	SKX35MM	10 X 3.3	10 X 8	3.0	JX90MM	25 X 5.4	25 X 14	18.2		
SH	JAX25MM	8 X 2.3**	8 X 6**	0.4	SKX38MM	10 X 3.3	10 X 8	2.9	JX95MM	25 X 5.4	25 X 14	16.8		
	JAX28MM	8 X 1.3**	8 X 5**	0.4	SKX40MM	12 X 3.3	12 X 8	2.8	JX100MM	28 X 6.4	28 X 16	15.0		
	SHX14MM	5 X 2.3	5 X 5	1.2	SKX42MM	12 X 3.3	12 X 8	2.7	JX110MM	28 X 5.4**	28 X 15**	12.2		
	SHX15MM	5 X 2.3	5 X 5	1.1	SKX45MM	14 X 3.8	14 X 9	2.6	JX115MM	32 X 1.2**	32 X 11.8**	10.8		
	SHX16MM	5 X 2.3	5 X 5	1.1	SKX48MM	14 X 3.8	14 X 9	2.4	MX70MM	20 X 4.9	20 X 12	54.0		
	SHX18MM	6 X 2.8	6 X 6	1.1	SKX50MM	14 X 3.8	14 X 9	2.3	MX75MM	20 X 4.9	20 X 12	52.3		
	SHX19MM	6 X 2.8	6 X 6	1.1	SKX55MM	16 X 4.3	16 X 10	2.0	MX80MM	22 X 5.4	22 X 5.4	55.0		
	SHX20MM	6 X 2.8	6 X 6	1.1	SKX60MMNOKW			1.6	MX85MM	22 X 5.4	22 X 5.4	55.0		
	SHX22MM	6 X 2.8	6 X 6	1.0	SKX60MM	18 X 3.4**	18 X 10**	1.6	MX90MM	25 X 5.4	25 X 14	51.4		
	SHX24MM	8 X 3.3	8 X 7	1.0	SFX20MM	6 X 2.8	6 X 6	4.6	MX95MM	25 X 5.4	25 X 14	50.0		
	SHX25MM	8 X 3.3	8 X 7	1.0	SFX24MM	8 X 3.3	8 X 7	4.8	MX100MM	28 X 6.4	28 X 16	46.8		
	SHX28MM	8 X 3.3	8 X 7	0.9	SFX25MM	8 X 3.3	8 X 7	4.8	MX110MM	28 X 6.4	28 X 16	47.0		
	SHX30MM	8 X 3.3	8 X 7	0.9	SFX28MM	8 X 3.3	8 X 7	4.7	MX115MM	32 X 7.4	32 X 18	39.9		
	SHX32MM	10 X 3.3	10 X 8	0.8	SFX30MM	8 X 3.3	8 X 7	4.6	MX120MM	32 X 7.4	32 X 18	36.7		
SDS	SHX35MM	10 X 3.3	10 X 8	0.7	SFX32MM	10 X 3.3	10 X 8	4.5	MX125MM	32 X 7.4	32 X 18	33.5		
	SHX38MM	10 X 2.3**	10 X 7**	0.7	SFX35MM	10 X 3.3	10 X 8	4.4	MX130MM	32 X 7.4	32 X 18	30.9		
	SHX40MM	No. K.S.	No K.S.	0.6	SFX38MM	10 X 3.3	10 X 8	4.3	NX80MM	22 X 5.4	22 X 14	82.0		
	SDSX14MM	5 X 2.3	5 X 5	1.7	SFX40MM	12 X 3.3	12 X 8	4.2	NX90MM	25 X 5.4	25 X 14	75.0		
	SDSX15MM	5 X 2.3	5 X 5	1.7	SFX42MM	12 X 3.3	12 X 8	4.1	NX95MM	25 X 5.4	25 X 14	75.0		
	SDSX16MM	5 X 2.3	5 X 5	1.7	SFX45MM	14 X 3.8	14 X 9	3.9	NX100MM	28 X 6.4	28 X 16	72.0		
	SDSX18MM	6 X 2.8	6 X 6	1.7	SFX48MM	14 X 3.8	14 X 9	3.7	NX110MM	28 X 6.4	28 X 16	66.5		
	SDSX19MM	6 X 2.8	6 X 6	1.7	SFX50MM	14 X 3.8	14 X 9	3.6	NX115MM	32 X 7.4	32 X 18	60.8		
	SDSX20MM	6 X 2.8	6 X 6	1.7	SFX55MM	16 X 4.3	16 X 10	3.3	NX120MM	32 X 7.4	32 X 18	60.8		
	SDSX22MM	6 X 2.8	6 X 6	1.6	SFX60MM	18 X 4.4	18 X 11	2.9	NX125MM	32 X 7.4	32 X 18	57.5		
	SDSX24MM	8 X 3.3	8 X 7	1.5	SFX65MM	18 X 4.4	18 X 11	2.5	NX130MM	32 X 7.4	32 X 18	57.5		
	SDSX25MM	8 X 3.3	8 X 7	1.5	SFX70MM	20 X 4	20 X 8	2.2	NX135MM	36 X 4.4**	36 X 16**	39.3		
	SDSX28MM	8 X 3.3	8 X 7	1.5	EX35MM	10 X 3.3	10 X 8	10.0	NX140MM	36 X 4.4**	36 X 16**	45.4		
	SD	SDSX30MM	8 X 3.3	8 X 7	1.4	EX38MM	10 X 3.3	10 X 8	9.9	NX150MM	36 X 2.4**	36 X 14**	35.0	
SDSX32MM		10 X 3.3	10 X 8	1.4	EX40MM	12 X 3.3	12 X 8	9.9	PX100MM	28 X 6.4	28 X 16	120.0		
SDSX35MM		10 X 3.3	10 X 8	1.3	EX42MM	12 X 3.3	12 X 8	9.7	PX110MM	28 X 6.4	28 X 16	119.0		
SDSX38MM		10 X 3.3	10 X 8	1.2	EX45MM	14 X 3.8	14 X 9	9.4	PX120MM	32 X 7.4	32 X 18	120.0		
SDSX40MM		12 X 3.3	12 X 8	1.1	EX48MM	14 X 3.8	14 X 9	9.2	PX130MM	32 X 7.4	32 X 18	107.0		
SDSX42MM		12 X 3.3	12 X 8	1.1	EX50MM	14 X 3.8	14 X 9	9.0	PX140MM	36 X 8.4	36 X 20	101.3		
SDX14MM		5 X 2.3	5 X 5	2.2	EX55MM	16 X 4.3	16 X 10	8.6	PX145MM	36 X 8.4	36 X 20	95.7		
SDX15MM		5 X 2.3	5 X 5	2.1	EX60MM	18 X 4.4	18 X 11	8.1	PX150MM	36 X 8.4	36 X 20	90.0		
SDX16MM		5 X 2.3	5 X 5	2.1	EX65MM	18 X 4.4	18 X 11	7.6	PX160MM	40 X 9.4	40 X 22	90.0		
SDX18MM		6 X 2.8	6 X 6	2.0	EX70MM	20 X 4.9	20 X 12	7.1	PX170MM	40 X 4.4**	40 X 17**	75.0		
SDX19MM		6 X 2.8	6 X 6	2.1	EX75MM	20 X 4.9	20 X 12	6.5	WX120MM	32 X 7.4	32 X 18	265.0		
SDX20MM		6 X 2.8	6 X 6	2.1	EX80MM	22 X 5.4	22 X 14	5.8						
SDX22MM		6 X 2.8	6 X 6	2.0	EX85MM	22 X 5.4	22 X 14	5.6						
SDX24MM		8 X 3.3	8 X 7	1.9										

** Shallow keyseat

Note: All Bushings up to sizes M are manufactured in ductile iron. For all bore sizes key not supplied.





BK² Bushing



Note L Bushing replacement of the H bushing from Browning. See L Bushing drawing on page 339.

Features: Keyed on shaft and hub to reduce shock on the cap screws. Mostly used for applications with frequent stop and start or reverse needs. The taper on all BK² Bushings is 3/4" per foot on diameter. Type X 1 manufactured in cast or ductile iron, type 2 manufactured in ductile iron only. 100% interchangeable with licensed manufacturer's products. BK² Bushing is the most preferred style for fan blades assembly. Helps during blind installation.

How to order: Example: P1X1-7/16; P1=Bushing size. 1-1/16=Bore size (1-1/16"). Inch bore sizes are designated with the whole inch followed by the fraction. For example, a 1.5" diameter bore would be 1-1/2".

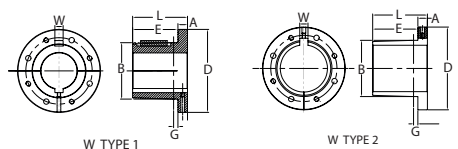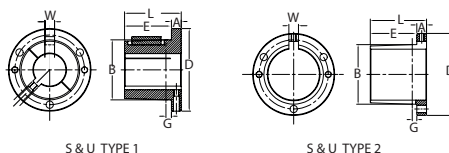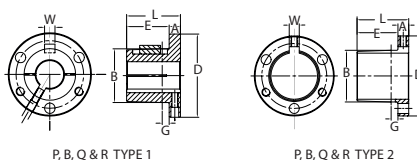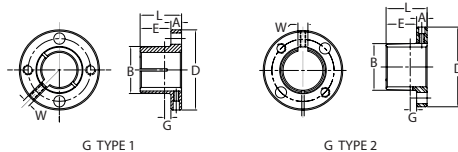

Type 1



Type 2

Part #	List Price	Mult. Sym.	Dimensions - Inches									Bore range		Cap Screws		Av. Wt. Lbs.	Wrench torque (In-Lbs.)
			L	A	E	B		D	M	W	G	Type 1	Type 2	No.	Size		
						Large End	Small End										
G	10.30	STB29	1	1/4	3/4	1.172	1.133	2	1-9/16	-	3/16	3/8 • 15/16	1	2	1/4-20 UNC X 5/8	.5	95
L	9.00	QDB20	1-11/32	11/32	1	1.625	1.570	2-1/2	2	-	3/16	3/8 • 1-3/8	1-7/16 • 1-1/2	2	1/4-20 UNC X 7/8	.8	95
P1	17.90	STB29	1-15/16	13/32	1-17/32	1.9375	1.8555	3	2-7/16	3/8	7/32	1/2 • 1-7/16	1-1/2 • 1-3/4	3	5/16-18 UNC X 1	1.3	192
P2	19.60	STB29	2-15/16	13/32	2-17/32	1.9375	1.7930	3	2-7/16	3/8	7/32	3/4 • 1-7/16	1-1/2 • 1-3/4	3	5/16-18 UNC X 1	1.5	192
B	17.90	STB29	1-15/16	1/2	1-7/16	2.625	2.5567	3-11/16	3-1/8	1/2	7/32	1/2 • 1-15/16	2 • 2-7/16	3	5/16-18 UNC X 1-1/4	1.8	192
Q1	35.20	STB29	2-1/2	17/32	1-31/32	2.875	2.7657	4-1/8	3-3/8	1/2	7/32	5/8 • 2-1/16	2-1/8 • 2-11/16	3	3/8-16 UNC X 1-1/4	3.5	348
Q2	38.50	STB29	3-1/2	17/32	2-31/32	2.875	2.7032	4-1/8	3-3/8	1/2	7/32	1 • 2-1/16	2-1/8 • 2-5/8	3	3/8-16 UNC X 1-1/4	4.5	348
R1	87.00	STB29	2-7/8	5/8	2-1/4	4.000	3.8750	5-3/8	4-5/8	3/4	1/4	1-1/8 • 2-13/16	2- 7/8 • 3-3/4	3	3/8-16 UNC X 1-3/4	7.5	348
R2	98.00	STB29	4-7/8	5/8	4-1/4	4.000	3.7500	5-3/8	4-5/8	3/4	1/4	1-3/8 • 2-13/16	2-7/8 • 3-5/8	3	3/8-16 UNC X 1-3/4	11	348
S1	173.00	STB29	4-3/8	3/4	3-5/8	4.625	4.4180	6-3/8	5-3/8	3/4	5/16	1-11/16 • 3-3/16	3-1/4 • 4-1/4	3	1/2-13 UNC X 2-1/4	13.5	840
S2	217.00	STB29	6-3/4	3/4	6	4.625	4.2696	6-3/8	5-3/8	3/4	5/16	1-7/8 • 3-3/16	3-1/4 • 4-3/16	3	1/2-13 UNC X 2-1/4	19	840
U0*	379.00	STB29	5-1/4	1-1/16	4-3/16	6.000	5.7656	8-3/8	7	1-1/4	7/16	2-3/8 • 3-3/16	-	3	5/8-11 UNC X 2-3/4	30	1680
U0*	379.00	STB29	4-15/16	3/4	4-3/16	6.000	5.7656	8-3/8	7	1-1/4	7/16	3-1/4 • 4-1/4	4-3/8 • 5-1/2	3	5/8-11 UNC X 2-3/4	27	1680
U1*	650.00	STB29	7-1/8	1-1/16	6-1/16	6.000	5.6485	8-3/8	7	1-1/4	7/16	2-3/8 • 4-1/4	4-3/8 • 5-1/2	3	5/8-11 UNC X 2-3/4	40	1680
W1*	1518.00	STB29	8-1/4	1-7/16	6-13/16	8.500	8.1016	12-1/2	10	1-1/4	7/16	3-3/8 • 6-3/16	6-1/4 • 7-7/16	4	3/4-10 UNC X 3	104	3000

Note L Bushing replacement of the H bushing from Browning

* Please contact Baldor for lead time and availability

For more details and additional products, see complete Baldor•Maska® Product Catalog or www.baldor.com

BK² BUSHINGS STANDARD STOCK BORES (INCHES)

Part Number	Keyseat	Weight
GX3/8	None	0.4
GX7/16	None	0.4
GX1/2	1/8 X 7/16	0.4
GX9/16	1/8 X 7/16	0.4
GX5/8	3/16 X 3/32	0.3
GX11/16	3/16 X 3/32	0.3
GX3/4	3/16 X 3/32	0.3
GX13/16	3/16 X 3/32	0.3
GX7/8	3/16 X 3/32	0.3
GX15/16	1/4 X 1/8	0.2
GX1	1/4 X 1/8	0.2
LX3/8	No. K.S.	1.1
LX7/16	No. K.S.	1.1
LX1/2	1/8 X 1/16	1.0
LX9/16	1/8 X 1/16	1.0
LX5/8	3/16 X 3/32	0.9
LX11/16	3/16 X 3/32	0.9
LX3/4	3/16 X 3/32	1.0
LX13/16	3/16 X 3/32	0.9
LX7/8	3/16 X 3/32	0.9
LX15/16	1/4 X 1/8	0.8
LX1	1/4 X 1/8	0.8
LX1-1/16	1/4 X 1/8	0.7
LX1-1/8	1/4 X 1/8	0.7
LX1-3/16	1/4 X 1/8	0.7
LX1-1/4	1/4 X 1/8	0.7
LX1-5/16	5/16 X 1/16**	0.6
LX1-3/8	5/16 X 1/16**	0.6
LX1-7/16	3/8 X 1/16**	0.6
LX1-1/2	3/8 X 3/64**	0.5
P1X1/2	1/8 X 1/16	2.5
P1X9/16	1/8 X 1/16	1.8
P1X5/8	3/16 X 3/32	2.4
P1X21/32	3/16 X 3/32	1.7
P1X11/16	3/16 X 3/32	1.7
P1X3/4	3/16 X 3/32	2.3
P1X25/32	3/16 X 3/32	1.6
P1X13/16	3/16 X 3/32	1.6
P1X7/8	3/16 X 3/32	2.2
P1X15/16	1/4 X 1/8	2.1
P1X31/32	1/4 X 1/8	1.5
P1X1	1/4 X 1/8	2.1
P1X1-1/16	1/4 X 1/8	1.4
P1X1-1/8	1/4 X 1/8	2.0
P1X1-3/16	1/4 X 1/8	1.9
P1X1-1/4	1/4 X 1/8	2.0
P1X1-5/16	5/16 X 5/32	1.2
P1X1-3/8	5/16 X 5/32	1.8
P1X1-3/8KW3/8	3/8 X 3/16	1.1
P1X1-7/16	3/8 X 3/16	1.7
P1X1-1/2	3/8 X 3/16	0.9
P1X1-9/16	3/8 X 3/16	0.9
P1X1-5/8	3/8 X 3/16	0.8
P1X1-11/16	3/8 X 3/16	0.8
P1X1-3/4	3/8 X 3/16	0.7
P2X3/4	3/16 X 3/32	2.6
P2X13/16	3/16 X 3/32	2.2
P2X7/8	3/16 X 3/32	2.5
P2X15/16	1/4 X 1/8	2.0
P2X1	1/4 X 1/8	2.4
P2X1-1/16	1/4 X 1/8	1.9
P2X1-1/8	1/4 X 1/8	2.3

Part Number	Keyseat	Weight
P2X1-3/16	1/4 X 1/8	1.7
P2X1-1/4	1/4 X 1/8	2.2
P2X1-5/16	5/16 X 5/32	1.5
P2X1-3/8	5/16 X 5/32	2.1
P2X1-3/8KW3/8	3/8 X 3/16	1.4
P2X1-7/16	3/8 X 3/16	1.8
P2X1-1/2	3/8 X 3/16	1.6
P2X1-9/16	3/8 X 3/16	1.1
P2X1-5/8	3/8 X 3/16	1.5
P2X1-11/16	3/8 X 3/16	0.8
P2X1-3/4	3/8 X 3/16	1.4
BX1/2	1/8 X 7/16	3.7
BX9/16	1/8 X 7/16	3.2
BX5/8	3/16 X 3/32	3.6
BX11/16	3/16 X 3/32	3.2
BX3/4	3/16 X 3/32	3.5
BX13/16	3/16 X 3/32	3.1
BX7/8	3/16 X 3/32	3.5
BX15/16	1/4 X 1/8	3.0
BX1	1/4 X 1/8	3.4
BX1-1/16	1/4 X 1/8	2.9
BX1-1/8	1/4 X 1/8	3.3
BX1-3/16	1/4 X 1/8	2.8
BX1-1/4	1/4 X 1/8	3.2
BX1-5/16	5/16 X 5/32	2.7
BX1-3/8	5/16 X 5/32	2.6
BX1-3/8KW3/8	3/8 X 3/16	2.6
BX1-7/16	3/8 X 3/16	2.5
BX1-1/2	3/8 X 3/16	2.9
BX1-9/16	3/8 X 3/16	2.4
BX1-5/8	3/8 X 3/16	2.3
BX1-11/16	3/8 X 3/16	2.2
BX1-3/4	3/8 X 3/16	2.6
BX1-13/16	1/2 X 1/4	2.1
BX1-7/8	1/2 X 1/4	2.2
BX1-15/16	1/2 X 1/4	1.9
BX2	1/2 X 1/4	2.0
BX2-1/16	1/2 X 1/4	1.7
BX2-1/8	1/2 X 1/4	1.9
BX2-3/16	1/2 X 1/4	1.5
BX2-1/4	1/2 X 1/4	1.7
BX2-5/16	5/8 X 5/16	1.2
BX2-3/8	5/8 X 5/16	1.6
BX2-7/16	5/8 X 5/16	1.4
Q1X5/8	3/16 X 3/32	4.8
Q1X3/4	3/16 X 3/32	4.8
Q1X13/16	3/16 X 3/32	4.7
Q1X7/8	3/16 X 3/32	4.7
Q1X15/16	1/4 X 1/8	4.6
Q1X1	1/4 X 1/8	4.6
Q1X1-1/16	1/4 X 1/8	4.5
Q1X1-1/8	1/4 X 1/8	4.4
Q1X1-3/16	1/4 X 1/8	4.3
Q1X1-1/4	1/4 X 1/8	4.3
Q1X1-5/16	5/16 X 5/32	4.2
Q1X1-3/8	5/16 X 5/32	4.1
Q1X1-3/8KW3/8	3/8 X 3/16	4.1
Q1X1-7/16	3/8 X 3/16	4.0
Q1X1-1/2	3/8 X 3/16	3.9

Part Number	Keyseat	Weight
Q1X1-9/16	3/8 X 3/16	3.8
Q1X1-5/8	3/8 X 3/16	3.7
Q1X1-11/16	3/8 X 3/16	3.6
Q1X1-3/4	3/8 X 3/16	3.5
Q1X1-13/16	1/2 X 1/4	3.4
Q1X1-7/8	1/2 X 1/4	3.3
Q1X1-15/16	1/2 X 1/4	3.2
Q1X2	1/2 X 1/4	3.0
Q1X2-1/16	1/2 X 1/4	2.9
Q1X2-1/8	1/2 X 1/4	2.8
Q1X2-3/16	1/2 X 1/4	2.6
Q1X2-1/4	1/2 X 1/4	2.5
Q1X2-5/16	5/8 X 5/16	2.3
Q1X2-3/8	5/8 X 5/16	2.2
Q1X2-7/16	5/8 X 5/16	2.0
Q1X2-1/2	5/8 X 5/16	1.9
Q1X2-9/16	5/8 X 5/16	1.7
Q1X2-5/8	5/8 X 5/16	1.6
Q1X2-11/16	5/8 X 5/16	1.5
Q2X1	1/4 X 1/8	5.9
Q2X1-1/16	1/4 X 1/8	5.8
Q2X1-1/8	1/4 X 1/8	5.7
Q2X1-3/16	1/4 X 1/8	5.6
Q2X1-1/4	1/4 X 1/8	5.5
Q2X1-5/16	5/16 X 5/32	5.4
Q2X1-3/8	5/16 X 5/32	5.2
Q2X1-3/8KW3/8	3/8 X 3/16	5.2
Q2X1-7/16	3/8 X 3/16	5.1
Q2X1-1/2	3/8 X 3/16	5.0
Q2X1-9/16	3/8 X 3/16	4.9
Q2X1-5/8	3/8 X 3/16	4.7
Q2X1-11/16	3/8 X 3/16	4.6
Q2X1-3/4	3/8 X 3/16	4.4
Q2X1-13/16	1/2 X 1/4	4.3
Q2X1-7/8	1/2 X 1/4	4.1
Q2X1-15/16	1/2 X 1/4	3.9
Q2X2	1/2 X 1/4	3.7
Q2X2-1/16	1/2 X 1/4	3.6
Q2X2-1/8	1/2 X 1/4	3.4
Q2X2-3/16	1/2 X 1/4	3.2
Q2X2-1/4	1/2 X 1/4	3.0
Q2X2-5/16	5/8 X 5/16	2.8
Q2X2-3/8	5/8 X 5/16	2.6
Q2X2-7/16	5/8 X 5/16	2.3
Q2X2-1/2	5/8 X 5/16	2.1
Q2X2-9/16	5/8 X 5/16	1.9
Q2X2-5/8	5/8 X 5/16	1.7
R1X1-1/8	1/4 X 1/8	10.1
R1X1-3/16	1/4 X 1/8	10.0
R1X1-1/4	1/4 X 1/8	9.9
R1X1-5/16	5/16 X 5/32	9.8
R1X1-3/8	5/16 X 5/32	9.7
R1X1-3/8KW3/8	3/8 X 3/16	9.7
R1X1-7/16	3/8 X 3/16	9.6
R1X1-1/2	3/8 X 3/16	9.5
R1X1-9/16	3/8 X 3/16	9.4
R1X1-5/8	3/8 X 3/16	9.3
R1X1-11/16	3/8 X 3/16	9.2
R1X1-3/4	3/8 X 3/16	9.0

BK² BUSHINGS STANDARD STOCK BORES (INCHES)

Part Number	Keyseat	Weight
R1X1-13/16	1/2 X 1/4	8.9
R1X1-7/8	1/2 X 1/4	8.8
R1X1-15/16	1/2 X 1/4	8.6
R1X2	1/2 X 1/4	8.5
R1X2-1/16	1/2 X 1/4	8.3
R1X2-1/8	1/2 X 1/4	8.2
R1X2-3/16	1/2 X 1/4	8.0
R1X2-1/4	1/2 X 1/4	7.9
R1X2-5/16	5/8 X 5/16	7.7
R1X2-3/8	5/8 X 5/16	7.5
R1X2-7/16	5/8 X 5/16	7.3
R1X2-1/2	5/8 X 5/16	7.2
R1X2-9/16	5/8 X 5/16	7.0
R1X2-5/8	5/8 X 5/16	6.8
R1X2-11/16	5/8 X 5/16	6.6
R1X2-3/4	5/8 X 5/16	6.4
R1X2-13/16	3/4 X 3/8	6.2
R1X2-7/8	3/4 X 3/8	6.0
R1X2-15/16	3/4 X 3/8	4.4
R1X3	3/4 X 3/8	5.6
R1X3-1/16	3/4 X 3/8	5.3
R1X3-1/8	3/4 X 3/8	5.1
R1X3-3/16	3/4 X 3/8	4.9
R1X3-1/4	3/4 X 3/8	4.6
R1X3-3/8	7/8 X 7/16	4.2
R1X3-7/16	7/8 X 7/16	3.9
R1X3-1/2	7/8 X 7/16	3.6
R1X3-5/8	7/8 X 7/16	3.1
R1X3-11/16	7/8 X 7/16	2.9
R1X3-3/4	7/8 X 7/16	2.6
R2X1-3/8	5/16 X 5/32	14.9
R2X1-3/8KW3/8	3/8 X 3/16	14.9
R2X1-7/16	3/8 X 3/16	14.7
R2X1-1/2	3/8 X 3/16	14.5
R2X1-9/16	3/8 X 3/16	14.4
R2X1-5/8	3/8 X 3/16	14.2
R2X1-11/16	3/8 X 3/16	13.9
R2X1-3/4	3/8 X 3/16	13.7
R2X1-13/16	1/2 X 1/4	13.5
R2X1-7/8	1/2 X 1/4	13.3
R2X1-15/16	1/2 X 1/4	13.0
R2X2	1/2 X 1/4	12.8
R2X2-1/16	1/2 X 1/4	12.5
R2X2-1/8	1/2 X 1/4	12.3
R2X2-3/16	1/2 X 1/4	12.0
R2X2-1/4	1/2 X 1/4	11.7
R2X2-5/16	5/8 X 5/16	11.5
R2X2-3/8	5/8 X 5/16	11.2
R2X2-7/16	5/8 X 5/16	10.2
R2X2-1/2	5/8 X 5/16	10.6
R2X2-9/16	5/8 X 5/16	10.2
R2X2-5/8	5/8 X 5/16	9.9
R2X2-11/16	5/8 X 5/16	9.6
R2X2-3/4	5/8 X 5/16	9.4
R2X2-13/16	3/4 X 3/8	8.9
R2X2-7/8	3/4 X 3/8	8.6
R2X2-15/16	3/4 X 3/8	8.5
R2X3	3/4 X 3/8	7.8
R2X3-1/8	3/4 X 3/8	7.1
R2X3-3/16	3/4 X 3/8	6.7
R2X3-1/4	3/4 X 3/8	6.3
R2X3-3/8	7/8 X 7/16	8.0
R2X3-7/16	7/8 X 7/16	7.7
R2X3-1/2	7/8 X 7/16	7.7
R2X3-5/8	7/8 X 7/16	7.5

Part Number	Keyseat	Weight
S1X1-11/16	3/8 X 3/16	18.9
S1X1-3/4	3/8 X 3/16	18.7
S1X1-7/8	1/2 X 1/4	18.3
S1X1-15/16	1/2 X 1/4	18.1
S1X2	1/2 X 1/4	17.8
S1X2-1/8	1/2 X 1/4	17.4
S1X2-3/16	1/2 X 1/4	17.1
S1X2-1/4	1/2 X 1/4	16.9
S1X2-5/16	5/8 X 5/16	16.6
S1X2-3/8	5/8 X 5/16	16.4
S1X2-7/16	5/8 X 5/16	16.1
S1X2-1/2	5/8 X 5/16	15.8
S1X2-9/16	5/8 X 5/16	15.6
S1X2-5/8	5/8 X 5/16	15.3
S1X2-11/16	5/8 X 5/16	15.0
S1X2-3/4	5/8 X 5/16	14.7
S1X2-7/8	3/4 X 3/8	14.0
S1X2-15/16	3/4 X 3/8	13.7
S1X3	3/4 X 3/8	13.4
S1X3-1/8	3/4 X 3/8	12.7
S1X3-3/16	3/4 X 3/8	12.3
S1X3-1/4	3/4 X 3/8	12.0
S1X3-3/8	7/8 X 7/16	11.3
S1X3-7/16	7/8 X 7/16	10.9
S1X3-1/2	7/8 X 7/16	10.5
S1X3-5/8	7/8 X 7/16	9.7
S1X3-11/16	7/8 X 7/16	9.3
S1X3-3/4	7/8 X 7/16	8.9
S1X3-7/8	1 X 1/2	8.0
S1X3-15/16	1 X 1/2	7.6
S1X4	1 X 1/2	7.4
S1X4-1/8	1 X 1/2	6.2
S1X4-3/16	1 X 1/2	5.8
S1X4-1/4	1 X 1/2	5.3
S2X1-7/8	1/2 X 1/4	25.7
S2X1-15/16	1/2 X 1/4	25.4
S2X2	1/2 X 1/4	25.1
S2X2-1/8	1/2 X 1/4	24.4
S2X2-3/16	1/2 X 1/4	24.0
S2X2-1/4	1/2 X 1/4	23.6
S2X2-5/16	5/8 X 5/16	23.2
S2X2-3/8	5/8 X 5/16	22.8
S2X2-7/16	5/8 X 5/16	22.4
S2X2-1/2	5/8 X 5/16	22.0
S2X2-9/16	5/8 X 5/16	21.5
S2X2-5/8	5/8 X 5/16	21.1
S2X2-11/16	5/8 X 5/16	20.6
S2X2-3/4	5/8 X 5/16	20.2
S2X2-7/8	3/4 X 3/8	19.2
S2X2-15/16	3/4 X 3/8	17.5
S2X3	3/4 X 3/8	18.2
S2X3-1/8	3/4 X 3/8	17.1
S2X3-3/16	3/4 X 3/8	16.6
S2X3-1/4	3/4 X 3/8	16.0
S2X3-3/8	7/8 X 7/16	15.6
S2X3-7/16	7/8 X 7/16	15.0
S2X3-1/2	7/8 X 7/16	13.7
S2X3-5/8	7/8 X 7/16	12.5
S2X3-11/16	7/8 X 7/16	11.8
S2X3-3/4	7/8 X 7/16	11.2
S2X3-7/8	1 X 1/2	9.9
S2X3-15/16	1 X 1/2	14.0
S2X4	1 X 1/2	8.5
S2X4-1/8	1 X 1/2	7.1
S2X4-3/16	1 X 1/2	6.4

Part Number	Keyseat	Weight
U0X2-3/8	5/8 X 5/16	38.9
U0X2-7/16	5/8 X 5/16	38.6
U0X2-1/2	5/8 X 5/16	38.2
U0X2-9/16	5/8 X 5/16	37.9
U0X2-5/8	5/8 X 5/16	37.5
U0X2-11/16	5/8 X 5/16	37.2
U0X2-3/4	5/8 X 5/16	36.8
U0X2-7/8	3/4 X 3/8	36.1
U0X2-15/16	3/4 X 3/8	33.0
U0X3	3/4 X 3/8	35.3
U0X3-1/8	3/4 X 3/8	34.5
U0X3-3/16	3/4 X 3/8	34.0
U0X3-1/4	3/4 X 3/8	29.8
U0X3-3/8	7/8 X 7/16	29.0
U0X3-7/16	7/8 X 7/16	28.0
U0X3-1/2	7/8 X 7/16	28.1
U0X3-5/8	7/8 X 7/16	27.2
U0X3-11/16	7/8 X 7/16	26.8
U0X3-3/4	7/8 X 7/16	26.3
U0X3-7/8	1 X 1/2	25.3
U0X3-15/16	1 X 1/2	23.0
U0X4	1 X 1/2	24.3
U0X4-1/8	1 X 1/2	23.3
U0X4-3/16	1 X 1/2	22.8
U0X4-1/4	1 X 1/2	22.3
U0X4-3/8	1 X 1/2	21.2
U0X4-7/16	1 X 1/2	20.6
U0X4-1/2	1 X 1/2	21.0
U0X4-5/8	1-1/4 X 5/8	18.9
U0X4-11/16	1-1/4 X 5/8	18.3
U0X4-3/4	1-1/4 X 5/8	17.7
U0X4-7/8	1-1/4 X 5/8	16.5
U0X4-15/16	1-1/4 X 5/8	15.9
U0X5	1-1/4 X 5/8	18.5
U0X5-1/8	1-1/4 X 5/8	14.0
U0X5-3/16	1-1/4 X 5/8	13.3
U0X5-1/4	1-1/4 X 5/8	12.7
U0X5-3/8	1-1/4 X 5/8	11.3
U0X5-7/16	1-1/4 X 5/8	10.7
U0X5-1/2	1-1/4 X 5/8	10.0
U1X2-3/8	5/8 X 5/16	49.2
U1X2-7/16	5/8 X 5/16	48.8
U1X2-1/2	5/8 X 5/16	48.3
U1X2-9/16	5/8 X 5/16	47.8
U1X2-5/8	5/8 X 5/16	47.4
U1X2-11/16	5/8 X 5/16	46.9
U1X2-3/4	5/8 X 5/16	46.4
U1X2-7/8	3/4 X 3/8	45.4
U1X2-15/16	3/4 X 3/8	44.9
U1X3	3/4 X 3/8	44.3
U1X3-1/8	3/4 X 3/8	43.2
U1X3-3/16	3/4 X 3/8	42.6
U1X3-1/4	3/4 X 3/8	42.1
U1X3-3/8	7/8 X 7/16	40.0
U1X3-7/16	7/8 X 7/16	38.5
U1X3-1/2	7/8 X 7/16	39.6
U1X3-5/8	7/8 X 7/16	38.3
U1X3-11/16	7/8 X 7/16	37.6
U1X3-3/4	7/8 X 7/16	37.0
U1X3-7/8	1 X 1/2	34.3
U1X3-15/16	1 X 1/2	34.9
U1X4	1 X 1/2	34.1
U1X4-1/8	1 X 1/2	32.7
U1X4-3/16	1 X 1/2	31.9
U1X4-1/4	1 X 1/2	31.1

* Please contact Baldor for lead time and availability

BK² BUSHINGS STANDARD STOCK BORES (INCHES)

	Part Number	Keyseat	Weight
U1*	U1X4-3/8	1 X 1/2	29.6
	U1X4-7/16	1 X 1/2	28.8
	U1X4-1/2	1 X 1/2	28.0
	U1X4-5/8	1-1/4 X 5/8	26.3
	U1X4-11/16	1-1/4 X 5/8	25.5
	U1X4-3/4	1-1/4 X 5/8	24.6
	U1X4-7/8	1-1/4 X 5/8	22.8
	U1X4-15/16	1-1/4 X 5/8	22.0
	U1X5	1-1/4 X 5/8	21.0
	U1X5-1/8	1-1/4 X 5/8	19.2
	U1X5-3/16	1-1/4 X 5/8	18.3
	U1X5-1/4	1-1/4 X 5/8	17.3
	U1X5-3/8	1-1/4 X 5/8	15.4
	U1X5-7/16	1-1/4 X 5/8	14.4
	U1X5-1/2	1-1/4 X 5/8	13.4
W1*	W1X3-3/8	1-1/4 X 5/8	123.1
	W1X3-7/16	1-1/4 X 5/8	122.4
	W1X3-1/2	1-1/4 X 5/8	121.6
	W1X3-5/8	1-1/4 X 5/8	120.1
	W1X3-11/16	1-1/4 X 5/8	119.4
	W1X3-3/4	1-1/4 X 5/8	118.6
	W1X3-7/8	1 X 1/2	117.0
	W1X3-15/16	1 X 1/2	116.2
	W1X4	1 X 1/2	115.3
	W1X4-1/8	1 X 1/2	113.6
	W1X4-3/16	1 X 1/2	112.7
	W1X4-1/4	1 X 1/2	111.8
	W1X4-3/8	1 X 1/2	110.0
	W1X4-7/16	1 X 1/2	109.1
	W1X4-1/2	1 X 1/2	108.2
	W1X4-5/8	1-1/4 X 5/8	106.2
	W1X4-3/4	1-1/4 X 5/8	104.3
	W1X4-7/8	1-1/4 X 5/8	102.2
	W1X4-15/16	1-1/4 X 5/8	100.0
	W1X5	1-1/4 X 5/8	98.0
	W1X5-1/8	1-1/4 X 5/8	98.0
	W1X5-3/16	1-1/4 X 5/8	96.9
	W1X5-1/4	1-1/4 X 5/8	95.8
	W1X5-3/8	1-1/4 X 5/8	93.6
	W1X5-7/16	1-1/4 X 5/8	92.5
	W1X5-1/2	1-1/4 X 5/8	91.3
	W1X5-5/8	1-1/2 x 3/4	89.0
	W1X5-3/4	1-1/2 x 3/4	86.6
	W1X5-7/8	1-1/2 x 3/4	84.1
	W1X5-15/16	1-1/2 x 3/4	82.9
	W1X6	1-1/2 x 3/4	81.6
	W1X6-1/8	1-1/2 x 3/4	79.1
	W1X6-3/16	1-1/2 x 3/4	77.8
	W1X6-1/4	1-1/2 x 3/4	76.5
	W1X6-3/8	1-1/2 x 3/4	73.8
	W1X6-7/16	1-1/2 x 3/4	72.5
	W1X6-1/2	1-1/2 x 3/4	71.1
	W1X6-5/8	1-3/4 X 3/4	68.3
	W1X6-3/4	1-3/4 X 3/4	65.5
	W1X6-7/8	1-3/4 X 3/4	62.6
	W1X6-15/16	1-3/4 X 3/4	61.2
	W1X7	1-3/4 X 3/4	59.7
	W1X7-1/8	1-3/4 X 3/4	56.8
	W1X7-3/16	1-3/4 X 3/4	55.2
	W1X7-1/4	1-3/4 X 3/4	53.7
	W1X7-3/8	1-3/4 X 3/4	50.6
	W1X7-7/16	1-3/4 X 3/4	49.1

* Please contact Baldor for lead time and availability



Taper-Lock Bushings

Features: Available in inches & millimeter bores. Flush mounting. Sizes 1008-5050.




How to order: Example: 2012X1-3/8; 2012 = Bushing Size. The Taper-Lock bushing size is defined by 4 digits representing two numbers. The first two digits represent the maximum bore size and the second two digits represent the bushing length. For example, product number 1008 has a max. bore of 1.0" and a total length of 0.8" X 1-3/8 = Bore Size (1-3/8"). Inch bore sizes are designated with the whole inch followed by the fraction. For example, a 1.5" diameter bore would be 1-1/2. Metric bore sizes are designated with "MM" after the metric dimension (X 25MM).

1008 thru 3030 Sizes

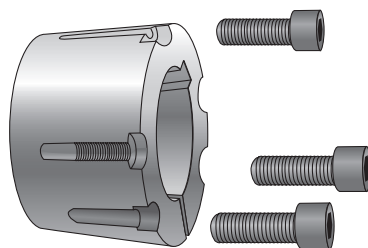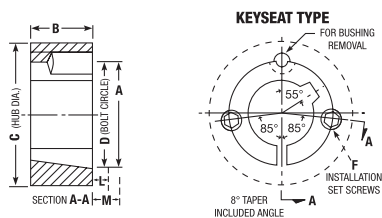

3535 thru 5050 Sizes

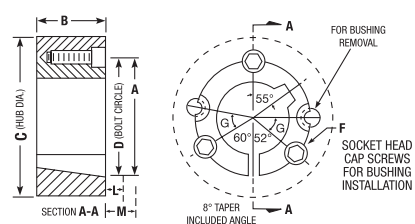

Dimensions for 1008 thru 5050

Bushing Size	List Price	Mult. Sym.	Rating • Torque Capacity (lb - in.)	Hub Diam. Ref.				Installation Screw +		G	L *		M *		Bore Range		Approx. Wt. (lbs)
				A	B	C	D	Qty	Size		Std Hex Key	Short Key €	Std Hex Key	Short Key €	Min.	Max.	
1008	11.60	TLB23	1,200	1-3/8	7/8	2-3/16	1-21/64	2	1/4 x 1/2		1-1/8	5/8	1-1/4	3/4	0.2	1	0.2
1108	12.00	TLB23	1,300	1-1/2	7/8	2-5/16	1-29/64	2	1/4 x 1/2		1-1/8	5/8	1-1/4	3/4	0.2	1-1/8	0.2
1210	12.80	TLB23	3,600	1-7/8	1	3-1/4	1-3/4	2	3/8 x 5/8		1-3/8	13/16	1-5/8	1-1/16	0.5	1-1/4	0.5
1215	14.00	TLB23	3,550	1-7/8	1-1/2	2-7/8	1-3/4	2	3/8 x 5/8		1-3/8	13/16	1-5/8	1-1/16	0.3	1-1/4	0.3
1310	14.40	TLB23	3,850	2	1	3-3/8	1-7/8	2	3/8 x 5/8		1-3/8	13/16	1-5/8	1-1/16	0.6	1-7/16	0.6
1610	14.80	TLB23	4,300	2-1/4	1	3-5/8	2-1/8	2	3/8 x 5/8		1-3/8	13/16	1-5/8	1-1/16	0.7	1-11/16	0.7
1615	15.40	TLB23	4,300	2-1/4	1-1/2	3-1/4	2-1/8	2	3/8 x 5/8		1-3/8	1-3/16	1-5/8	1-11/16	1.0	1-11/16	1.0
2012	20.00	TLB23	7,150	2-3/4	1-1/4	4-3/8	2-5/8	2	7/16 x 7/8		1-9/16	15/16	2	1-3/8	1.4	2-1/8	1.4
2517	24.60	TLB23	11,600	3-3/8	1-3/4	4-7/8	3-1/4	2	1/2 x 1		1-5/8	1	2-1/4	1-5/8	3.1	2-11/16	3.1
2525	36.40	TLB23	11,300	3-3/8	2-1/2	4-1/2	3-1/4	2	1/2 x 1		1-5/8	1	2-1/4	1-5/8	3.5	2-1/2	3.5
3020	37.00	TLB23	24,000	4-1/4	2	6-1/4	4	2	5/8 x 1-1/4		1-13/16	1-3/16	2-11/16	2-1/16	5.0	3-1/4	5.0
3030	54.00	TLB23	24,000	4-1/4	3	5-3/4	4	2	5/8 x 1-1/4		1-13/16	1-3/16	2-11/16	2-1/16	7.4	3-1/4	7.4
3535	76.00	TLB23	44,800	5	3-1/2	7	4-27/32	3	1/2 x 1-1/2	39	2	1-5/16	3-3/8	2-11/16	9.8	3-15/16	9.8
4040	122.00	TLB23	77,300	5-3/4	4	8-1/2	5-35/64	3	5/8 x 1-3/4	40	2-3/8	1-5/8	4-1/8	3-3/8	15.4	4-7/16	15.4
4545	152.00	TLB23	110,000	6-3/8	4-1/2	9-1/2	6-1/8	3	3/4 x 2	40	2-5/8	1-15/16	4-3/4	4-1/16	21.0	4-15/16	21.0
5050	246.00	TLB23	126,000	7	5	10-1/2	6-23/32	3	7/8 x 2-1/4	37	2-13/16	2-5/16	5-1/4	4-13/16	29.0	5	29.0

+ Use in position shown in drawing above for tightening bushing on shaft. When loosening bushing, remove screws and use all except one in the other holes.

* Space required to remove bushing using jackscrews - no puller required.

€ Standard hex key cut to minimum useable length.

• Peak torque loads must not exceed torque capacity rating shown. Capacity values are for light starting and steady running conditions. For more severe duty, divide torque capacity by service factor referred to in Baldor•Maska® Product Catalog.

Note: Approx. weight in lbs. for an average size bore.

Light Duty Fixed Bore: MA, 2MA



Features: All products have 2 set screws and this definite advantage results in a tighter grip of the mounted product on the shaft for improved performance. Bore range 1/2" to 1-7/16". 1 & 2 grooves, A & 3L-4L belts.

Note: DO NOT use these gray cast iron sheaves with rim speeds in excess of 6500 feet per minute.

How to order: Example: 2MA65X1-1/8; 2 = 2 grooves, MA = Mask A belt, 65 = O.D. 6.5", X 1-1/8 = Bore size (1-1/8"). Inch bore sizes are designated with the whole inch followed by the fraction. For example, a 1.5" diameter bore would be 1-1/2".

MA (A & 3L-4L V-BELTS)

1 GROOVE


Part Number	Cross Ref.	List Price	Mult. Sym.	D.D. (3L) Belts	D.D. A (4L) Belts	O.D.	T	L	Standard Bores	Max. Bore	Approx. Wt. (lbs)
MA15*	-	8.00	LDS04	-	1.30	1.55	1B	1-1/4	1/2 · 5/8	5/8	0.4
MA18*	AK17	8.32	LDS04	-	1.50	1.75	1B	1-3/8	1/2 · 5/8 · 3/4	3/4	0.4
MA20	AK20	8.32	LDS04	1.41	1.75	2.00	1B	1-3/8	1/2 · 5/8 · 3/4 · 7/8	7/8	0.7
MA21	AK21	8.68	LDS04	1.51	1.85	2.10	1B	1-3/8	1/2 · 5/8 · 3/4 · 7/8	7/8	0.7
MA22	AK22	8.68	LDS04	1.61	1.95	2.20	1B	1-3/8	1/2 · 5/8 · 3/4 · 7/8	7/8	0.8
MA23	AK23	9.24	LDS04	1.71	2.05	2.30	1B	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 1	1	0.8
MA24	-	9.42	LDS04	1.76	2.10	2.35	1B	1-3/8	1/2 · 5/8 · 3/4 · 7/8	7/8	0.8
MA25	AK25	9.60	LDS04	1.91	2.25	2.50	2B	1-1/4	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	0.9
MA26	AK26	9.76	LDS04	2.01	2.35	2.60	2B	1-1/4	1/2 · 5/8 · 3/4 · 7/8 · 1	1-1/8	0.9
MA27	AK27	10.04	LDS04	2.11	2.45	2.70	2B	1-1/4	1/2 · 5/8 · 3/4 · 7/8 · 1	1-1/8	0.9
MA28	AK28	11.00	LDS04	2.21	2.55	2.80	2B	1-1/4	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	0.9
MA30	AK30	11.88	LDS04	2.46	2.80	3.05	2B	1-1/4	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	1.2
MA33	AK32	12.24	LDS04	2.66	3.00	3.25	2B	1-1/4	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	1.5
MA35	AK34	13.32	LDS04	2.86	3.20	3.45	2B	1-1/4	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 28MM	1-1/8	1.4
MA38	AK39	16.60	LDS04	3.16	3.50	3.75	2W	1-1/8	1/2 · 5/8 · 3/4 · 7/8 · 15/16 · 1 · 1-1/8	1-1/8	1.5
MA40	AK41	19.16	LDS04	3.36	3.70	3.95	2W	1-1/8	1/2 · 5/8 · 3/4 · 7/8 · 15/16 · 1 · 1-1/8	1-3/16	2.0
MA43	AK44	19.72	LDS04	3.66	4.00	4.25	2W	1-1/8	1/2 · 5/8 · 3/4 · 7/8 · 15/16 · 1 · 1-1/8	1-3/16	2.0
MA45	AK46	20.56	LDS04	3.86	4.20	4.45	2W	1-1/8	1/2 · 5/8 · 3/4 · 7/8 · 15/16 · 1 · 1-1/8	1-3/16	2.0
MA48	AK49	20.76	LDS04	4.16	4.50	4.75	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 15/16 · 1 · 1-1/8	1-3/16	2.0
MA50	AK51	21.92	LDS04	4.36	4.70	4.95	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16	1-3/16	2.0
MA53	AK54	22.32	LDS04	4.66	5.00	5.25	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 15/16 · 1 · 1-1/8 · 1-3/16	1-3/16	2.5
MA55	AK56	23.96	LDS04	4.86	5.20	5.45	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 15/16 · 1 · 1-1/8 · 1-3/16	1-3/16	2.5
MA58	AK59	25.36	LDS04	5.16	5.50	5.75	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 15/16 · 1 · 1-1/8 · 1-3/16	1-3/16	2.5
MA60	AK61	25.56	LDS04	5.36	5.70	5.95	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 15/16 · 1 · 1-1/8 · 1-3/16	1-3/16	3.0
MA63	AK64	26.24	LDS04	5.66	6.00	6.25	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 15/16 · 1 · 1-1/8 · 1-3/16	1-1/4	3.0
MA65	AK66	27.28	LDS04	5.86	6.20	6.45	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/4	3.0
MA68	AK69	29.68	LDS04	6.16	6.50	6.75	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16	1-1/4	3.0
MA70	AK71	30.92	LDS04	6.36	6.70	6.95	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-7/16	3.5
MA73	AK74	31.04	LDS04	6.66	7.00	7.25	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 15/16 · 1 · 1-1/8 · 1-3/16 · 1-1/4 · 1-7/16	1-7/16	3.5
MA78	AK79	35.48	LDS04	7.16	7.50	7.75	1A	1-3/8	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-7/16	1-7/16	3.5
MA80	-	35.48	LDS04	7.41	7.75	8.00	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-1/4 · 1-7/16	1-7/16	3.5
MA83	AK84	37.96	LDS04	7.66	8.00	8.25	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 15/16 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-7/16	4.4
MA88	AK89	41.32	LDS04	8.16	8.50	8.75	1A	1-3/8	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-7/16	1-7/16	4.5
MA90	-	41.32	LDS04	8.41	8.75	9.00	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-7/16	4.5
MA93	AK94	42.20	LDS04	8.66	9.00	9.25	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 15/16 · 1 · 1-1/8 · 1-3/16 · 1-1/4 · 1-7/16	1-7/16	5.4
MA98	AK99	44.20	LDS04	9.16	9.50	9.75	1A	1-3/8	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-7/16	1-7/16	5.5
MA100	-	44.20	LDS04	9.41	9.75	10.00	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-7/16	5.5
MA103	AK104	45.04	LDS04	9.66	10.00	10.25	1A	1-3/8	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-1/4 · 1-3/8 · 1-7/16	1-7/16	6.0
MA108	AK109	48.28	LDS04	10.16	10.50	10.75	1A	1-3/8	3/4 · 7/8 · 1 · 1-1/8 · 1-3/8 · 1-7/16	1-7/16	6.0
MA110	-	48.28	LDS04	10.41	10.75	11.00	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-7/16	1-5/8	6.5
MA113	AK114	50.72	LDS04	10.66	11.00	11.25	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-7/16	6.5
MA120	-	56.60	LDS04	11.41	11.75	12.00	1A	1-3/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-7/16	7.5
MA123	AK124	56.60	LDS04	11.66	12.00	12.25	1A	1-3/8	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-1/4 · 1-7/16	1-7/16	7.0
MA133	AK134	67.96	LDS04	12.66	13.00	13.25	1A	1-3/8	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-3/8 · 1-7/16	1-3/4	8.5
MA143	AK144	75.40	LDS04	13.66	14.00	14.25	1A	1-3/8	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-3/4	9.0
MA153	AK154	85.00	LDS04	14.66	15.00	15.25	1A	1-3/8	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-3/8 · 1-7/16	1-3/4	9.0
MA183	AK184	107.56	LDS04	17.66	18.00	18.25	1A	1-3/8	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-7/8	14.0

P.D. for "A" (4L) Belts = O.D.


P.D. for "3L" Belts = D.D.+0.25 = O.D.-0.34

* DO NOT use 3L belts with MA15 and MA18 sheaves.

Type of sheave "T": A = arms; B = block; W = web



TYPE 1




TYPE 2

2MA (A V-BELTS) 2 GROOVES


Part Number	Cross Reference	List Price	Mult. Sym.	D.D. A Belts	O.D.	T	L	Standard Bores	Max. Bore	Approx. Wt. (lbs)
2MA20	2AK20	20.64	LDS04	1.75	2.00	3B	2-1/16	1/2 · 5/8 · 3/4	3/4	1.0
2MA22	2AK21	20.64	LDS04	1.90	2.15	3B	2-1/16	1/2 · 5/8 · 3/4	7/8	1.0
2MA23	2AK22	22.72	LDS04	2.00	2.25	3B	2-1/16	1/2 · 5/8 · 3/4 · 7/8 · 1	1	1.0
2MA24	2AK23	22.72	LDS04	2.10	2.35	4B	1-7/8	1/2 · 5/8 · 3/4 · 7/8 · 1	1-1/8	1.0
2MA25	2AK25	22.88	LDS04	2.30	2.55	4B	1-11/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	1.5
2MA27	2AK26	25.12	LDS04	2.40	2.65	4B	1-7/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	1.5
2MA28	2AK27	27.68	LDS04	2.50	2.75	4B	1-11/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	1.5
2MA29	2AK28	27.68	LDS04	2.60	2.85	4B	1-11/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	1.5
2MA30	2AK30	30.72	LDS04	2.80	3.05	4B	1-11/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	2.0
2MA33	2AK32	34.56	LDS04	3.00	3.25	4B	1-5/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	2.0
2MA35	2AK34	35.68	LDS04	3.20	3.45	4B	1-5/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	2.5
2MA38	2AK39	36.32	LDS04	3.50	3.75	4B	1-5/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-3/16	3.0
2MA40	2AK41	40.36	LDS04	3.70	3.95	4W	1-9/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-3/16	3.0
2MA43	2AK44	41.60	LDS04	4.00	4.25	4W	1-9/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-3/16	3.0
2MA45	2AK46	43.32	LDS04	4.20	4.45	4W	1-11/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-3/16	4.0
2MA48	2AK49	44.40	LDS04	4.50	4.75	4W	1-9/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8	1-3/8	3.5
2MA50	2AK51	45.44	LDS04	4.70	4.95	4W	1-9/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8	1-3/16	4.0
2MA53	2AK54	45.92	LDS04	5.00	5.25	4W	1-9/16	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8	1-3/8	4.0
2MA55	2AK56	46.72	LDS04	5.20	5.45	4W	1-9/16	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8	1-3/8	5.0
2MA58	2AK59	50.52	LDS04	5.50	5.75	4W	1-9/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-3/8	1-3/8	5.0
2MA60	2AK61	52.08	LDS04	5.70	5.95	4W	1-11/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8	1-3/8	6.0
2MA63	2AK64	54.48	LDS04	6.00	6.25	4A	1-9/16	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-3/8 · 1-7/16	1-11/16	5.5
2MA70	·	60.96	LDS04	6.75	7.00	4A	1-9/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-7/16	1-11/16	6.0
2MA73	2AK74	61.96	LDS04	7.00	7.25	4A	1-9/16	3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-3/8 · 1-7/16	1-11/16	6.0
2MA80	·	66.88	LDS04	7.75	8.00	4A	1-9/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-7/16	1-11/16	7.0
2MA83	2AK84	67.88	LDS04	8.00	8.25	4A	1-9/16	3/4 · 7/8 · 15/16 · 1 · 1-1/8 · 1-3/16 · 1-3/8 · 1-7/16	1-7/16	8.0
2MA90	·	72.80	LDS04	8.75	9.00	4A	1-9/16	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-7/16	1-7/16	8.5
2MA93	2AK94	73.80	LDS04	9.00	9.25	4A	1-9/16	3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-3/8 · 1-7/16	1-11/16	9.0
2MA100	·	78.72	LDS04	9.75	10.00	4A	1-9/16	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-7/16	1-11/16	9.0
2MA103	2AK104	79.32	LDS04	10.00	10.25	4A	1-9/16	3/4 · 7/8 · 15/16 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-11/16	10.0
2MA110	·	85.08	LDS04	10.75	11.00	4A	1-9/16	3/4 · 7/8 · 1 · 1-1/8 · 1-7/16	1-11/16	10.0
2MA113	2AK114	86.08	LDS04	11.00	11.25	4A	1-9/16	3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-3/8 · 1-7/16	1-11/16	11.0
2MA120	·	94.28	LDS04	11.75	12.00	4A	1-9/16	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-7/16	1-11/16	11.0
2MA123	2AK124	94.28	LDS04	12.00	12.25	4A	1-19/32	3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-11/16	12.0
2MA133	2AK134	111.04	LDS04	13.00	13.25	4A	1-19/32	5/8 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-11/16	14.0
2MA143	2AK144	117.24	LDS04	14.00	14.25	4A	1-9/16	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-11/16	15.0
2MA153	2AK154	135.28	LDS04	15.00	15.25	4A	1-9/16	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-15/16	17.0
2MA183	2AK184	170.48	LDS04	18.00	18.25	4A	1-17/32	5/8 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-7/16	1-7/16	19.0

P.D. for "A" Belts = O.D.

Type of sheave "T": A = arms; B = block; W = web



TYPE 3



TYPE 4

Bore Range	Keyseat
1/2"	None
5/8" - 7/8"	3/16" X 3/32"
15/16" - 1 1/4"	1/4" X 1/8"
1 5/16" - 1 3/8"	5/16" X 5/32"
1 7/16" - 1 3/4"	3/8" X 3/16"

Light Duty Fixed Bore: MB, 2MB




Features: All products have 2 set screws and this definite advantage results in a tighter grip of the mounted product on the shaft for improved performance. Bore range 1/2" to 1-7/16". 1 & 2 grooves, A-B & 4L-5L belts.

Note: DO NOT use these gray cast iron sheaves with rim speeds in excess of 6500 feet per minute.


How to order: Example: 2MB65X1-1/8; 2 = 2 grooves, MB = Maska B belt, 65 = O.D. 6.5", X 1-1/8 = Bore size (1-1/8"). Inch bore sizes are designated with the whole inch followed by the fraction. For example, a 1.5" diameter bore would be 1-1/2.

MB (A, B, 4L & 5L V-BELTS) 1 GROOVE

Part Number	Cross Ref.	List Price	Mult. Sym.	D.D. A (4L) Belts	D.D. B (5L) Belts	O.D.	T	L	Standard Bores	Max. Bore	Approx. Wt. (lbs)
MB20	-	11.25	LDS04	*1.25	1.65	2.00	5B	1-1/2	1/2" · 5/8" · 3/4"	3/4	0.5
MB23	-	11.64	LDS04	*1.50	1.90	2.25	6B	1-11/32	1/2" · 5/8" · 3/4" · 7/8" · 1"	1	1.0
MB24	BK24	11.64	LDS04	1.65	2.05	2.40	6B	1-1/2	1/2" · 5/8" · 3/4" · 7/8"	1	1.0
MB25	BK25	12.00	LDS04	*1.75	2.15	2.50	5B	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8"	1-1/8	1.0
MB26	BK26	12.68	LDS04	1.85	2.25	2.60	5B	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1"	1-1/8	1.0
MB28	BK27	13.20	LDS04	1.95	2.35	2.70	6B	1-3/8	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8"	1-1/8	1.0
MB30	BK28	13.20	LDS04	2.20	2.60	2.95	6B	1-3/8	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8"	1-1/8	1.0
MB31	BK30	13.56	LDS04	2.40	2.80	3.15	6B	1-3/8	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8"	1-1/8	1.0
MB33	-	14.72	LDS04	2.50	2.90	3.25	6B	1-3/8	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 28MM	1-1/8	1.0
MB34	BK32	14.72	LDS04	2.60	3.00	3.35	6B	1-3/8	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8"	1-1/8	1.0
MB35	BK34	18.08	LDS04	2.80	3.20	3.55	6B	1-3/8	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8"	1-1/8	1.5
MB38	BK36	19.72	LDS04	3.00	3.40	3.75	6B	1-1/4	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16"	1-1/8	1.5
MB40	BK40	20.56	LDS04	3.20	3.60	3.95	6B	1-1/4	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 28MM	1-3/16	2.0
MB43	BK45	21.04	LDS04	3.50	3.90	4.25	6W	1-1/4	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8"	1-3/16	2.0
MB45	BK47	22.72	LDS04	3.70	4.10	4.45	6W	1-1/4	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8"	1-3/16	2.0
MB48	BK50	23.04	LDS04	4.00	4.40	4.75	5W	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 15/16" · 1" · 1-1/8"	1-1/4	2.5
MB50	BK52	23.12	LDS04	4.20	4.60	4.95	5W	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16" · 25MM	1-1/4	2.5
MB53	BK55	24.48	LDS04	4.50	4.90	5.25	6W	1-5/16	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16"	1-3/16	3.0
MB55	BK57	25.56	LDS04	4.70	5.10	5.45	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 15/16" · 1" · 1-1/8" · 1-3/16" · 1-1/4"	1-1/4	2.5
MB58	BK60	26.24	LDS04	5.00	5.40	5.75	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16"	1-3/16	2.5
MB60	BK62	26.44	LDS04	5.20	5.60	5.95	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 15/16" · 1" · 1-1/8" · 1-3/16" · 25MM	1-1/2	2.5
MB63	BK65	29.64	LDS04	5.50	5.90	6.25	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16" · 20MM · 25MM · 35MM	1-5/16	3.0
MB65	BK67	30.76	LDS04	5.70	6.10	6.45	5A	1-1/2	5/8" · 3/4" · 7/8" · 1" · 1-1/8"	1-1/4	3.0
MB68	BK70	34.24	LDS04	6.00	6.40	6.75	5A	1-1/2	5/8" · 3/4" · 7/8" · 15/16" · 1" · 1-1/8" · 1-3/16" · 1-7/16"	1-7/16	4.0
MB70	BK72	36.36	LDS04	6.20	6.60	6.95	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16" · 1-7/16"	1-1/4	3.5
MB73	BK75	37.08	LDS04	6.50	6.90	7.25	5A	1-1/2	1/2" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16" · 1-3/8" · 20MM · 25MM · 35MM	1-3/8	3.5
MB75	BK77	37.40	LDS04	6.70	7.10	7.45	5A	1-1/2	5/8" · 3/4" · 1" · 1-1/8" · 1-3/8"	1-1/2	4.0
MB78	BK80	37.96	LDS04	7.00	7.40	7.75	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16" · 1-1/4" · 1-3/8" · 1-7/16" · 25MM · 35MM · 28MM	1-7/16	4.0
MB80	-	40.26	LDS04	7.25	7.65	8.00	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16" · 1-7/16"	1-7/16	4.0
MB83	BK85	42.76	LDS04	7.50	7.90	8.25	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/8" · 1-7/16" · 25MM · 35MM	1-7/16	4.5
MB88	BK90	44.00	LDS04	8.00	8.40	8.75	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 15/16" · 1" · 1-1/8" · 1-3/8" · 1-3/16" · 1-7/16"	1-7/16	5.0
MB90	-	44.88	LDS04	8.25	8.65	9.00	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-7/16"	1-7/16	5.0
MB93	BK95	47.00	LDS04	8.50	8.90	9.25	5A	1-1/2	1/2" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/8" · 1-7/16" · 25MM · 35MM	1-7/16	5.5
MB98	BK100	48.60	LDS04	9.00	9.40	9.75	5A	1-1/2	1/2" · 3/4" · 7/8" · 15/16" · 1" · 1-1/8" · 1-3/16" · 1-1/4" · 1-3/8" · 1-7/16"	1-7/16	6.0
MB100	-	48.60	LDS04	9.25	9.65	10.00	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16" · 1-3/8" · 1-7/16"	1-7/16	6.0
MB103	BK105	53.20	LDS04	9.50	9.90	10.25	5A	1-1/2	1/2" · 7/8" · 1" · 1-1/8" · 1-3/8" · 1-7/16" · 25MM · 35MM	1-5/8	6.5
MB108	BK110	55.88	LDS04	10.00	10.40	10.75	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16" · 1-3/8" · 1-7/16" · 25MM · 35MM	1-7/16	7.0
MB110	-	55.88	LDS04	10.25	10.65	11.00	5A	1-1/2	5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-7/16"	1-5/8	7.0
MB113	BK115	57.28	LDS04	10.50	10.90	11.25	5A	1-1/2	1/2" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/8" · 1-7/16"	1-5/8	8.0
MB118	BK120	59.68	LDS04	11.00	11.40	11.75	5A	1-1/2	5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16" · 1-1/4" · 1-3/8" · 1-7/16"	1-5/8	8.0
MB120	-	57.68	LDS04	11.25	11.65	12.00	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16" · 1-7/16" · 25MM · 35MM	1-5/8	8.0
MB128	BK130	66.72	LDS04	12.00	12.40	12.75	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16" · 1-7/16"	1-5/8	9.0
MB138	BK140	80.12	LDS04	13.00	13.40	13.75	5A	1-1/2	5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16" · 1-7/16"	1-5/8	10.0
MB158	BK160	104.20	LDS04	15.00	15.40	15.75	5A	1-1/2	1" · 1-1/8" · 1-3/16" · 1-1/4" · 1-7/16"	1-5/8	12.0
MB188	BK190	120.00	LDS04	18.00	18.40	18.75	5A	1-1/2	1/2" · 5/8" · 3/4" · 7/8" · 1" · 1-1/8" · 1-3/16" · 1-1/4" · 1-7/16"	1-5/8	14.0



TYPE 5



TYPE 6

P.D. for "A" (4L) Belts = Datum Dia. + 0.35" = O.D. - 0.40"

P.D. for "B" (5L) Belts = O.D.


* DO NOT use "A" or "4L" belts with these specific bores.

Type of sheave "T": A = arms; B = block; W = web


2MB (A & B V-BELTS)

2 GROOVES

Part Number	Cross Ref.	List Price	Mult. Sym.	D.D. A Belts	D.D. B Belts	O.D.	T	L	Standard Bores	Max. Bore	Approx. Wt. (lbs)
2MB20	-	25.42	LDS04	*1.35	1.75	2.00	7B	2-1/8	*1/2 · *5/8 · *3/4 · *7/8	7/8	1.0
2MB23	-	27.22	LDS04	*1.60	2.00	2.25	8B	2-5/16	1/2 · 5/8 · 3/4 · *7/8	7/8	1.0
2MB25	2BK25	29.12	LDS04	*1.90	2.30	2.50	7B	2-5/16	1/2 · 5/8 · 3/4 · 7/8 · *1 · *1-1/8	1-1/8	1.5
2MB28	2BK27	30.08	LDS04	2.10	2.50	2.70	8B	1-15/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	1.5
2MB30	2BK28	32.36	LDS04	2.20	2.60	2.95	8B	1-15/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8	1-1/8	2.0
2MB32	2BK30	34.44	LDS04	2.40	2.80	3.15	8B	1-7/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	2.0
2MB33	-	36.00	LDS04	2.50	2.90	3.25	8B	1-7/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	2.0
2MB34	2BK32	36.00	LDS04	2.60	3.00	3.35	8B	1-15/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	3.0
2MB35	2BK34	37.56	LDS04	2.80	3.20	3.55	8B	1-7/8	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/8	2.5
2MB38	2BK36	38.60	LDS04	3.00	3.40	3.75	8B	1-7/8	1/2 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8	1-3/8	3.0
2MB40	2BK40	40.36	LDS04	3.20	3.60	3.95	8B	1-11/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-1/4	1-3/16	3.0
2MB43	2BK45	43.48	LDS04	3.50	3.90	4.25	8W	1-13/16	1/2 · 1 · 1-1/8 · 1-3/8	1-3/8	4.0
2MB45	2BK47	43.48	LDS04	3.70	4.10	4.45	8W	1-13/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/4	4.0
2MB48	2BK50	46.64	LDS04	4.00	4.40	4.75	8W	1-13/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/4	4.0
2MB50	2BK52	47.88	LDS04	4.20	4.60	4.95	8W	1-11/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	1-1/4	4.5
2MB53	2BK55	50.36	LDS04	4.50	4.90	5.25	8W	1-13/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8	1-3/8	5.0
2MB55	2BK57	51.88	LDS04	4.70	5.10	5.45	8W	1-13/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8	1-3/8	5.0
2MB58	2BK60	54.12	LDS04	5.00	5.40	5.75	8W	1-13/16	1/2 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8	1-3/8	5.0
2MB60	2BK62	55.16	LDS04	5.20	5.60	5.95	8W	1-13/16	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8 · 30MM	1-3/8	6.0
2MB63	2BK65	58.56	LDS04	5.50	5.90	6.25	8A	1-13/16	1/2 · 3/4 · 1 · 1-1/8 · 1-3/8	1-11/16	6.0
2MB65	2BK67	61.88	LDS04	5.70	6.10	6.45	8A	1-11/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8 · 40MM	1-11/16	6.0
2MB68	2BK70	68.68	LDS04	6.00	6.40	6.75	8A	1-13/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-3/8 · 1-7/16 · 30MM · 35MM · 38MM · 40MM	1-11/16	6.0
2MB70	-	68.68	LDS04	6.25	6.65	7.00	8A	1-13/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-7/16	1-11/16	6.0
2MB78	2BK80	72.92	LDS04	7.00	7.40	7.75	8A	1-13/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-1/4 · 1-3/8 · 1-7/16 · 35MM · 40MM	1-11/16	7.0
2MB80	-	72.92	LDS04	7.25	7.65	8.00	8A	1-13/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8 · 1-7/16	1-11/16	8.0
2MB88	2BK90	75.40	LDS04	8.00	8.40	8.75	8A	1-13/16	3/4 · 1 · 1-1/8 · 1-3/16 · 1-1/4 · 1-3/8 · 1-7/16	1-11/16	8.0
2MB90	-	75.40	LDS04	8.25	8.65	9.00	8A	1-11/16	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-7/16 · 35MM · 40MM	1-11/16	9.0
2MB98	2BK100	88.68	LDS04	9.00	9.40	9.75	8A	1-13/16	3/4 · 1 · 1-1/8 · 1-3/16 · 1-3/8 · 1-7/16	1-11/16	10.0
2MB100	-	88.68	LDS04	9.25	9.65	10.00	8A	1-13/16	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-7/16	1-11/16	10.0
2MB108	2BK110	94.20	LDS04	10.00	10.40	10.75	8A	1-13/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-1/4 · 1-7/16 · 35MM · 40MM	1-11/16	13.0
2MB110	-	94.20	LDS04	10.25	10.65	11.00	8A	1-13/16	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-7/16	1-11/16	13.0
2MB118	2BK120	102.00	LDS04	11.00	11.40	11.75	8A	1-13/16	1 · 1-3/16 · 1-1/4 · 1-7/16	1-11/16	10.0
2MB120	-	102.00	LDS04	11.25	11.65	12.00	8A	1-11/16	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-1/4 · 1-7/16 · 35MM ·	1-11/16	15.0
2MB128	2BK130	114.60	LDS04	12.00	12.40	12.75	8A	1-13/16	1/2 · 1 · 1-3/16 · 1-7/16	1-7/8	15.0
2MB138	2BK140	120.28	LDS04	13.00	13.40	13.75	8A	1-13/16	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/16 · 1-1/4 · 1-7/16 · 35MM · 40MM	1-7/8	17.0
2MB158	2BK160	143.24	LDS04	15.00	15.40	15.75	8A	1-13/16	1/2 · 1 · 1-3/16 · 1-3/8 · 1-7/16	1-7/8	18.0
2MB188	2BK190	183.76	LDS04	18.00	18.40	18.75	8A	1-13/16	1-1/8 · 1-3/16 · 1-7/16	1-7/8	26.0



TYPE 7



TYPE 8

P.D. for "A" Belts = Datum Dia. + 0.35" = O.D. - 0.40"

Type of sheave "T": A = arms; B = block; W = web

P.D. for "B" Belts = O.D.

* DO NOT use "A" belts with these specific bores

Bore Range	Keyseat
1/2"	None
5/8" - 7/8"	3/16" X 3/32"
15/16" - 1 1/4"	1/4" X 1/8"
1 5/16" - 1 3/8"	5/16" X 5/32"
1 7/16" - 1 3/4"	3/8" X 3/16"

Light Duty Bush Type: MAL, 2MAL



Features: Can handle up to 20 HP @ 1750 RPM. Bore range 1/2" to 1-1/2".
1 & 2 grooves, A & 3L-4L belts.

Note: DO NOT use these gray cast iron sheaves with rim speeds in excess of 6500 feet per minute.

MAL (A & 3L-4L V-BELTS)

This entire product series uses the "L" Bushing

1 GROOVE

Part Number	Cross Ref.	List Price	Mult. Sym.	D.D. (3L) Belts	D.D. A (4L) Belts	O.D.	Type	Dimensions*				Approx. Wt. (lbs)
								E	F	L	M	
MAL30	AK30H	19.06	LDS13	2.46	2.8	3.05	1B	3/8	3/4	1-11/32	31/32	1.15
MAL32	AK32H	19.36	LDS13	2.66	3.0	3.25	1B	3/8	3/4	1-11/32	31/32	1.30
MAL34	AK34H	19.64	LDS13	2.86	3.2	3.45	1B	3/32	3/4	1-11/32	11/16	1.20
MAL37	AK39H	20.78	LDS13	3.16	3.5	3.75	1B	3/32	3/4	1-11/32	11/16	1.50
MAL39	AK41H	21.06	LDS13	3.36	3.7	3.95	1B	3/32	3/4	1-11/32	11/16	1.75
MAL42	AK44H	21.34	LDS13	3.66	4.0	4.25	1B	3/32	3/4	1-11/32	11/16	2.05
MAL44	AK46H	21.62	LDS13	3.86	4.2	4.45	1B	3/32	3/4	1-11/32	11/16	2.25
MAL47	AK49H	21.92	LDS13	4.16	4.5	4.75	3W	3/32	3/4	1-11/32	11/16	2.10
MAL49	AK51H	22.20	LDS13	4.36	4.7	4.95	3W	3/32	3/4	1-11/32	11/16	2.35
MAL52	AK54H	22.48	LDS13	4.66	5.0	5.25	3W	3/32	3/4	1-11/32	11/16	2.65
MAL54	AK56H	22.80	LDS13	4.86	5.2	5.45	3W	3/32	3/4	1-11/32	11/16	2.75
MAL57	AK59H	23.24	LDS13	5.16	5.5	5.75	5A	3/32	3/4	1-11/32	11/16	2.60
MAL59	AK61H	23.72	LDS13	5.36	5.7	5.95	5A	3/32	3/4	1-11/32	11/16	2.50
MAL62	AK64H	24.32	LDS13	5.66	6.0	6.25	5A	3/32	3/4	1-11/32	11/16	2.60
MAL64	AK66H	25.08	LDS13	5.86	6.2	6.45	5A	3/32	3/4	1-11/32	11/16	2.70
MAL67	AK69H	27.48	LDS13	6.16	6.5	6.75	5A	3/32	3/4	1-11/32	11/16	2.85
MAL69	AK71H	28.96	LDS13	6.36	6.7	6.95	5A	3/32	3/4	1-11/32	11/16	2.90
MAL72	AK74H	30.36	LDS13	6.66	7.0	7.25	5A	3/32	3/4	1-11/32	11/16	3.10
MAL77	AK79H	33.08	LDS13	7.16	7.5	7.75	5A	3/32	3/4	1-11/32	11/16	3.35
MAL82	AK84H	35.20	LDS13	7.66	8.0	8.25	5A	1/8	3/4	1-11/32	23/32	3.85
MAL87	AK89H	37.92	LDS13	8.16	8.5	8.75	5A	3/32	3/4	1-11/32	11/16	4.10
MAL92	AK94H	40.96	LDS13	8.66	9.0	9.25	5A	3/32	3/4	1-11/32	11/16	4.40
MAL97	AK99H	43.52	LDS13	9.16	9.5	9.75	5A	3/32	3/4	1-11/32	11/16	4.60
MAL102	AK104H	44.12	LDS13	9.66	10.0	10.25	5A	3/32	3/4	1-11/32	11/16	4.90
MAL107	AK109H	46.36	LDS13	10.16	10.5	10.75	5A	3/32	3/4	1-11/32	11/16	5.20
MAL112	AK114H	47.84	LDS13	10.66	11.0	11.25	5A	3/32	3/4	1-11/32	11/32	5.55
MAL122	AK124H	52.28	LDS13	11.66	12.0	12.25	5A	3/32	3/4	1-11/32	11/16	5.90
MAL132	AK134H	60.28	LDS13	12.66	13.0	13.25	5A	3/32	3/4	1-11/32	11/16	6.55
MAL142	AK144H	67.72	LDS13	13.66	14.0	14.25	5A	3/32	3/4	1-11/32	11/16	7.30
MAL152	AK154H	74.52	LDS13	14.66	15.0	15.25	5A	3/32	3/4	1-11/32	11/16	9.80
MAL182	AK184H	88.00	LDS13	17.66	18.0	18.25	5A	3/32	3/4	1-11/32	11/16	9.95

P.D. for "A" (4L) Belts = O.D.


P.D. for "3L" Belts = D.D.+0.25 = O.D.-0.34

* Dimensions to closest fraction.


Legend: "E" and "M" dimensions may vary according to shaft tolerance.

With "L" bushing only reverse mounting is possible.


Type of sheave "T": A = arms; B = block; W = web



TYPE 1



TYPE 3



TYPE 5

2MAL (A V-BELTS)

This entire product series uses the "L" Bushing

2 GROOVES

Part Number	Cross Ref.	List Price	Mult. Sym.	D.D. "A" Belts	O.D.	Type	Dimensions*				Approx. Wt. (lbs)
							E	F	L	M	
2MAL30	2AK30H	33.36	LDS13	2.8	3.05	2B	1	1-3/8	1-11/32	31/32	1.70
2MAL32	2AK32H	37.48	LDS13	3.0	3.25	2B	1	1-3/8	1-11/32	31/32	1.90
2MAL34	2AK34H	37.76	LDS13	3.2	3.45	2B	23/32	1-3/8	1-11/32	11/16	1.90
2MAL37	2AK39H	38.56	LDS13	3.5	3.75	2B	23/32	1-3/8	1-11/32	11/16	2.15
2MAL39	2AK41H	42.68	LDS13	3.7	3.95	4B	3/32	1-3/8	1-11/32	1/16	2.30
2MAL42	2AK44H	44.16	LDS13	4.0	4.25	4B	3/32	1-3/8	1-11/32	1/16	2.75
2MAL44	2AK46H	46.24	LDS13	4.2	4.45	4W	3/32	1-3/8	1-11/32	1/16	2.85
2MAL47	2AK49H	47.12	LDS13	4.5	4.75	4W	3/32	1-3/8	1-11/32	1/16	3.50
2MAL49	2AK51H	48.44	LDS13	4.7	4.95	4W	3/32	1-3/8	1-11/32	1/16	3.70
2MAL52	2AK54H	50.52	LDS13	5.0	5.25	4W	3/32	1-3/8	1-11/32	1/16	4.05
2MAL54	2AK56H	51.24	LDS13	5.2	5.45	4W	3/32	1-3/8	1-11/32	1/16	4.20
2MAL57	2AK59H	51.68	LDS13	5.5	5.75	6A	3/32	1-3/8	1-11/32	1/16	3.90
2MAL59	2AK61H	52.88	LDS13	5.7	5.95	6A	3/32	1-3/8	1-11/32	1/16	4.05
2MAL62	2AK64H	55.76	LDS13	6.0	6.25	6A	3/32	1-3/8	1-11/32	1/16	4.50
2MAL72	2AK74H	62.36	LDS13	7.0	7.25	6A	3/32	1-3/8	1-11/32	1/16	5.70
2MAL82	2AK84H	69.20	LDS13	8.0	8.25	6A	3/32	1-3/8	1-11/32	1/16	6.50
2MAL92	2AK94H	74.36	LDS13	9.0	9.25	6A	3/32	1-3/8	1-11/32	1/16	7.80
2MAL102	2AK104H	77.92	LDS13	10.0	10.25	6A	3/32	1-3/8	1-11/32	1/16	8.80
2MAL112	2AK114H	86.68	LDS13	11.0	11.25	6A	3/32	1-3/8	1-11/32	1/16	9.50
2MAL122	2AK124H	91.40	LDS13	12.0	12.25	6A	3/32	1-3/8	1-11/32	1/16	10.60
2MAL132	2AK134H	96.76	LDS13	13.0	13.25	6A	3/32	1-3/8	1-11/32	1/16	11.90
2MAL142	2AK144H	102.36	LDS13	14.0	14.25	6A	3/32	1-3/8	1-11/32	1/16	12.45
2MAL152	2AK154H	114.68	LDS13	15.0	15.25	6A	3/32	1-3/8	1-11/32	1/16	14.00
2MAL182	2AK184H	151.12	LDS13	18.0	18.25	6A	3/32	1-3/8	1-11/32	1/16	17.95


P.D. for "A" Belts = O.D.

* Dimensions to closest fraction.


Legend: "E" and "M" dimensions may vary according to shaft tolerance.

With "L" bushing only reverse mounting is possible.


Type of sheave "T": A = arms; B = block; W = web



TYPE 2



TYPE 4



TYPE 6

Light Duty Bush Type: MBL, 2MBL



Features: Can handle up to 20 HP @ 1750 RPM. Bore range 1/2" to 1-1/2".
1 & 2 grooves, A-B & 4L-5L belts.

Note: DO NOT use these gray cast iron sheaves with rim speeds in excess of 6500 feet per minute.

MBL (A-B & 4L-5L V-BELTS)

This entire product series uses the "L" Bushing

1 GROOVE

Part Number	Cross Ref.	List Price	Mult. Sym.	D.D. A(4L) Belts	D.D. B(5L) Belts	O.D.	Type	Dimensions*				Approx. Wt. (lbs)
								E	F	L	M	
MBL31	BK30H	21.68	LDS13	2.40	2.80	3.15	1B	17/32	29/32	1-11/32	63/64	1.25
MBL33	BK32H	23.06	LDS13	2.60	3.00	3.35	1B	17/32	29/32	1-11/32	63/64	1.40
MBL35	BK34H	23.10	LDS13	2.80	3.20	3.55	1B	17/32	29/32	1-11/32	63/64	1.65
MBL37	BK36H	23.28	LDS13	3.00	3.40	3.75	3B	3/32	29/32	1-11/32	17/32	1.40
MBL39	BK40H	23.34	LDS13	3.20	3.60	3.95	3B	3/32	29/32	1-11/32	17/32	1.70
MBL42	BK45H	23.84	LDS13	3.50	3.90	4.25	3B	3/32	29/32	1-11/32	17/32	2.05
MBL44	BK47H	24.36	LDS13	3.70	4.10	4.45	3B	3/32	29/32	1-11/32	17/32	2.35
MBL47	BK50H	24.92	LDS13	4.00	4.40	4.75	3W	3/32	29/32	1-11/32	17/32	1.95
MBL49	BK52H	25.44	LDS13	4.20	4.60	4.95	3W	3/32	29/32	1-11/32	17/32	2.40
MBL52	BK55H	25.96	LDS13	4.50	4.90	5.25	3W	3/32	29/32	1-11/32	17/32	2.35
MBL54	BK57H	26.46	LDS13	4.70	5.10	5.45	3W	3/32	29/32	1-11/32	17/32	2.90
MBL57	BK60H	26.76	LDS13	5.00	5.40	5.75	5W	3/32	29/32	1-11/32	17/32	2.45
MBL59	BK62H	28.20	LDS13	5.20	5.60	5.95	5W	3/32	29/32	1-11/32	17/32	2.80
MBL62	BK65H	30.08	LDS13	5.50	5.90	6.25	5W	3/32	29/32	1-11/32	17/32	2.70
MBL64	BK67H	30.96	LDS13	5.70	6.10	6.45	5W	3/32	29/32	1-11/32	17/32	2.80
MBL67	BK70H	32.04	LDS13	6.00	6.40	6.75	5A	3/32	29/32	1-11/32	17/32	3.00
MBL69	BK72H	33.52	LDS13	6.20	6.60	6.95	5A	3/32	29/32	1-11/32	17/32	3.60
MBL72	BK75H	34.92	LDS13	6.50	6.90	7.25	5A	3/32	29/32	1-11/32	17/32	3.45
MBL74	BK77H	35.36	LDS13	6.70	7.10	7.45	5A	3/32	29/32	1-11/32	17/32	3.65
MBL77	BK80H	35.96	LDS13	7.00	7.40	7.75	5A	3/32	29/32	1-11/32	17/32	3.80
MBL82	BK85H	39.92	LDS13	7.50	7.90	8.25	5A	3/32	29/32	1-11/32	17/32	4.55
MBL87	BK90H	42.48	LDS13	8.00	8.40	8.75	5A	3/32	29/32	1-11/32	17/32	5.10
MBL92	BK95H	45.68	LDS13	8.50	8.90	9.25	5A	3/32	29/32	1-11/32	17/32	5.30
MBL97	BK100H	47.44	LDS13	9.00	9.40	9.75	5A	3/32	29/32	1-11/32	17/32	5.80
MBL102	BK105H	48.36	LDS13	9.50	9.90	10.25	5A	3/32	29/32	1-11/32	17/32	5.50
MBL107	BK110H	52.16	LDS13	10.00	10.40	10.75	5A	3/32	29/32	1-11/32	17/32	5.85
MBL112	BK115H	53.80	LDS13	10.50	10.90	11.25	5A	3/32	29/32	1-11/32	17/32	7.20
MBL117	BK120H	57.72	LDS13	11.00	11.40	11.75	5A	3/32	29/32	1-11/32	17/32	6.59
MBL127	BK130H	63.16	LDS13	12.00	12.40	12.75	5A	3/32	29/32	1-11/32	17/32	7.90
MBL137	BK140H	71.64	LDS13	13.00	13.40	13.75	5A	3/32	29/32	1-11/32	17/32	10.15
MBL147	BK150H	77.80	LDS13	14.00	14.40	14.75	5A	3/32	29/32	1-11/32	17/32	13.25
MBL157	BK160H	83.72	LDS13	15.00	15.40	15.75	5A	3/32	29/32	1-11/32	17/32	16.05
MBL187	BK190H	114.52	LDS13	18.00	18.40	18.75	5A	3/32	29/32	1-11/32	17/32	12.45

P.D. for "A" (4L) Belts = Datum.Dia. + 0.35" = O.D. - 0.40"


P.D. for "B" (5L) Belts = O.D.

* Dimensions to closest fraction.


Legend: "E" and "M" dimensions may vary according to shaft tolerance.

With "L" bushing only reverse mounting is possible.


Type of sheave "T": A = arms; B = block; W = web



TYPE 1



TYPE 3



TYPE 5

2MBL (A-B V-BELTS)

This entire product series uses the "L" Bushing

2 GROOVES

Part Number	Cross Ref.	List Price	Mult. Sym.	D.D. "A" Belts	D.D. "B" Belts	O.D.	Type	Dimensions*				Approx. Wt. (lbs)
								E	F	L	M	
2MBL33	2BK32H	39.56	LDS13	2.60	3.00	3.35	2B	1-3/8	1-3/4	1-11/32	31/32	2.35
2MBL35	2BK34H	39.84	LDS13	2.80	3.20	3.55	2B	1-3/8	1-3/4	1-11/32	31/32	2.55
2MBL37	2BK36H	40.64	LDS13	3.00	3.40	3.75	2B	1-3/8	1-3/4	1-11/32	31/32	3.00
2MBL39	2BK40H	41.04	LDS13	3.20	3.60	3.95	2B	15/16	1-3/4	1-11/32	17/32	2.80
2MBL42	2BK45H	42.08	LDS13	3.50	3.90	4.25	2B	15/16	1-3/4	1-11/32	17/32	3.25
2MBL44	2BK47H	46.36	LDS13	3.70	4.10	4.45	2B	15/16	1-3/4	1-11/32	17/32	3.35
2MBL47	2BK50H	47.24	LDS13	4.00	4.40	4.75	4W	3/32	1-3/4	1-11/32	5/16	3.85
2MBL49	2BK52H	48.44	LDS13	4.20	4.60	4.95	4W	3/32	1-3/4	1-11/32	5/16	4.00
2MBL52	2BK55H	52.44	LDS13	4.50	4.90	5.25	4W	3/32	1-3/4	1-11/32	5/16	4.40
2MBL54	2BK57H	53.32	LDS13	4.70	5.10	5.45	4W	3/32	1-3/4	1-11/32	5/16	4.95
2MBL57	2BK60H	54.52	LDS13	5.00	5.40	5.75	4W	3/32	1-3/4	1-11/32	5/16	5.30
2MBL59	2BK62H	55.24	LDS13	5.20	5.60	5.95	4W	3/32	1-3/4	1-11/32	5/16	5.80
2MBL62	2BK65H	59.56	LDS13	5.50	5.90	6.25	6A	1/16	1-3/4	1-11/32	11/32	5.40
2MBL64	2BK67H	60.60	LDS13	5.70	6.10	6.45	6A	1/16	1-3/4	1-11/32	11/32	5.85
2MBL67	2BK70H	62.24	LDS13	6.00	6.40	6.75	6A	1/16	1-3/4	1-11/32	11/32	5.55
2MBL69	-	64.60	LDS13	6.20	6.60	6.95	6A	1/16	1-3/4	1-11/32	11/32	6.65
2MBL77	2BK80H	72.28	LDS13	7.00	7.40	7.75	6A	1/16	1-3/4	1-11/32	11/32	6.85
2MBL87	2BK90H	73.64	LDS13	8.00	8.40	8.75	6A	1/16	1-3/4	1-11/32	11/32	9.65
2MBL97	2BK100H	85.48	LDS13	9.00	9.40	9.75	6A	1/16	1-3/4	1-11/32	11/32	9.20
2MBL107	2BK110H	92.60	LDS13	10.00	10.40	10.75	6A	1/16	1-3/4	1-11/32	11/32	12.80
2MBL117	2BK120H	105.76	LDS13	11.00	11.40	11.75	6A	1/16	1-3/4	1-11/32	11/32	14.65
2MBL127	2BK130H	113.64	LDS13	12.00	12.40	12.75	6A	1/16	1-3/4	1-11/32	11/32	14.15
2MBL137	2BK140H	128.60	LDS13	13.00	13.40	13.75	6A	1/16	1-3/4	1-11/32	11/32	14.95
2MBL157	2BK160H	134.92	LDS13	15.00	15.40	15.75	6A	1/16	1-3/4	1-11/32	11/32	18.70
2MBL187	2BK190H	151.40	LDS13	18.00	18.40	18.75	6A	1/16	1-3/4	1-11/32	11/32	24.20

P.D. for "A" Belts = Datum.Dia. + 0.35" = O.D. - 0.40"


P.D. for "B" Belts = O.D.

* Dimensions to closest fraction


Legend: "E" and "M" dimensions may vary according to shaft tolerance.

With "L" bushing only reverse mounting is possible.


Type of sheave "T": A = arms; B = block; W = web



TYPE 2



TYPE 4



TYPE 6

Fractional Horsepower Series (F.H.P.): MFAL (Fixed bore A & 4L V-belt series)



Features: Stock items include one set screw with standard keyseat.

Note: DO NOT use these gray cast iron sheaves with rim speeds in excess of 6500 feet per minute.


How to order: Example: MFAL104X3/4; M = Maska light duty family
FAL = Fractional horsepower series. 104 = Outside diameter (10") (Refer to the dimensions table for exact value). X 3/4 = Bore size (3/4").

Dimensions

Part Number	List Price	Mult. Sym.	Diameter		Stock Bores			Dimensions				Approx. Wt. (Lbs)
			Outside	D.D. A (4L)	5/8"	3/4"	1"	F	L	P	C	
MFAL54	14.88	LDS19	4.93	4.78	x	x	x	19/32	1-1/16	15/32	-	1.1
MFAL64	15.56	LDS19	5.93	5.78	x	x	x	19/32	1-1/16	15/32	-	1.5
MFAL74	17.76	LDS19	6.93	6.78	x	x	x	19/32	1-1/16	15/32	-	1.75
MFAL84	20.24	LDS19	7.93	7.78	x	x	x	19/32	1-1/16	15/32	-	2.2
MFAL94	25.56	LDS19	8.93	8.78	-	x	x	19/32	1-1/16	15/32	-	3.0
MFAL104	28.20	LDS19	9.93	9.78	-	x	x	19/32	1-1/16	15/32	-	2.7
MFAL114	31.20	LDS19	10.93	10.78	-	x	x	19/32	1-1/16	15/32	-	3.1
MFAL124	37.40	LDS19	11.93	11.78	-	x	x	19/32	1-1/16	15/32	-	3.5
MFAM144	61.20	LDS19	14.16	14.00	-	-	x	11/16	1-3/32	13/32	1/32	5.2

Pitch Dia. for "A" (4L) belts = Datum Dia. +.26" = O.D. +.11"

Bore Range	Keyseat
1/2"	None
5/8" - 7/8"	3/16" X 3/32"
15/16" - 1 1/4"	1/4" X 1/8"

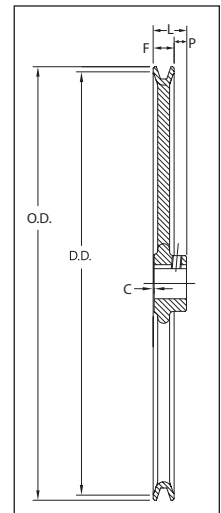

Adjustable Pitch Light Duty (HVAC) MVL



Features: Designed for applications up to 5HP. Bore range 1/2" to 7/8". Designed to be used with the MFAL Series.

Note: DO NOT use these gray cast iron sheaves with rim speeds in excess of 6500 feet per minute.


How to order: Example: MVL30X5/8;
MVL: Maska variable light duty pitch sheave, 30: Approximate outside diameter 2.87", X 5/8: Bore size (5/8"). Inch bore sizes are designated with the whole inch followed by the fraction. For example, a 1.5" diameter bore would be 1-1/2.

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Dimensions						Stock Bores Marked "X"				Approx. Wt. (Lbs)
				F		G		L	K					
				Max.	Min.	Max.	Min.			1/2	5/8	3/4	7/8	
MVL25	11.70	VPS16	2.50	27/32	19/32	5/8	3/8	1 1/2	37/64	X	X	-	-	0.8
MVL30	12.20	VPS16	2.87	27/32	19/32	5/8	3/8	1 1/2	37/64	X	X	-	-	1.0
MVL34	12.20	VPS16	3.15	1-5/64	23/32	7/8	1/2	1-11/16	37/64	X	X	X	-	1.1
MVL40	15.00	VPS16	3.75	1-3/32	45/64	7/8	1/2	1-11/16	37/64	X	X	X	X	1.5
MVL44	19.00	VPS16	4.15	1-3/32	45/64	7/8	1/2	1-11/16	37/64	X	X	X	X	1.75
1VM50	30.00	VPS16	4.75	1-1/16	11/16	7/8	1/2	1 7/8	21/32	X	X	X	X	2.8

Pitch Dia. for "A" (4L) belts = Datum Dia. +.26" = O.D. +.11"

Bore Range	Keyseat
1/2"	None
5/8" - 7/8"	3/16" X 3/32"

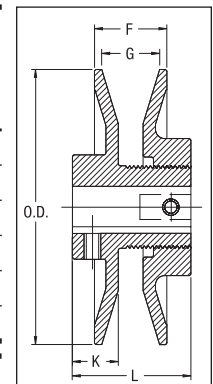

8000 SERIES



Features: Stock Sizes - 1 and 2 grooves up to 25 HP. Both 1 and 2 groove adjustable sheaves permit variations of as much as 30% in speed when used with a fixed diameter sheave. Available in metric bores. Larger sizes come with 2 set screws. Other special bores are available, call for delivery terms.


Note: DO NOT use these gray cast iron sheaves with rim speeds in excess of 6500 feet per minute.

How to order: Example: 8600X1-3/8; 8600: Variable pitch sheave size. The first digit stands for 8000 series. Last three digits represent the approximate outside diameter (6.00). X 1-3/8: Bore size (1-3/8"). Metric bore sizes are designated with "MM" after the metric dimension (X 25MM). Inch bore sizes are designated with the whole inch followed by the fraction. For example, a 1.5" diameter bore would be 1-1/2.

1 GROOVE

Dimensions


Part Number	List Price	Mult. Sym.	O.D.	L1	F		G		Available Stock Bores	Approx. Wt. (lbs)
					Max.	Min.	Max.	Min.		
8325	33.80	VPS12	3.25	1-3/4	1-1/32	21/32	3/4	3/8	*1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 9mm · 14mm · 19mm	2.0
8350	41.60	VPS12	3.75	1-3/4	1-5/32	25/32	7/8	1/2	*1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 9mm · 14mm · 19mm · 24mm · 28mm	2.0
8400	42.70	VPS12	4.15	1-3/4	1-5/32	25/32	7/8	1/2	*1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 12.7mm · 14mm · 19mm · 24mm · 28mm	2.5
8450 ¹	43.20	VPS12	4.75	1-3/4	1-5/32	25/32	7/8	1/2	*1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 12.7mm · 14mm · 19mm · 24mm · 28mm	3.1
8550 ²	67.80	VPS12	5.35	1-3/4	1-9/32	25/32	1	1/2	*1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8 · 1-5/8 12.7mm · 14mm · 19mm · 24mm · 28mm · 38mm	4.5
8600 ²	105.40	VPS12	6.00	1-3/4	1-9/32	25/32	1	1/2	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8 · 1-5/8 12.7mm · 19mm · 24mm · 28mm · 38mm · 42mm	5.0
8670 ²	106.80	VPS12	6.70	1-3/4	1-9/32	25/32	1	1/2	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-3/8 · 1-5/8 12.7mm · 19mm · 24mm · 28mm · 38mm · 42mm	6.0
8740 ²	153.40	VPS12	7.40	1-3/4	1-9/32	25/32	1	1/2	3/4 · 7/8 · 1 · 1-1/8 · 1-3/8 · 1-5/8 24mm · 28mm · 38mm · 42mm	7.0

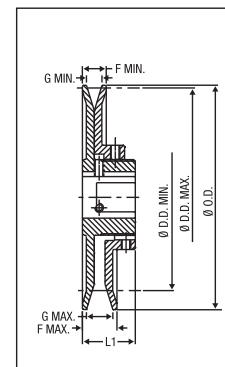

2 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	L2	F		G		Available Stock Bores	Approx. Wt. (lbs)
					Max.	Min.	Max.	Min.		
D8325	81.00	VPS12	3.25	3-1/4	1-15/16	1-3/16	3/4	3/8	5/8 · 3/4 · 7/8 · 1 · 1-1/8 24mm · 28mm	3.5
D8350	93.20	VPS12	3.75	3-3/8	2-3/16	1-7/16	7/8	1/2	5/8 · 3/4 · 7/8 · 1 · 1-1/8 28mm	4.2
D8400	100.30	VPS12	4.15	3-3/8	2-3/16	1-7/16	7/8	1/2	5/8 · 3/4 · 7/8 · 1 · 1-1/8 24mm · 28mm	4.8
D8450 ¹	105.80	VPS12	4.75	3-3/8	2-3/16	1-7/16	7/8	1/2	5/8 · 3/4 · 7/8 · 1 · 1-1/8 12.7mm · 24mm · 28mm	6.0
D8550 ²	123.60	VPS12	5.35	3-3/8	2-7/16	1-7/16	1	1/2	3/4 · 7/8 · 1 · 1-1/8 · 1-3/8 · 1-5/8 12.7mm · 19mm · 24mm · 28mm · 38mm · 42mm	9.0
D8600 ²	167.20	VPS12	6.00	3-3/8	2-7/16	1-7/16	1	1/2	3/4 · 7/8 · 1 · 1-1/8 · 1-3/8 · 1-5/8 12.7mm · 24mm · 28mm · 38mm · 42mm	10.8
D8670 ²	176.80	VPS12	6.70	3-3/8	2-7/16	1-7/16	1	1/2	3/4 · 7/8 · 1 · 1-1/8 · 1-3/8 · 1-5/8 12.7mm · 24mm · 28mm · 38mm · 42mm	12.8
D8740 ²	272.60	VPS12	7.40	3-3/8	2-7/16	1-7/16	1	1/2	3/4 · 7/8 · 1 · 1-1/8 · 1-3/8 · 1-5/8 24mm · 28mm · 38mm · 42mm	14.8

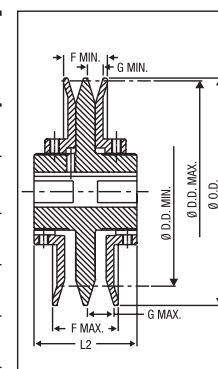

* Supplied without keyway

¹ Comes with two set screws at 120 degrees

² Comes with two set screws at 120 degrees and an "H" Key

U.S. Patent N° 450 4249 - Can. Patent N° 1160478

VP SERIES




Features: Maska 1VP and 2VP Series are finished bore variable speed sheaves made of cast iron and designed for heavier duty service up to 25HP. Available in single and double grooves, they offer a pitch range from 1.9" to 6.7" (A belt) and 2.4" to 7.0" (B belt). Type 2 model has positive locked-on settings.

Note: DO NOT use these gray cast iron sheaves with rim speeds in excess of 6500 feet per minute.

How to order: Example: 1VP71X3/4; 1: Number of grooves. VP = Variable pitch sheave, 71 = the approximate outside diameter (7.1"), X 3/4: Bore size (3/4"). Inch bore sizes are designated with the whole inch followed by the fraction. For example, a 1.5" diameter bore would be 1-1/2.

1VP & 2VP SERIES

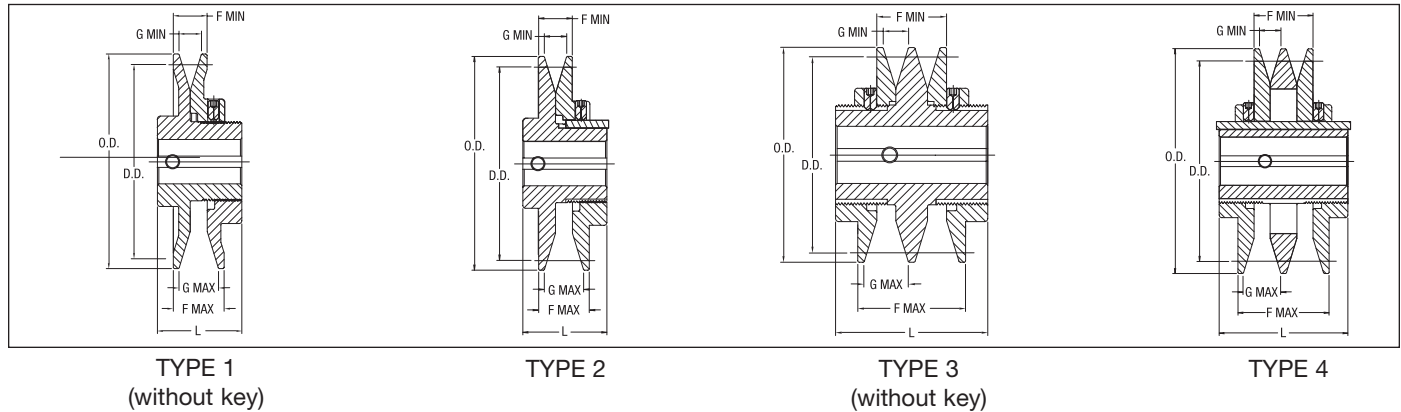

Dimensions

Part Number	List Price	Mult. Sym.	Type	O.D.	L	F		G		Available Stock Bores	Approx. Wt. (lbs)
						Max.	Min.	Max.	Min.		
1VP25	36.96	VPS30	1	2.50	1-1/2	13/16	9/16	5/8	3/8	*1/2	7
1VP30	37.52	VPS30	1	2.87	1-21/32	13/16	9/16	5/8	3/8	*1/2 · 5/8 · 3/4	1.1
1VP34	47.20	VPS30	1	3.15	1-7/8	1	11/16	13/16	1/2	*1/2 · 5/8 · 3/4 · 7/8	1.4
1VP40	47.80	VPS30	1	3.75	1-7/8	1-1/16	11/16	7/8	1/2	*1/2 · 5/8 · 3/4 · 7/8	1.9
1VP44	51.60	VPS30	1	4.15	1-7/8	1-1/16	11/16	7/8	1/2	*1/2 · 5/8 · 3/4	2.4
1VP44	71.60	VPS30	2	4.15	1-7/8	1-1/8	3/4	7/8	1/2	7/8 · 1 · 1 1/8	2.9
1VP50	60.80	VPS30	1	4.75	2	1-1/16	11/16	7/8	1/2	*1/2 · 5/8 · 3/4	2.9
1VP50	87.00	VPS30	2	4.75	1-7/8	1-1/8	3/4	7/8	1/2	7/8 · 1 · 1-1/8	3.6
1VP56	90.80	VPS30	1	5.35	1-7/8	1-1/16	11/16	7/8	1/2	*1/2 · 5/8 · 3/4	3.8
1VP56	117.20	VPS30	2	5.35	1-7/8	1-1/8	3/4	7/8	1/2	7/8 · 1 · 1-1/8	4.4
1VP60	142.00	VPS30	2	6.00	1-21/32	1-1/4	7/8	1-1/32	21/32	3/4 · 7/8 · 1-1/8 · 1-3/8	6.5
1VP62	143.30	VPS30	2	5.95	1-29/32	1-1/8	3/4	7/8	1/2	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-1/4 · 1-3/8	6.1
1VP65	148.60	VPS30	2	6.50	1-21/32	1-1/4	7/8	1-1/32	21/32	3/4 · 7/8 · 1-1/8 · 1-3/8 · 1-5/8	6.8
1VP68	149.20	VPS30	2	6.55	1-29/32	1-1/8	3/4	7/8	1/2	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-1/4 · 1-3/8	7.3
1VP71	158.40	VPS30	2	7.10	1-21/32	1-1/4	7/8	1-1/32	21/32	3/4 · 7/8 · 1-1/8 · 1-3/8 · 1-5/8	8.2
1VP75	211.40	VPS30	2	7.50	1-21/32	1-1/4	7/8	1-1/32	21/32	3/4 · 7/8 · 1-1/8 · 1-3/8	9.2
2VP36	113.60	VPS30	3	3.35	3	2	1-3/8	13/16	1/2	*1/2 · 5/8 · 3/4 · 7/8 · 1	3.4
2VP42	130.20	VPS30	3	3.95	3	2-1/8	1-3/8	7/8	1/2	5/8 · 3/4 · 7/8 · 1 · 1-1/8	4.4
2VP50	150.00	VPS30	4	4.75	3	2-1/8	1-3/8	7/8	1/2	5/8 · 3/4 · 7/8 · 1 · 1-1/8	6.3
2VP56	176.60	VPS30	4	5.35	3	2-1/8	1-3/8	7/8	1/2	5/8 · 3/4 · 7/8 · 1 · 1-1/8	7.8
2VP60	225.60	VPS30	4	6.00	3-1/4	2-3/8	1-5/8	1-1/32	21/32	3/4 · 7/8 · 1-1/8 · 1-3/8 · 1-5/8	10.6
2VP62	225.80	VPS30	4	5.95	3	2-1/8	1-3/8	7/8	1/2	3/4 · 7/8 · 1 · 1-1/8 · 1-1/4 · 1-3/8	10.0
2VP65	242.00	VPS30	4	6.50	3-1/4	2-3/8	1-5/8	1-1/32	21/32	3/4 · 7/8 · 1-1/8 · 1-3/8 · 1-5/8	12.3
2VP68	249.80	VPS30	4	6.55	3	2-1/8	1-3/8	7/8	1/2	7/8 · 1 · 1-1/8 · 1-1/4 · 1-3/8 · 1-5/8 · 1-7/8	11.7
2VP71	256.00	VPS30	4	7.10	3-1/4	2-3/8	1-5/8	1-1/32	21/32	3/4 · 7/8 · 1-1/8 · 1-3/8 · 1-5/8 · 1-7/8 · 50MM	14.6
2VP75	379.20	VPS30	4	7.50	3-1/4	2-3/8	1-5/8	1-1/32	21/32	3/4 · 7/8 · 1-1/8 · 1-3/8 · 1-5/8 · 1-7/8	16.5

Pitch Dia. for "A" (4L) belts = Datum Dia. +.26" = O.D. +.11"

* Supplied without keyway

MVS




Features: Designed for up to 40 HP @ 1750 RPM. Used with A, B, 3V & 5V belts

Note: DO NOT use these gray cast iron sheaves with rim speeds in excess of 6500 feet per minute.

How to order: Example: MVS150X1-3/8; MVS = Maska variable speed sheave, Last three digits represent the outside diameter in MM. 150 MM = 5.905". X 1-3/8: Bore size (1-3/8"). Inch bore sizes are designated with the whole inch followed by the fraction. For example, a 1.5" diameter bore would be 1-1/2".

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Dimensions						Stock Bores Marked “X”					Approx. Wt. (lbs)
				F		E		L	H	1-1/8	1-3/8	1-5/8	1-7/8	2-1/8	
				Min.	Max.	Min.	Max.								
MVS130	228.00	VPS17	5.118	1.73	2.27	0.75	1.02	3.77	3.15	X	X	-	-	-	8.5
MVS150	250.00	VPS17	5.905	1.73	2.59	0.77	1.20	4.13	3.62	X	X	X	-	-	12.1
MVS170	272.00	VPS17	6.692	1.73	2.59	0.77	1.20	4.13	3.62	X	X	X	-	-	14.8
MVS190	294.00	VPS17	7.480	1.73	2.59	0.77	1.20	4.13	5.12	-	X	X	X	-	23.2
MVS210	316.00	VPS17	8.268	1.73	2.59	0.77	1.20	4.13	5.12	-	X	X	X	X	27.0
MVS230	338.00	VPS17	9.055	1.73	2.59	0.77	1.20	4.13	5.12	-	X	X	X	X	30.40

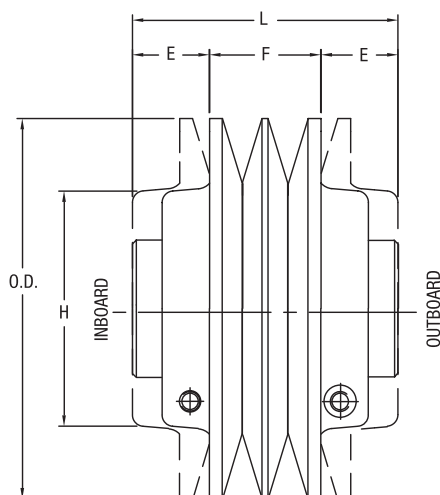

Pulley Adjustment

Modify the sheave pitch diameter by using the adjustment screw. Every turn of the adjustment screw moves the flanges by 1/16". Once the required diameter is obtained, tighten the locking screw.

VERSA-V Sheaves (Split taper)



Features: Used with conventional A, B and 5V belts. Available in 1 to 4 grooves. B Bushing used with the majority of the Versa-V Sheaves, bores 1/2 to 2-7/16. Popular in HVAC, wood processing industry, bulk material handling and package material handling.


Note: The type of sheave construction is indicated in the column entitled Type. The number refers to the drawing and the letter as follows:

A = arms; B = block; W = web.


How to order: Example: 2VV54; 2 = Number of grooves. VV = Versa-V (split taper type sheaves), 54 = Datum diameter for B belts (5.4")

1 Groove

Part Number	Cross. ref.	List Price	Diameters				F = 1 inch					Approx. Wt. (lbs.)
			Outside	Datum A Belts	Datum B Belts	Pitch 5V Belts	H	Type	B	L	E	
1VV42	1B5V42	26.47	4.48	3.8	4.2	4.5	5/8	1B	P1	1-15/16	5/16	2.5
1VV44	1B5V44	27.27	4.68	4	4.4	4.5	5/8	1B	P1	1-15/16	5/16	2.8
1VV46	1B5V46	30.11	4.88	4.2	4.6	4.7	3/4	1B	B	1-15/16	3/16	2.5
1VV48	1B5V48	30.93	5.08	4.4	4.8	4.9	3/4	1B	B	1-15/16	3/16	2.9
1VV50	1B5V50	31.75	5.28	4.6	5	5.1	3/4	1B	B	1-15/16	3/16	3.3
1VV52	1B5V52	32.56	5.48	4.8	5.2	5.3	3/4	1B	B	1-15/16	3/16	3.7
1VV54	1B5V54	33.38	5.68	5	5.4	5.5	3/4	1B	B	1-15/16	3/16	4.1
1VV56	1B5V56	34.20	5.88	5.2	5.6	5.7	3/4	1B	B	1-15/16	3/16	4.5
1VV58	1B5V58	35.02	6.08	5.4	5.8	5.9	3/4	1B	B	1-15/16	3/16	5
1VV60	1B5V60	36.65	6.28	5.6	6	6.1	3/4	1B	B	1-15/16	3/16	5.4
1VV62	1B5V62	38.29	6.48	5.8	6.2	6.3	3/4	1W	B	1-15/16	3/16	5.3
1VV64	1B5V64	39.92	6.68	6	6.4	6.5	3/4	1W	B	1-15/16	3/16	5.6
1VV66	1B5V66	43.20	6.88	6.2	6.6	6.7	3/4	1W	B	1-15/16	3/16	6
1VV68	1B5V68	44.83	7.08	6.4	6.8	6.9	3/4	1W	B	1-15/16	3/16	6.4
1VV70	1B5V70	46.47	7.28	6.6	7	7.1	3/4	1W	B	1-15/16	3/16	6.8
1VV74	1B5V74	49.74	7.68	7	7.4	7.5	3/4	1W	B	1-15/16	3/16	7.7
1VV80	1B5V80	51.37	8.28	7.6	8	8.1	7/8	2A	B	1-15/16	3/16	7.5
1VV86	1B5V86	54.65	8.88	8.2	8.6	8.7	7/8	2A	B	1-15/16	3/16	7.9
1VV90	1B5V90	55.44	9.28	8.6	9	9.1	7/8	2A	B	1-15/16	3/16	8.2
1VV94	1B5V94	56.28	9.68	9	9.4	9.5	7/8	2A	B	1-15/16	3/16	8.5
1VV110	1B5V110	66.10	11.28	10.6	11	11.1	7/8	2A	B	1-15/16	3/16	10.3
1VV124	1B5V124	77.55	12.68	12	12.4	12.5	7/8	2A	B	1-15/16	3/16	11.5
1VV136	1B5V136	82.45	13.88	13.2	13.6	13.7	7/8	2A	B	1-15/16	3/16	13.3
1VV154	1B5V154	106.77	15.68	15	15.4	15.5	7/8	2A	B	1-15/16	3/16	15.5
1VV160	1B5V160	123.12	16.28	15.6	16	16.1	7/8	2A	B	1-15/16	3/16	16.6
1VV184	1B5V184	139.48	18.68	18	18.4	18.5	7/8	2A	B	1-15/16	3/16	20
1VV200	1B5V200	200.00	20.28	19.5	20	20.1	7/8	2A	B	1-15/16	3/16	21.8
1VV234	1B5V234	236.83	23.68	22.9	23.4	23.5	7/8	2A	B	1-15/16	3/16	28.2
1VV250	1B5V250	254.17	25.28	24.5	25	25.1	7/8	2A	B	1-15/16	3/16	31.4
1VV278	1B5V278	314.71	28.08	27.3	27.8	27.9	7/8	2A	B	1-15/16	3/16	36.5



TYPE 1



TYPE 2

VERSA-V Sheaves


2 Grooves

Part Number	Cross. ref.	List Price	Diameters				F = 1-23/32 inches					Approx. Wt. (lbs.)
			Outside	Datum A Belts	Datum B Belts	Pitch 5V Belts	H	Type	B	L	E	
2VV42	2B5V42	39.55	4.48	3.8	4.2	4.3	5/8	5	P1	1-15/16	13/32	3.7
2VV44	2B5V44	41.69	4.68	4	4.4	4.5	7/32	3	P1	1-15/16	0	4.1
2VV46	2B5V46	44.83	4.88	4.2	4.6	4.7	33/64	3	B	1-15/16	0	3.3
2VV48	2B5V48	46.47	5.08	4.4	4.8	4.9	33/64	3	B	1-15/16	11/64	3.9
2VV50	2B5V50	48.10	5.28	4.6	5	5.1	33/64	3	B	1-15/16	11/64	4.6
2VV52	2B5V52	49.74	5.48	4.8	5.2	5.3	33/64	3	B	1-15/16	11/64	5.3
2VV54	2B5V54	51.37	5.68	5	5.4	5.5	33/64	3	B	1-15/16	11/64	6
2VV56	2B5V56	53.01	5.88	5.2	5.6	5.7	33/64	3	B	1-15/16	11/64	6.7
2VV58	2B5V58	54.65	6.08	5.4	5.8	5.9	33/64	3	B	1-15/16	11/64	7.4
2VV60	2B5V60	56.28	6.28	5.6	6	6.1	33/64	3	B	1-15/16	11/64	8.2
2VV62	2B5V62	57.92	6.48	5.8	6.2	6.3	33/64	3	B	1-15/16	11/64	9.2
2VV64	2B5V64	59.55	6.68	6	6.4	6.5	33/64	3	B	1-15/16	11/64	8.4
2VV66	2B5V66	60.37	6.88	6.2	6.6	6.7	33/64	3	B	1-15/16	11/64	11.4
2VV68	2B5V68	61.19	7.08	6.4	6.8	6.9	33/64	4W	B	1-15/16	11/64	10.2
2VV70	2B5V70	70.78	7.28	6.6	7	7.1	33/64	4W	B	1-15/16	11/64	12.3
2VV74	2B5V74	71.60	7.68	7	7.4	7.5	33/64	4W	B	1-15/16	11/64	14.2
2VV80	2B5V80	72.42	8.28	7.6	8	8.1	33/64	4A	B	1-15/16	11/64	11.3
2VV86	2B5V86	74.05	8.88	8.2	8.6	8.7	33/64	4A	B	1-15/16	11/64	10.6
2VV90	2B5V90	74.88	9.28	8.6	9	9.1	33/64	4A	B	1-15/16	11/64	11.1
2VV94	2B5V94	75.69	9.68	9	9.4	9.5	33/64	4A	B	1-15/16	11/64	11.6
2VV110	2B5V110	87.14	11.28	10.6	11	11.1	33/64	4A	B	1-15/16	11/64	14.4
2VV124	2B5V124	93.68	12.68	12	12.4	12.5	33/64	4A	B	1-15/16	11/64	17.1
2VV136	2B5V136	110.04	13.88	13.2	13.6	13.7	33/64	4A	B	1-15/16	11/64	19.3
2VV154	2B5V154	149.29	15.68	15	15.4	15.5	33/64	4A	B	1-15/16	11/64	23.2
2VV160	2B5V160	157.47	16.28	15.6	16	16.1	33/64	4A	B	1-15/16	11/64	24.2
2VV184*	2B5V184	195.09	18.68	18	18.4	18.5	33/64	4A	B	1-15/16	11/64	33.2
2VV200*	2B5V200	229.73	20.28	19.5	20	20.1	33/64	4A	B	1-15/16	11/64	34.8
2VV234*	2B5V234	305.37	23.68	22.9	23.4	23.5	33/64	4A	B	1-15/16	11/64	37.9
2VV250*	2B5V250	340.96	25.28	24.5	25	25.1	33/64	4A	B	1-15/16	11/64	47
2VV278*	2B5V278	351.44	28.08	27.3	27.8	27.9	33/64	4A	B	1-15/16	11/64	55.9


* Please contact Baldor for lead time

3 Grooves


Part Number	Cross. ref.	List Price	Diameters				F = 2-7/16 inches					Approx. Wt. (lbs.)
			Outside	Datum A Belts	Datum B Belts	Pitch 5V Belts	H	Type	B	L	E	
3VV42	3B5V42	44.45	4.48	3.8	4.2	4.3	5/8	5	P1	1-15/16	1-1/8	4.8
3VV44	3B5V44	46.10	4.68	4	4.4	4.5	1/32	3	P1	1-15/16	17/32	5.2
3VV46	3B5V46	52.67	4.88	4.2	4.6	4.7	3/4	5	B	1-15/16	1-3/16	4.9
3VV48	3B5V48	54.31	5.08	4.4	4.8	4.9	3/4	5	B	1-15/16	1-3/16	5.5
3VV50	3B5V50	55.94	5.28	4.6	5	5.1	3/4	5	B	1-15/16	1-3/16	6.1
3VV52	3B5V52	57.58	5.48	4.8	5.2	5.3	3/4	5	B	1-15/16	1-3/16	6.7
3VV54	3B5V54	59.21	5.68	5	5.4	5.5	5/32	3	B	1-15/16	19/32	7.4
3VV56	3B5V56	60.85	5.88	5.2	5.6	5.7	5/32	3	B	1-15/16	17/32	8.4
3VV58	3B5V58	62.48	6.08	5.4	5.8	5.9	5/32	3	B	1-15/16	17/32	9.5
3VV60	3B5V60	64.12	6.28	5.6	6	6.1	5/32	3	B	1-15/16	17/32	10.6
3VV62	3B5V62	65.76	6.48	5.8	6.2	6.3	5/32	3	B	1-15/16	17/32	9.8
3VV64	3B5V64	69.03	6.68	6	6.4	6.5	5/32	3	B	1-15/16	17/32	10.5
3VV66	3B5V66	70.66	6.88	6.2	6.6	6.7	5/32	3	B	1-15/16	17/32	10.4
3VV68	3B5V68	72.30	7.08	6.4	6.8	6.9	5/32	4W	B	1-15/16	17/32	10.9
3VV70	3B5V70	78.96	7.28	6.6	7	7.1	5/32	4W	B	1-15/16	17/32	11.5
3VV74	3B5V74	80.59	7.68	7	7.4	7.5	5/32	4W	B	1-15/16	17/32	12.6
3VV80	3B5V80	83.87	8.28	7.6	8	8.1	5/32	4A	B	1-15/16	17/32	14.2
3VV86	3B5V86	90.41	8.88	8.2	8.6	8.7	5/32	4A	B	1-15/16	17/32	13.7
3VV90	3B5V90	93.68	9.28	8.6	9	9.1	5/32	4A	B	1-15/16	17/32	14.5
3VV94	3B5V94	96.95	9.68	9	9.4	9.5	5/32	4A	B	1-15/16	17/32	17
3VV110	3B5V110	113.31	11.28	10.6	11	11.1	5/32	4A	B	1-15/16	17/32	19.8
3VV124	3B5V124	129.67	12.68	12	12.4	12.5	5/32	4A	B	1-15/16	17/32	22.1



TYPE 3



TYPE 4




TYPE 5

VERSA-V Sheaves


3 Grooves (cont.)

Part Number	Cross. ref.	List Price	Diameters				F = 2-7/16 inches					Approx. Wt. (lbs.)
			Outside	Datum A Belts	Datum B Belts	Pitch 5V Belts	H	Type	B	L	E	
3VV136	3B5V136	139.48	13.88	13.2	13.6	13.7	5/32	4A	B	1-15/16	17/32	24.9
3VV154	3B5V154	175.47	15.68	15	15.4	15.5	5/32	4A	B	1-15/16	17/32	30.4
3VV160	3B5V160	185.28	16.28	15.6	16	16.1	5/32	4A	B	1-15/16	17/32	31.7
3VV184*	3B5V184	211.45	18.68	18	18.4	18.5	5/32	4A	B	1-15/16	17/32	40.9
3VV200*	3B5V200	282.07	20.28	19.5	20	20.1	5/32	4A	B	1-15/16	17/32	47.6
3VV234*	3B5V234	346.59	23.68	22.9	23.4	23.5	5/32	4A	B	1-15/16	17/32	61.5
3VV250*	3B5V250	376.94	25.28	24.5	25	25.1	5/32	4A	B	1-15/16	17/32	66.6
3VV278*	3B5V278	394.59	28.08	27.3	27.8	27.9	5/32	4A	B	1-15/16	17/32	79.1


* Please contact Baldor for lead time



TYPE 3



TYPE 4



TYPE 5

4 Grooves

Part Number	Cross ref.	List Price	Diameters				F = 3-5/32 inches					Approx. Wt. (lbs.)
			Outside	Datum A Belts	Datum B Belts	Pitch 5V Belts	H	Type	B	L	E	
4VV42	4B5V42	65.76	4.48	3.8	4.2	4.3	5/8	5	P1	1-15/16	1-27/32	5.9
4VV44	4B5V44	67.39	4.68	4.0	4.4	4.5	3/64	3	P1	1-15/16	1-17/64	6.3
4VV46	4B5V46	69.03	4.88	4.2	4.6	4.7	3/4	5	B	1-15/16	1-29/32	6.1
4VV48	4B5V48	70.66	5.08	4.4	4.8	4.9	3/4	5	B	1-15/16	1-29/32	6.7
4VV50	4B5V50	72.30	5.28	4.6	5.0	5.1	3/4	5	B	1-15/16	1-29/32	7.4
4VV52	4B5V52	73.93	5.48	4.8	5.2	5.3	3/4	5	B	1-15/16	1-29/32	8.0
4VV54	4B5V54	75.57	5.68	5.0	5.4	5.5	-	3	B	1-15/16	61/64	8.9
4VV56	4B5V56	77.21	5.88	5.2	5.6	5.7	-	3	B	1-15/16	57/64	9.5
4VV58	4B5V58	78.84	6.08	5.4	5.8	5.9	-	3	B	1-15/16	57/64	10.3
4VV60	4B5V60	80.48	6.28	5.6	6.0	6.1	-	3	B	1-15/16	57/64	11.0
4VV62	4B5V62	82.11	6.48	5.8	6.2	6.3	-	3	B	1-15/16	57/64	11.3
4VV64	4B5V64	85.38	6.68	6.0	6.4	6.5	-	3	B	1-15/16	57/64	12.1
4VV66	4B5V66	88.66	6.88	6.2	6.6	6.7	-	3	B	1-15/16	57/64	12.0
4VV68	4B5V68	91.93	7.08	6.4	6.8	6.9	-	3	B	1-15/16	57/64	12.6
4VV70	4B5V70	100.22	7.28	6.6	7.0	7.1	-	4W	B	1-15/16	57/64	13.2
4VV74	4B5V74	103.49	7.68	7.0	7.4	7.5	-	4W	B	1-15/16	57/64	14.5
4VV80	4B5V80	106.77	8.28	7.6	8.0	8.1	-	4A	B	1-15/16	57/64	15.2
4VV86	4B5V86	113.31	8.88	8.2	8.6	8.7	-	4A	B	1-15/16	57/64	16.6
4VV90	4B5V90	119.04	9.28	8.6	9.0	9.1	-	4A	B	1-15/16	57/64	17.6
4VV94	4B5V94	124.76	9.68	9.0	9.4	9.5	-	4A	B	1-15/16	57/64	20.0
4VV110	4B5V110	136.21	11.28	10.6	11.0	11.1	-	4A	B	1-15/16	57/64	22.8
4VV124	4B5V124	150.93	12.68	12.0	12.4	12.5	-	4A	B	1-15/16	57/64	26.5
4VV136	4B5V136	178.74	13.88	13.2	13.6	13.7	-	4A	B	1-15/16	57/64	30.7
4VV154	4B5V154	200.29	15.68	15.0	15.4	15.5	-	4A	B	1-15/16	57/64	37.9
4VV160	4B5V160	216.64	16.28	15.6	16.0	16.1	-	4A	B	1-15/16	57/64	40.5
4VV184*	4B5V184	229.73	18.68	18.0	18.4	18.5	-	4A	B	1-15/16	57/64	50.7
4VV200*	4B5V200	314.79	20.28	19.5	20.0	20.1	-	4A	B	1-15/16	57/64	58.5
4VV234*	4B5V234	399.92	23.68	22.9	23.4	23.5	-	4A	B	1-15/16	57/64	73.9
4VV250*	4B5V250	439.98	25.28	24.5	25.0	25.1	-	4A	B	1-15/16	57/64	83.8
4VV278*	4B5V278	470.41	28.08	27.3	27.8	27.9	-	4A	B	1-15/16	57/64	94.3

* Please contact Baldor for lead time

TB Sheaves (Split taper)



Features: Used with conventional A and B belts. Available in 1 to 4 grooves.
P1 Bushing used with the majority of the TB Sheaves. General industrial applications

Note: The type of sheave construction is indicated in the column entitled Type. The number refers to the drawing and the letter as follows:


A = arms; B = block; W = web.

How to order: Example: 2TB154; 2 = Number of grooves. TB = Split taper type sheaves, 154 = Datum diameter for B belts (15.4")


1 Grooves

Part Number	Cross. Ref.	List Price	Diameters			F = 1 inch					Approx. Wt. (lbs.)
			Outside	Datum A Belts	Datum B Belts	H	Type	B	L	E	
1TB34	1TB34	24.47	3.75	3	3.4	1-1/16	2	P1	1-15/16	1/8	2
1TB36	1TB36	25.30	3.95	3.6	3.2	1-1/16	2	P1	1-15/16	1/8	2.3
1TB38	1TB38	26.07	4.15	3.4	3.8	1-1/16	2	P1	1-15/16	1/8	2.6
1TB40	1TB40	26.90	4.35	3.6	4	5/8	10B	P1	1-15/16	5/16	2.1
1TB42	1TB42	27.70	4.55	3.8	4.2	5/8	10B	P1	1-15/16	5/16	2.4
1TB44	1TB44	28.53	4.75	4	4.4	5/8	10B	P1	1-15/16	5/16	2.8
1TB46	1TB46	31.60	4.95	4.2	4.6	5/8	10B	P1	1-15/16	5/16	3.1
1TB48	1TB48	32.40	5.15	4.4	4.8	5/8	10B	P1	1-15/16	5/16	3.5
1TB50	1TB50	33.20	5.35	4.6	5	5/8	10B	P1	1-15/16	5/16	3.9
1TB52	1TB52	34.20	5.55	4.8	5.2	5/8	10B	P1	1-15/16	5/16	4.1
1TB54	1TB54	34.83	5.75	5	5.4	5/8	10B	P1	1-15/16	5/16	4.6
1TB56	1TB56	35.67	5.95	5.2	5.6	5/8	10B	P1	1-15/16	5/16	5.1
1TB58	1TB58	36.43	6.15	5.4	5.8	5/8	10B	P1	1-15/16	5/16	5.6
1TB60	1TB60	38.07	6.35	5.6	6	5/8	10W	P1	1-15/16	5/16	6
1TB62	1TB62	39.70	6.55	5.8	6.2	5/8	10W	P1	1-15/16	5/16	5.5
1TB64	1TB64	41.30	6.75	6	6.4	5/8	10W	P1	1-15/16	5/16	5.8
1TB66	1TB66	44.53	6.95	6.2	6.6	5/8	10W	P1	1-15/16	5/16	5.9
1TB68	1TB68	46.17	7.15	6.4	6.8	5/8	10W	P1	1-15/16	5/16	6.1
1TB70	1TB70	47.80	7.35	6.6	7	25/32	16A	P1	1-15/16	5/32	6.4
1TB74	1TB74	51.03	7.75	7	7.4	25/32	16A	P1	1-15/16	5/32	7.3
1TB80	1TB80	52.63	8.35	7.6	8	25/32	16A	P1	1-15/16	5/32	7.8
1TB86	1TB86	55.90	8.95	8.2	8.6	25/32	16A	P1	1-15/16	5/32	8.6
1TB90	1TB90	56.70	9.35	8.6	9	25/32	16A	P1	1-15/16	5/32	8.9
1TB94	1TB94	57.50	9.75	9	9.4	25/32	16A	P1	1-15/16	5/32	9.1
1TB110	1TB110	67.23	11.35	10.6	11	25/32	16A	P1	1-15/16	5/32	11.1
1TB124	1TB124	68.33	12.75	12	12.4	1-1/8	16A	Q1	2-1/2	3/8	17.8
1TB136	1TB136	73.20	13.95	13.2	13.6	1-1/8	16A	Q1	2-1/2	3/8	18.2
1TB154	1TB154	98.33	15.75	15	15.4	1-1/8	16A	Q1	2-1/2	3/8	20.3
1TB160	1TB160	114.53	16.35	15.6	16	1-1/8	16A	Q1	2-1/2	3/8	22
1TB184*	1TB184	130.73	18.75	18	18.4	1-1/8	16A	Q1	2-1/2	3/8	27.5
1TB200*	1TB200	190.67	20.35	19.5	20	1-1/8	16A	Q1	2-1/2	3/8	27.2
1TB250*	1TB250	243.97	25.35	24.5	25	1-1/8	16A	Q1	2-1/2	3/8	42.4
1TB300*	1TB300	365.93	30.35	29.5	30	1-1/8	16A	Q1	2-1/2	3/8	56
1TB380*	1TB380	531.87	38.35	37.5	38	1-1/8	16A	Q1	2-1/2	3/8	78


* Please contact Baldor for lead time



TYPE 2



TYPE 10



TYPE 16

TB Sheaves

2 Grooves


Part Number	Cross. Ref.	List Price	Diameters			F = 1-3/4 inches					Approx. Wt. (lbs.)
			Outside	Datum A Belts	Datum B Belts	H	Type	B	L	E	
2TB34	2TB34	34.17	3.75	3	3.4	1-1/16	2	P1	1-15/16	7/8	2.9
2TB36	2TB36	35.80	3.95	3.2	3.6	1-1/16	2	P1	1-15/16	7/8	3.8
2TB38	2TB38	37.43	4.15	3.4	3.8	5/8	5	P1	1-15/16	7/16	3
2TB40	2TB40	39.03	4.35	3.6	4	5/8	5	P1	1-15/16	7/16	3.8
2TB42	2TB42	40.67	4.55	3.8	4.2	5/8	5	P1	1-15/16	7/16	3.9
2TB44	2TB44	42.23	4.75	4	4.4	3/16	13B	P1	1-15/16	0	3.9
2TB46	2TB46	46.17	4.95	4.2	4.6	3/16	13B	P1	1-15/16	0	4.5
2TB48	2TB48	47.80	5.15	4.4	4.8	3/16	13B	P1	1-15/16	0	5.3
2TB50	2TB50	49.40	5.35	4.6	5	3/16	13B	P1	1-15/16	0	5.6
2TB52	2TB52	51.03	5.55	4.8	5.2	3/16	13B	P1	1-15/16	0	6.1
2TB54	2TB54	52.63	5.75	5	5.4	3/16	13B	P1	1-15/16	0	6.5
2TB56	2TB56	54.27	5.95	5.2	5.6	3/16	13B	P1	1-15/16	0	7.4
2TB58	2TB58	55.90	6.15	5.4	5.8	3/16	13B	P1	1-15/16	0	8
2TB60	2TB60	57.50	6.35	5.6	6	3/16	13B	P1	1-15/16	0	8.9
2TB62	2TB62	59.13	6.55	5.8	6.2	3/16	13W	P1	1-15/16	0	7.6
2TB64	2TB64	60.73	6.75	6	6.4	3/16	13W	P1	1-15/16	0	7.8
2TB66	2TB66	61.57	6.95	6.2	6.6	3/16	13W	P1	1-15/16	0	8.3
2TB68	2TB68	62.37	7.15	6.4	6.8	3/16	13W	P1	1-15/16	0	8.8
2TB70	2TB70	62.67	7.35	6.6	7	3/4	13W	Q1	2-1/2	0	11.1
2TB74	2TB74	63.50	7.75	7	7.4	3/4	13W	Q1	2-1/2	0	11.5
2TB80	2TB80	64.30	8.35	7.6	8	3/4	13W	Q1	2-1/2	0	12.8
2TB86	2TB86	65.93	8.95	8.2	8.6	3/4	13W	Q1	2-1/2	0	16
2TB90	2TB90	66.73	9.35	8.6	9	3/4	13A	Q1	2-1/2	0	15.1
2TB94	2TB94	67.53	9.75	9	9.4	3/4	13A	Q1	2-1/2	0	15.5
2TB110	2TB110	78.87	11.35	10.6	11	3/4	13A	Q1	2-1/2	0	18.9
2TB124	2TB124	85.37	12.75	12	12.4	3/4	13A	Q1	2-1/2	0	21.1
2TB136	2TB136	101.57	13.95	13.2	13.6	3/4	13A	Q1	2-1/2	0	23
2TB154	2TB154	140.43	15.75	15	15.4	3/4	13A	Q1	2-1/2	0	24.8
2TB160	2TB160	148.53	16.35	15.6	16	3/4	13A	Q1	2-1/2	0	27
2TB184*	2TB184	185.80	18.75	18	18.4	3/4	13A	Q1	2-1/2	0	32.8
2TB200*	2TB200	220.60	20.35	19.5	20	3/4	13A	Q1	2-1/2	0	42.3
2TB250*	2TB250	330.77	25.35	24.5	25	3/4	13A	Q1	2-1/2	0	50.3
2TB300*	2TB300	366.40	30.35	29.5	30	3/4	13A	Q1	2-1/2	0	68.8
2TB380*	2TB380	690.40	38.35	37.5	38	3/4	13A	Q1	2-1/2	0	95.5

* Please contact Baldor for lead time


3 Grooves

Part Number	Cross. Ref.	List Price	Diameters			F = 2-1/2 inches					Approx. Wt. (lbs.)
			Outside	Datum A Belts	Datum B Belts	H	Type	B	L	E	
3TB34	3TB34	38.00	3.75	3	3.4	1-1/16	3	P2	2-15/16	5/8	3.8
3TB36	3TB36	39.63	3.95	3.2	3.6	1-1/16	3	P2	2-15/16	5/8	4.4
3TB38	3TB38	42.27	4.15	3.4	3.8	5/8	5	P1	1-15/16	1-3/16	3.8
3TB40	3TB40	43.90	4.35	3.6	4	5/8	5	P1	1-15/16	1-3/16	4.5
3TB42	3TB42	45.53	4.55	3.8	4.2	5/8	5	P1	1-15/16	1-3/16	4.9
3TB44	3TB44	47.13	4.75	4	4.4	0	13B	P1	1-15/16	9/16	5.1
3TB46	3TB46	54.27	4.95	4.2	4.6	0	13W	P1	1-15/16	9/16	6
3TB48	3TB48	55.90	5.15	4.4	4.8	0	13W	P1	1-15/16	9/16	6.3
3TB50	3TB50	57.50	5.35	4.6	5	0	13W	P1	1-15/16	9/16	6.9
3TB52	3TB52	59.13	5.55	4.8	5.2	0	13W	P1	1-15/16	9/16	7.5
3TB54	3TB54	60.73	5.75	5	5.4	0	13W	P1	1-15/16	9/16	8.3
3TB56	3TB56	62.37	5.95	5.2	5.6	0	13W	P1	1-15/16	9/16	9
3TB58	3TB58	64.00	6.15	5.4	5.8	0	13W	P1	1-15/16	9/16	9.6
3TB60	3TB60	65.60	6.35	5.6	6	0	13W	P1	1-15/16	9/16	10.5
3TB62	3TB62	67.23	6.55	5.8	6.2	0	13W	P1	1-15/16	9/16	9.4
3TB64	3TB64	70.47	6.75	6	6.4	0	13W	P1	1-15/16	9/16	9.5
3TB66	3TB66	72.10	6.95	6.2	6.6	0	13W	P1	1-15/16	9/16	10
3TB68	3TB68	73.70	7.15	6.4	6.8	0	13W	P1	1-15/16	9/16	10.4


For more details and additional products, see complete Baldor•Maska® Product Catalog or www.baldor.com



TYPE 2



TYPE 5



TYPE 13

Motor
Accessories

PT Components

Grinders

Baldor
Mod Express

ABB
Mod Express

ABB ATEX
Mod Express


Product
Index

TB Sheaves

3 Grooves (cont.)

Part Number	Cross. Ref.	List Price	Diameters			F = 2-1/2 inches					Approx. Wt. (lbs.)
			Outside	Datum A Belts	Datum B Belts	H	Type	B	L	E	
3TB70	3TB70	70.77	7.35	6.6	7	3/8	13W	Q1	2-1/2	3/8	13
3TB74	3TB74	72.40	7.75	7	7.4	3/8	13W	Q1	2-1/2	3/8	13.3
3TB80	3TB80	75.63	8.35	7.6	8	3/8	13W	Q1	2-1/2	3/8	15.3
3TB86	3TB86	82.13	8.95	8.2	8.6	3/8	13W	Q1	2-1/2	3/8	18.9
3TB90	3TB90	85.37	9.35	8.6	9	3/8	13A	Q1	2-1/2	3/8	18.1
3TB94	3TB94	88.60	9.75	9	9.4	3/8	13A	Q1	2-1/2	3/8	18
3TB110	3TB110	104.80	11.35	10.6	11	3/8	13A	Q1	2-1/2	3/8	21.3
3TB124	3TB124	121.00	12.75	12	12.4	3/8	13A	Q1	2-1/2	3/8	25.4
3TB136	3TB136	130.73	13.95	13.2	13.6	3/8	13A	Q1	2-1/2	3/8	27.4
3TB154*	3TB154	166.37	15.75	15	15.4	3/8	13A	Q1	2-1/2	3/8	29.8
3TB160*	3TB160	176.07	16.35	15.6	16	3/8	13A	Q1	2-1/2	3/8	32
3TB184*	3TB184	201.93	18.75	18	18.4	3/8	13A	Q1	2-1/2	3/8	37.8
3TB200*	3TB200	272.47	20.35	19.5	20	3/8	13A	Q1	2-1/2	3/8	49.9
3TB250*	3TB250	366.40	25.35	24.5	25	3/8	13A	Q1	2-1/2	3/8	61
3TB300*	3TB300	415.00	30.35	29.5	30	3/8	13A	Q1	2-1/2	3/8	78.5
3TB380*	3TB380	756.83	38.35	37.5	38	3/8	13A	Q1	2-1/2	3/8	110

* Please contact Baldor for lead time



TYPE 13

Classical A/B Combination, C & D



Features: Complete line in stock, including larger models. Designed for use with QD bushing & corresponding belts. A/B models from 1-6; 8; 10 grooves. C model from 1-6; 8; 10; 12 grooves. D model from 3-6; 8; 10; 12 grooves.

Note: DO NOT use these gray cast iron sheaves with rim speeds in excess of 6500 feet per minute.

How to order: Example: 6B70; 6=Number of grooves. B = "A/B" Combination sheave section. 70 = Datum diameter for "B" belts (7.0")

"A/B" COMBINATION 1 GROOVE


Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.		O.D.	F = 7/8 up to 7.15 O.D. & 1 inch thereafter					
			A(4L) Belts	B(5L) Belts		H	Type	B	L	E	Approx. Wt. (lbs)
1B34 ¹	26.00	QDS05	3.0	3.4	3.75	5/8	11B	SH	1-1/4	1/4	1.2
1B36	27.00	QDS05	3.2	3.6	3.95	1/2	6B	SH	1-1/4	1/8	1.3
1B38	28.00	QDS05	3.4	3.8	4.15	1/2	6B	SH	1-1/4	1/8	1.6
1B40	29.00	QDS05	3.6	4.0	4.35	1/2	6B	SH	1-1/4	1/8	1.9
1B42	30.00	QDS05	3.8	4.2	4.55	1/2	6B	SH	1-1/4	1/8	2.1
1B44	31.00	QDS05	4.0	4.4	4.75	1/2	6B	SH	1-1/4	1/8	2.4
1B46	32.00	QDS05	4.2	4.6	4.95	7/16	7B	SDS	1-5/16	0	2.4
1B48	33.00	QDS05	4.4	4.8	5.15	7/16	7B	SDS	1-5/16	0	2.8
1B50	34.00	QDS05	4.6	5.0	5.35	7/16	7B	SDS	1-5/16	0	3.1
1B52	35.00	QDS05	4.8	5.2	5.55	7/16	7B	SDS	1-5/16	0	3.3
1B54	36.00	QDS05	5.0	5.4	5.75	7/16	7B	SDS	1-5/16	0	3.7
1B56	37.00	QDS05	5.2	5.6	5.95	7/16	7B	SDS	1-5/16	0	4.0
1B58	38.00	QDS05	5.4	5.8	6.15	7/16	7B	SDS	1-5/16	0	4.3
1B60	40.00	QDS05	5.6	6.0	6.35	7/16	7B	SDS	1-5/16	0	4.7
1B62	42.00	QDS05	5.8	6.2	6.55	7/16	7B	SDS	1-5/16	0	5.1
1B64	44.00	QDS05	6.0	6.4	6.75	7/16	7B	SDS	1-5/16	0	5.4
1B66	48.00	QDS05	6.2	6.6	6.95	7/16	7B	SDS	1-5/16	0	5.5
1B68	50.00	QDS05	6.4	6.8	7.15	7/16	7B	SDS	1-5/16	0	5.5
1B70	52.00	QDS05	6.6	7.0	7.35	9/16	6A	SDS	1-5/16	1/4	6.0
1B74	56.00	QDS05	7.0	7.4	7.75	9/16	6A	SDS	1-5/16	1/4	6.3
1B80	58.00	QDS05	7.6	8.0	8.35	9/16	6A	SDS	1-5/16	1/4	6.7
1B86	62.00	QDS05	8.2	8.6	8.95	9/16	6A	SDS	1-5/16	1/4	7.7
1B90	63.00	QDS05	8.6	9.0	9.35	9/16	6A	SDS	1-5/16	1/4	8.6
1B94	64.00	QDS05	9.0	9.4	9.75	9/16	6A	SDS	1-5/16	1/4	9.1
1B110	76.00	QDS05	10.6	11.0	11.35	9/16	6A	SDS	1-5/16	1/4	11.4
1B124	90.00	QDS05	12.0	12.4	12.75	9/16	6A	SDS	1-5/16	1/4	13.0
1B136	96.00	QDS05	13.2	13.6	13.95	9/16	6A	SDS	1-5/16	1/4	13.3
1B154	116.00	QDS05	15.0	15.4	15.75	11/16	5A	SK	1-7/8	3/16	20.7
1B160	136.00	QDS05	15.6	16.0	16.35	7/8	3A	SK	1-7/8	0	22.1
1B184	156.00	QDS05	18.0	18.4	18.75	15/16	10A	SK	1-7/8	1/16	26.0
1B200	230.00	QDS05	19.6	20.0	20.35	13/16	5A	SK	1-7/8	1/16	28.2
1B250	350.00	QDS05	24.6	25.0	25.35	15/16	10A	SK	1-7/8	1/16	39.6


P.D. for "A" (4L) Belts = Datum Dia. + .35" = O.D. - .40 P.D. for "B" (5L) Belts = O.D. 1 Reverse mount only.

Type of sheave "T": A = arms; B = block; W = web


For more details and additional products, see complete Baldor•Maska® Product Catalog or www.baldor.com




TYPE 3




TYPE 5



TYPE 6



TYPE 7



TYPE 10

"A/B" COMBINATION

2 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.		O.D.	F = 1-3/4 inches					
			A(4L) Belts	B(5L) Belts		H	Type	B	L	E	Approx.Wt. (lbs)
2B341*	38.00	QDS05	3.0	3.4	3.75	5/8	11B	SH	1-1/4	1-1/8	2.5
2B36 ²	40.00	QDS05	3.2	3.6	3.95	15/32	6B	SH	1-1/4	31/32	2.5
2B38 ²	42.00	QDS05	3.4	3.8	4.15	15/32	6B	SH	1-1/4	31/32	2.9
2B40 ²	44.00	QDS05	3.6	4.0	4.35	15/32	6B	SH	1-1/4	31/32	3.4
2B42*	46.00	QDS05	3.8	4.2	4.55	1/16	1B	SH	1-1/4	7/16	3.5
2B44	48.00	QDS05	4.0	4.4	4.75	1/16	1B	SH	1-1/4	7/16	3.8
2B46*	50.00	QDS05	4.2	4.6	4.95	0	4B	SDS	1-5/16	7/16	3.9
2B48	52.00	QDS05	4.4	4.8	5.15	0	4B	SDS	1-5/16	7/16	4.3
2B50	54.00	QDS05	4.6	5.0	5.35	0	4B	SDS	1-5/16	7/16	4.8
2B52	56.00	QDS05	4.8	5.2	5.55	0	4B	SDS	1-5/16	7/16	5.2
2B54	58.00	QDS05	5.0	5.4	5.75	0	4B	SDS	1-5/16	7/16	5.6
2B56	60.00	QDS05	5.2	5.6	5.95	0	4B	SDS	1-5/16	7/16	6.0
2B58	62.00	QDS05	5.4	5.8	6.15	0	4W	SDS	1-5/16	7/16	6.1
2B60	64.00	QDS05	5.6	6.0	6.35	0	4W	SDS	1-5/16	7/16	6.5
2B62	66.00	QDS05	5.8	6.2	6.55	0	4W	SDS	1-5/16	7/16	6.8
2B64	68.00	QDS05	6.0	6.4	6.75	0	4W	SDS	1-5/16	7/16	7.4
2B66	69.00	QDS05	6.2	6.6	6.95	0	4W	SDS	1-5/16	7/16	7.6
2B68	71.00	QDS05	6.4	6.8	7.15	0	4W	SDS	1-5/16	7/16	7.9
2B70	72.00	QDS05	6.6	7.0	7.35	3/8	6W	SK	1-7/8	1/4	9.3
2B74	73.00	QDS05	7.0	7.4	7.75	3/8	6W	SK	1-7/8	1/4	10.5
2B80	74.00	QDS05	7.6	8.0	8.35	3/8	6W	SK	1-7/8	1/4	11.6
2B86	76.00	QDS05	8.2	8.6	8.95	3/8	6A	SK	1-7/8	1/4	11.7
2B90	77.00	QDS05	8.6	9.0	9.35	3/8	6A	SK	1-7/8	1/4	12.2
2B94	78.00	QDS05	9.0	9.4	9.75	3/8	6A	SK	1-7/8	1/4	13.3
2B110	92.00	QDS05	10.6	11.0	11.35	3/8	6A	SK	1-7/8	1/4	15.1
2B124	100.00	QDS05	12.0	12.4	12.75	9/16	6A	SK	1-7/8	7/16	18.4
2B136	120.00	QDS05	13.2	13.6	13.95	3/8	6A	SK	1-7/8	1/4	23.5
2B154	168.00	QDS05	15.0	15.4	15.75	3/8	6A	SK	1-7/8	1/4	26.4
2B160	178.00	QDS05	15.6	16.0	16.35	3/8	6A	SK	1-7/8	1/4	28.1
2B184	224.00	QDS05	18.0	18.4	18.75	3/8	6A	SK	1-7/8	1/4	36.0
2B200	260.00	QDS05	19.6	20.0	20.35	11/16	6A	SF	2	7/16	37.0
2B250	396.00	QDS05	24.6	25.0	25.35	3/8	6A	SF	2	1/8	66.0
2B300	440.00	QDS05	29.6	30.0	30.35	7/16	6A	SF	2	3/16	73.3
2B380	840.00	QDS05	37.6	38.0	38.35	11/32	6A	SF	2	3/32	95.0

P.D. for "A" (4L) Belts = Datum Dia. + .35" = O.D. - .40


P.D. for "B" (5L) Belts = O.D.

1 Reverse mount only.


2 This sheave can only be reverse mounted with standard bushing bolts. Specials bolts (not provided by Baldor) are required for standard mount.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web




TYPE 1



TYPE 4



TYPE 6



TYPE 11

"A/B" COMBINATION

3 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.		O.D.	F = 2-1/2 inches						Approx. Wt. (lbs)
			"A" Belts	"B" Belts		H	Type	B	L	E		
3B341*	44.00	QDS05	3.0	3.4	3.75	5/8	11B	SH	1-1/4	1-7/8	3.3	
3B36 ¹	46.00	QDS05	3.2	3.6	3.95	1/2	6B	SH	1-1/4	1-3/4	3.6	
3B38 ¹	48.00	QDS05	3.4	3.8	4.15	1/2	6B	SH	1-1/4	1-3/4	4.0	
3B40 ¹	50.00	QDS05	3.6	4.0	4.35	5/8	11B	SH	1-1/4	1-7/8	4.3	
3B42*	52.00	QDS05	3.8	4.2	4.55	7/16	1B	SH	1-1/4	13/16	4.5	
3B44	54.00	QDS05	4.0	4.4	4.75	7/16	1B	SH	1-1/4	13/16	5.0	
3B46*	56.00	QDS05	4.2	4.6	4.95	3/8	1B	SD	1-13/16	5/16	5.6	
3B48	58.00	QDS05	4.4	4.8	5.15	3/8	1B	SD	1-13/16	5/16	6.2	
3B50	60.00	QDS05	4.6	5.0	5.35	3/8	1B	SD	1-13/16	5/16	6.9	
3B52	62.00	QDS05	4.8	5.2	5.55	3/8	1B	SD	1-13/16	5/16	7.5	
3B54	64.00	QDS05	5.0	5.4	5.75	3/8	1B	SD	1-13/16	5/16	8.1	
3B56	66.00	QDS05	5.2	5.6	5.95	3/8	1B	SD	1-13/16	5/16	8.7	
3B58	68.00	QDS05	5.4	5.8	6.15	3/8	1W	SD	1-13/16	5/16	9.0	
3B60	70.00	QDS05	5.6	6.0	6.35	3/8	1W	SD	1-13/16	5/16	9.5	
3B62	72.00	QDS05	5.8	6.2	6.55	3/8	1W	SD	1-13/16	5/16	9.6	
3B64	76.00	QDS05	6.0	6.4	6.75	3/8	1W	SD	1-13/16	5/16	10.3	
3B66	78.00	QDS05	6.2	6.6	6.95	3/8	1W	SD	1-13/16	5/16	10.4	
3B68	80.00	QDS05	6.4	6.8	7.15	3/8	1W	SD	1-13/16	5/16	10.7	
3B70	82.00	QDS05	6.6	7.0	7.35	1/8	6W	SK	1-7/8	3/4	11.9	
3B74	84.00	QDS05	7.0	7.4	7.75	1/8	6W	SK	1-7/8	3/4	12.4	
3B80	88.00	QDS05	7.6	8.0	8.35	1/8	6W	SK	1-7/8	3/4	13.4	
3B86	96.00	QDS05	8.2	8.6	8.95	1/8	6A	SK	1-7/8	3/4	13.7	
3B90	100.00	QDS05	8.6	9.0	9.35	1/8	6A	SK	1-7/8	3/4	15.0	
3B94	104.00	QDS05	9.0	9.4	9.75	1/8	6A	SK	1-7/8	3/4	16.2	
3B110	124.00	QDS05	10.6	11.0	11.35	1/8	6A	SK	1-7/8	3/4	21.9	
3B124	144.00	QDS05	12.0	12.4	12.75	1/8	6A	SK	1-7/8	3/4	25.0	
3B136	156.00	QDS05	13.2	13.6	13.95	1/8	6A	SK	1-7/8	3/4	28.1	
3B154	200.00	QDS05	15.0	15.4	15.75	1/8	6A	SK	1-7/8	3/4	30.8	
3B160	212.00	QDS05	15.6	16.0	16.35	1/8	6A	SK	1-7/8	3/4	31.7	
3B184	244.00	QDS05	18.0	18.4	18.75	1/8	6A	SK	1-7/8	3/4	41.6	
3B200	324.00	QDS05	19.6	20.0	20.35	3/16	6A	SF	2	11/16	49.0	
3B250	440.00	QDS05	24.6	25.0	25.35	3/16	6A	SF	2	11/16	67.0	
3B300	500.00	QDS05	29.6	30.0	30.35	3/16	6A	SF	2	11/16	96.0	
3B380	880.00	QDS07	37.6	38.0	38.35	3/8	6A	E	2-5/8	1/4	145.0	


P.D. for "A" (4L) Belts = Datum Dia. + .35" = O.D. - .40

P.D. for "B" (5L) Belts = O.D.


¹ Reverse mount only.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web



TYPE 1



TYPE 6



TYPE 11

Motor
Accessories

PT Components

Grinders

Baldor
Mod Express

ABB
Mod Express

ABB ATEX
Mod Express

Product
Index

"A/B" COMBINATION

4 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.		O.D.	F = 3-1/4 inches						Approx. Wt. (lbs)
			"A" Belts	"B" Belts		H	Type	B	L	E		
4B341*	64.00	QDS05	3.0	3.4	3.75	1	10B	SD	1-13/16	2-7/16	4.2	
4B361*	66.00	QDS05	3.2	3.6	3.95	1	10B	SD	1-13/16	2-7/16	4.7	
4B381*	68.00	QDS05	3.4	3.8	4.15	1	10B	SD	1-13/16	2-7/16	5.1	
4B401*	70.00	QDS05	3.6	4.0	4.35	11/16	11B	SD	1-13/16	2-1/8	5.3	
4B421*	72.00	QDS05	3.8	4.2	4.55	11/16	11B	SD	1-13/16	2-1/8	5.9	
4B44*	74.00	QDS05	4.0	4.4	4.75	11/16	11B	SD	1-13/16	2-1/8	6.5	
4B46*	76.00	QDS05	4.2	4.6	4.95	5/8	1B	SD	1-13/16	13/16	6.7	
4B48	78.00	QDS05	4.4	4.8	5.15	5/8	1B	SD	1-13/16	13/16	7.4	
4B50	80.00	QDS05	4.6	5.0	5.35	5/8	1B	SD	1-13/16	13/16	8.2	
4B52	82.00	QDS05	4.8	5.2	5.55	5/8	1B	SD	1-13/16	13/16	8.9	
4B54	84.00	QDS05	5.0	5.4	5.75	5/8	1B	SD	1-13/16	13/16	9.6	
4B56	86.00	QDS05	5.2	5.6	5.95	5/8	1B	SD	1-13/16	13/16	10.4	
4B58	88.00	QDS05	5.4	5.8	6.15	5/8	1W	SD	1-13/16	13/16	10.7	
4B60	90.00	QDS05	5.6	6.0	6.35	5/8	1W	SD	1-13/16	13/16	11.0	
4B62	92.00	QDS05	5.8	6.2	6.55	5/8	1W	SD	1-13/16	13/16	11.7	
4B64	96.00	QDS05	6.0	6.4	6.75	5/8	1W	SD	1-13/16	13/16	11.7	
4B66	100.00	QDS05	6.2	6.6	6.95	5/8	1W	SD	1-13/16	13/16	11.8	
4B68	104.00	QDS05	6.4	6.8	7.15	5/8	1W	SD	1-13/16	13/16	12.5	
4B70	108.00	QDS05	6.6	7.0	7.35	3/16	1W	SK	1-7/8	1-3/16	13.1	
4B74	112.00	QDS05	7.0	7.4	7.75	3/16	1W	SK	1-7/8	1-3/16	14.9	
4B80	116.00	QDS05	7.6	8.0	8.35	3/16	1W	SK	1-7/8	1-3/16	15.6	
4B86	124.00	QDS05	8.2	8.6	8.95	3/16	1A	SK	1-7/8	1-3/16	17.2	
4B90	131.00	QDS05	8.6	9.0	9.35	3/16	1A	SK	1-7/8	1-3/16	17.5	
4B94	138.00	QDS05	9.0	9.4	9.75	3/16	1A	SK	1-7/8	1-3/16	19.0	
4B110	152.00	QDS05	10.6	11.0	11.35	3/16	1A	SK	1-7/8	1-3/16	25.4	
4B124	170.00	QDS05	12.0	12.4	12.75	3/16	1A	SK	1-7/8	1-3/16	28.7	
4B136	204.00	QDS05	13.2	13.6	13.95	3/16	1A	SK	1-7/8	1-3/16	34.0	
4B154	224.00	QDS05	15.0	15.4	15.75	3/16	1A	SF	2	1-1/16	37.8	
4B160	244.00	QDS05	15.6	16.0	16.35	3/16	1A	SF	2	1-1/16	41.6	
4B184	260.00	QDS05	18.0	18.4	18.75	3/16	1A	SF	2	1-1/16	48.0	
4B200	364.00	QDS05	19.6	20.0	20.35	3/16	1A	SF	2	1-1/16	61.4	
4B250	480.00	QDS05	24.6	25.0	25.35	1/16	6A	E	2-5/8	11/16	104.0	
4B300	560.00	QDS05	29.6	30.0	30.35	1/16	6A	E	2-5/8	11/16	120.0	
4B380	980.00	QDS07	37.6	38.0	38.35	0	4A	E	2-5/8	5/8	142.0	


P.D. for "A" (4L) Belts = Datum Dia. + .35" = O.D. - .40

P.D. for "B" (5L) Belts = O.D.


1 Reverse mount only.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web




TYPE 1




TYPE 4



TYPE 6



TYPE 10



TYPE 11

"A/B" COMBINATION

5 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.		O.D.	F = 4 inches					
			"A" Belts	"B" Belts		H	Type	B	L	E	Approx. Wt. (lbs)
5B341*	74.00	QDS05	3.0	3.4	3.75	1	10B	SD	1-13/16	3-3/16	4.9
5B361*	76.00	QDS05	3.2	3.6	3.95	1	10B	SD	1-13/16	3-3/16	5.7
5B381*	78.00	QDS05	3.4	3.8	4.15	1	10B	SD	1-13/16	3-3/16	6.1
5B401*	80.00	QDS05	3.6	4.0	4.35	11/16	11B	SD	1-13/16	2-7/8	6.3
5B421*	82.00	QDS05	3.8	4.2	4.55	11/16	11B	SD	1-13/16	2-7/8	7.0
5B441*	84.00	QDS05	4.0	4.4	4.75	11/16	11B	SD	1-13/16	2-7/8	7.7
5B46*	86.00	QDS05	4.2	4.6	4.95	5/8	1B	SD	1-13/16	1-9/16	7.7
5B48	90.00	QDS05	4.4	4.8	5.15	5/8	1B	SD	1-13/16	1-9/16	8.7
5B50	92.00	QDS05	4.6	5.0	5.35	5/8	1B	SD	1-13/16	1-9/16	9.6
5B52	94.00	QDS05	4.8	5.2	5.55	5/8	1B	SD	1-13/16	1-9/16	10.0
5B54	96.00	QDS05	5.0	5.4	5.75	1/2	1B	SK	1-7/8	1-5/8	10.3
5B56	98.00	QDS05	5.2	5.6	5.95	1/2	1B	SK	1-7/8	1-5/8	10.9
5B58	100.00	QDS05	5.4	5.8	6.15	1/2	1B	SK	1-7/8	1-5/8	11.6
5B60	106.00	QDS05	5.6	6.0	6.35	1/2	1B	SK	1-7/8	1-5/8	12.6
5B62	110.00	QDS05	5.8	6.2	6.55	1/2	1B	SK	1-7/8	1-5/8	13.5
5B64	116.00	QDS05	6.0	6.4	6.75	1/2	1B	SK	1-7/8	1-5/8	14.6
5B66	120.00	QDS05	6.2	6.6	6.95	1/2	1B	SK	1-7/8	1-5/8	15.0
5B68	124.00	QDS05	6.4	6.8	7.15	1/2	1B	SK	1-7/8	1-5/8	16.1
5B70	132.00	QDS05	6.6	7.0	7.35	1/2	1B	SF	2	1-1/2	16.5
5B74	150.00	QDS05	7.0	7.4	7.75	1/2	1B	SF	2	1-1/2	19.0
5B80	154.00	QDS05	7.6	8.0	8.35	1/2	1W	SF	2	1-1/2	19.4
5B86	164.00	QDS05	8.2	8.6	8.95	1/2	1W	SF	2	1-1/2	21.1
5B90	168.00	QDS05	8.6	9.0	9.35	1/2	1A	SF	2	1-1/2	22.4
5B94	172.00	QDS05	9.0	9.4	9.75	1/2	1A	SF	2	1-1/2	23.0
5B110	194.00	QDS05	10.6	11.0	11.35	1/2	1A	SF	2	1-1/2	29.1
5B124	208.00	QDS05	12.0	12.4	12.75	1/2	1A	SF	2	1-1/2	33.9
5B136	240.00	QDS05	13.2	13.6	13.95	1/2	1A	SF	2	1-1/2	39.5
5B154	268.00	QDS05	15.0	15.4	15.75	1/2	1A	SF	2	1-1/2	44.1
5B160	294.00	QDS05	15.6	16.0	16.35	1/2	1A	SF	2	1-1/2	49.7
5B184	316.00	QDS05	18.0	18.4	18.75	1/2	1A	SF	2	1-1/2	53.3
5B200	390.00	QDS05	19.6	20.0	20.35	3/16	1A	E	2-5/8	1-3/16	77.6
5B250	500.00	QDS05	24.6	25.0	25.35	3/16	1A	E	2-5/8	1-3/16	103.0
5B300	696.00	QDS05	29.6	30.0	30.35	3/16	1A	E	2-5/8	1-3/16	131.0
5B380	1080.00	QDS07	37.6	38.0	38.35	3/16	1A	E	2-5/8	1-3/16	169.0


P.D. for "A" (4L) Belts = Datum Dia. + .35" = O.D. - .40

P.D. for "B" (5L) Belts = O.D.


1 Reverse mount only.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web



TYPE 1



TYPE 10



TYPE 11

Motor
Accessories

PT Components

Grinders

Baldor
Mod Express

ABB
Mod Express

ABB ATEX
Mod Express

Product
Index

"A/B" COMBINATION

6 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.		O.D.	F = 4-3/4 inches					
			"A" Belts	"B" Belts		H	Type	B	L	E	Approx. Wt. (lbs)
6B341*	98.00	QDS07	3.0	3.4	3.75	1-3/32	10B	SD	1-13/16	4-1/32	6.1
6B361*	100.00	QDS07	3.2	3.6	3.95	1-3/32	10B	SD	1-13/16	4-1/32	7.2
6B381*	102.00	QDS07	3.4	3.8	4.15	1-3/32	10B	SD	1-13/16	4-1/32	7.4
6B401*	104.00	QDS07	3.6	4.0	4.35	11/16	11B	SD	1-13/16	3-5/8	8.1
6B421*	106.00	QDS07	3.8	4.2	4.55	11/16	11B	SD	1-13/16	3-5/8	8.5
6B441*	110.00	QDS07	4.0	4.4	4.75	11/16	11B	SD	1-13/16	3-5/8	8.8
6B46*	112.00	QDS07	4.2	4.6	4.95	5/8	1B	SD	1-13/16	2-5/16	9.6
6B48	114.00	QDS07	4.4	4.8	5.15	5/8	1B	SD	1-13/16	2-5/16	9.9
6B50	116.00	QDS07	4.6	5.0	5.35	5/8	1B	SD	1-13/16	2-5/16	11.0
6B52	118.00	QDS07	4.8	5.2	5.55	5/8	1B	SD	1-13/16	2-5/16	11.6
6B54	120.00	QDS07	5.0	5.4	5.75	1/2	1B	SK	1-7/8	2-3/8	11.7
6B56	122.00	QDS07	5.2	5.6	5.95	1/2	1B	SK	1-7/8	2-3/8	12.8
6B58	124.00	QDS07	5.4	5.8	6.15	1/2	1B	SK	1-7/8	2-3/8	14.9
6B60	126.00	QDS07	5.6	6.0	6.35	1/2	1B	SK	1-7/8	2-3/8	14.3
6B62	130.00	QDS07	5.8	6.2	6.55	1/2	1B	SK	1-7/8	2-3/8	15.1
6B64	134.00	QDS07	6.0	6.4	6.75	1/2	1B	SK	1-7/8	2-3/8	16.9
6B66	138.00	QDS07	6.2	6.6	6.95	1/2	1B	SK	1-7/8	2-3/8	17.3
6B68	142.00	QDS07	6.4	6.8	7.15	1/2	1B	SK	1-7/8	2-3/8	18.5
6B70	150.00	QDS07	6.6	7.0	7.35	7/8	1B	SF	2	1-7/8	19.8
6B74	204.00	QDS07	7.0	7.4	7.75	7/8	1B	SF	2	1-7/8	20.9
6B80	208.00	QDS07	7.6	8.0	8.35	7/8	1W	SF	2	1-7/8	23.3
6B86	220.00	QDS07	8.2	8.6	8.95	7/8	1W	SF	2	1-7/8	25.6
6B94	230.00	QDS07	9.0	9.4	9.75	7/8	1W	SF	2	1-7/8	27.5
6B110	248.00	QDS07	10.6	11.0	11.35	7/8	1A	SF	2	1-7/8	31.2
6B124	276.00	QDS07	12.0	12.4	12.75	7/8	1A	SF	2	1-7/8	37.8
6B136	280.00	QDS07	13.2	13.6	13.95	1-3/32	1A	SF	2	1-21/32	43.7
6B154	300.00	QDS07	15.0	15.4	15.75	1-3/32	1A	SF	2	1-21/32	51.4
6B160	328.00	QDS07	15.6	16.0	16.35	7/8	1A	SF	2	1-7/8	54.7
6B184	348.00	QDS07	18.0	18.4	18.75	1-3/32	1A	SF	2	1-21/32	67.9
6B200	464.00	QDS07	19.6	20.0	20.35	3/16	1A	E	2-5/8	1-15/16	86.0
6B250	580.00	QDS07	24.6	25.0	25.35	5/16	1A	E	2-5/8	1-13/16	109.0
6B300	780.00	QDS07	29.6	30.0	30.35	5/16	1A	E	2-5/8	1-13/16	151.0
6B380	1120.00	QDS07	37.6	38.0	38.35	5/16	1A	E	2-5/8	1-13/16	207.0


P.D. for "A" (4L) Belts = Datum Dia. + .35" = O.D. - .40

P.D. for "B" (5L) Belts = O.D.


* Reverse mount only.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web



TYPE 1



TYPE 10




TYPE 11

"A/B" COMBINATION 8 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.		O.D.	F = 6-1/4 inches					
			"A" Belts	"B" Belts		H	Type	B	L	E	Approx. Wt. (lbs)
8B54	180.00	QDS07	5.0	5.4	5.75	1	1B	SK	1-7/8	3-3/8	13.5
8B56	184.00	QDS07	5.2	5.6	5.95	1	1B	SK	1-7/8	3-3/8	16.1
8B58	188.00	QDS07	5.4	5.8	6.15	1	1B	SK	1-7/8	3-3/8	19.9
8B60	192.00	QDS07	5.6	6.0	6.35	1	1B	SF	2	3-1/4	16.4
8B62	196.00	QDS07	5.8	6.2	6.55	1	1B	SF	2	3-1/4	18.0
8B64	200.00	QDS07	6.0	6.4	6.75	1	1B	SF	2	3-1/4	21.2
8B66	208.00	QDS07	6.2	6.6	6.95	1	1B	SF	2	3-1/4	20.2
8B68	212.00	QDS07	6.4	6.8	7.15	1	1B	SF	2	3-1/4	21.1
8B70	260.00	QDS07	6.6	7.0	7.35	1	1B	SF	2	3-1/4	22.4
8B74	284.00	QDS07	7.0	7.4	7.75	1	1B	SF	2	3-1/4	25.3
8B80	288.00	QDS07	7.6	8.0	8.35	1-5/16	1B	E	2-5/8	2-5/16	30.0
8B86	292.00	QDS07	8.2	8.6	8.95	1-5/16	1B	E	2-5/8	2-5/16	34.5
8B94	300.00	QDS07	9.0	9.4	9.75	1-5/16	1B	E	2-5/8	2-5/16	40.7
8B110	356.00	QDS07	10.6	11.0	11.35	1-5/16	1B	E	2-5/8	2-5/16	52.0
8B124	372.00	QDS07	12.0	12.4	12.75	1-5/16	1W	E	2-5/8	2-5/16	53.0
8B136	452.00	QDS07	13.2	13.6	13.95	1-3/8	1A	E	2-5/8	2-1/4	58.0
8B154	500.00	QDS07	15.0	15.4	15.75	1-3/8	1A	E	2-5/8	2-1/4	63.5
8B160	572.00	QDS07	15.6	16.0	16.35	1-5/16	1A	E	2-5/8	2-5/16	71.0
8B184	636.00	QDS07	18.0	18.4	18.75	3/32	1A	F	3-5/8	2-17/32	108.0
8B200	690.00	QDS07	19.6	20.0	20.35	3/32	1A	F	3-5/8	2-17/32	100.0
8B250	880.00	QDS07	24.6	25.0	25.35	3/32	1A	F	3-5/8	2-17/32	152.0
8B300	1260.00	QDS07	29.6	30.0	30.35	3/32	1A	F	3-5/8	2-17/32	186.0
8B380	1740.00	QDS07	37.6	38.0	38.35	3/32	1A	F	3-5/8	2-17/32	278.0



TYPE 1

10 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.		O.D.	F = 7-3/4 inches					
			"A" Belts	"B" Belts		H	Type	B	L	E	Approx. Wt. (lbs)
10B54	280.00	QDS07	5.0	5.4	5.75	1-3/4	1B	SK	1-7/8	4-1/8	15.5
10B56	288.00	QDS07	5.2	5.6	5.95	1-3/4	1B	SK	1-7/8	4-1/8	19.8
10B58	296.00	QDS07	5.4	5.8	6.15	1-3/4	1B	SK	1-7/8	4-1/8	18.0
10B60	304.00	QDS07	5.6	6.0	6.35	1-3/4	1B	SF	2	4	19.0
10B62	312.00	QDS07	5.8	6.2	6.55	1-3/4	1B	SF	2	4	20.0
10B64	320.00	QDS07	6.0	6.4	6.75	1-3/4	1B	SF	2	4	23.0
10B66	332.00	QDS07	6.2	6.6	6.95	1-3/4	1B	SF	2	4	21.0
10B68	344.00	QDS07	6.4	6.8	7.15	1-3/4	1B	SF	2	4	24.8
10B70	352.00	QDS07	6.6	7.0	7.35	1-3/4	1B	SF	2	4	26.0
10B74	360.00	QDS07	7.0	7.4	7.75	1-3/4	1B	SF	2	4	29.8
10B86	372.00	QDS07	8.2	8.6	8.95	2-1/16	1B	E	2-5/8	3-1/16	39.6
10B94	420.00	QDS07	9.0	9.4	9.75	2-1/16	1B	E	2-5/8	3-1/16	40.0
10B110	520.00	QDS07	10.6	11.0	11.35	2-1/16	1B	E	2-5/8	3-1/16	52.0
10B124	532.00	QDS07	12.0	12.4	12.75	2-1/16	1W	E	2-5/8	3-1/16	72.3
10B136	636.00	QDS07	13.2	13.6	13.95	27/32	1A	F	3-5/8	3-9/32	75.8
10B154	680.00	QDS07	15.0	15.4	15.75	27/32	1A	F	3-5/8	3-9/32	87.0
10B160	760.00	QDS07	15.6	16.0	16.35	27/32	1A	F	3-5/8	3-9/32	100.0
10B184	800.00	QDS07	18.0	18.4	18.75	27/32	1A	F	3-5/8	3-9/32	110.0
10B200	860.00	QDS07	19.6	20.0	20.35	27/32	1A	F	3-5/8	3-9/32	118.0
10B250	1160.00	QDS07	24.6	25.0	25.35	27/32	1A	F	3-5/8	3-9/32	183.0
10B300	1380.00	QDS07	29.6	30.0	30.35	27/32	1A	F	3-5/8	3-9/32	234.0
10B380	1780.00	QDS07	37.6	38.0	38.35	7/32	1A	J	4-1/2	3-1/32	321.0

P.D. for "A" (4L) Belts = Datum Dia. + .35" = O.D. - .40


P.D. for "B" (5L) Belts = O.D. Type of sheave "T": A = arms; B = block; W = web

"C" SECTION


1 GROOVE

Dimensions


PPart Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 1-3/8 inches					Approx. Wt. (lbs)
					H	Type	B	L	E	
1C70	112.00	QDS07	7.0	7.4	9/16	5B	SF	2	1/16	9.4
1C75	120.00	QDS07	7.5	7.9	9/16	5B	SF	2	1/16	11.5
1C80	124.00	QDS07	8.0	8.4	9/16	5B	SF	2	1/16	13.3
1C85	128.00	QDS07	8.5	8.9	9/16	5B	SF	2	1/16	15.6
1C90	132.00	QDS07	9.0	9.4	19/32	5W	SF	2	1/32	14.4
1C95	136.00	QDS07	9.5	9.9	19/32	5W	SF	2	1/32	16.0
1C100	140.00	QDS07	10.0	10.4	11/16	6W	SF	2	1/16	17.4
1C105	152.00	QDS07	10.5	10.9	11/16	6W	SF	2	1/16	17.9
1C110	172.00	QDS07	11.0	11.4	17/32	5W	SF	2	3/32	20.0
1C120	184.00	QDS07	12.0	12.4	11/16	6W	SF	2	1/16	21.7
1C130	240.00	QDS07	13.0	13.4	11/16	6A	SF	2	1/16	17.8
1C140	260.00	QDS07	14.0	14.4	11/16	6A	SF	2	1/16	22.2
1C160	280.00	QDS07	16.0	16.4	11/16	6A	SF	2	1/16	24.2
1C180	300.00	QDS07	18.0	18.4	11/16	6A	SF	2	1/16	32.1
1C200	320.00	QDS07	20.0	20.4	11/16	6A	SF	2	1/16	36.0
1C240	360.00	QDS07	24.0	24.4	11/16	6A	SF	2	1/16	47.0



TYPE 1



TYPE 5



TYPE 6

2 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 2-3/8 inches					Approx. Wt. (lbs)
					H	Type	B	L	E	
2C60	126.00	QDS06	6.0	6.4	1/16	1B	SF	2	5/16	8.0
2C70	132.00	QDS06	7.0	7.4	0	1B	SF	2	3/8	12.8
2C75	136.00	QDS06	7.5	7.9	0	1B	SF	2	3/8	14.9
2C80	144.00	QDS06	8.0	8.4	0	1B	SF	2	3/8	17.0
2C85	148.00	QDS06	8.5	8.9	0	1B	SF	2	3/8	19.2
2C90	152.00	QDS06	9.0	9.4	0	1W	SF	2	3/8	20.7
2C95	160.00	QDS06	9.5	9.9	0	1W	SF	2	3/8	22.9
2C100	176.00	QDS06	10.0	10.4	0	1W	SF	2	3/8	22.0
2C105	188.00	QDS06	10.5	10.9	0	1W	SF	2	3/8	23.4
2C110	200.00	QDS06	11.0	11.4	0	1W	SF	2	3/8	25.7
2C120	210.00	QDS06	12.0	12.4	1/4	6W	SF	2	5/8	28.6
2C130	250.00	QDS06	13.0	13.4	1/4	6A	SF	2	5/8	35.7
2C140	270.00	QDS06	14.0	14.4	1/4	6A	SF	2	5/8	40.2
2C160	290.00	QDS06	16.0	16.4	1/4	6A	SF	2	5/8	39.4
2C180	310.00	QDS06	18.0	18.4	1/4	6A	SF	2	5/8	47.3
2C200	340.00	QDS06	20.0	20.4	1/4	6A	SF	2	5/8	54.6
2C240	460.00	QDS06	24.0	24.4	1/4	6A	SF	2	5/8	63.0
2C270	550.00	QDS06	27.0	27.4	29/32	5A	F	3-5/8	11/32	93.1
2C300	620.00	QDS06	30.0	30.4	29/32	5A	F	3-5/8	11/32	94.0

P.D. for "C" Belts = O.D.

Type of sheave "T": A = arms; B = block; W = web

"C" SECTION

3 GROOVES

Dimensions


Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 3-3/8 inches					Approx. Wt. (lbs)
					H	Type	B	L	E	
3C50*	136.00	QDS06	5.0	5.4	5/16	1B	SD	1-13/16	1-1/4	8.5
3C50SK ¹	136.00	QDS06	5.0	5.4	13/16	11B	SK	1-7/8	2-5/16	8.0
3C56	138.00	QDS06	5.6	6.0	5/8	1B	SD	1-13/16	1-5/16	11.0
3C60	140.00	QDS06	6.0	6.4	1/16	1B	SF	2	1-5/16	10.2
3C70	144.00	QDS06	7.0	7.4	1/2	1B	SF	2	7/8	15.8
3C75	148.00	QDS06	7.5	7.9	1/2	1B	SF	2	7/8	18.2
3C80	156.00	QDS06	8.0	8.4	11/16	1B	E	2-5/8	1/16	20.3
3C85	176.00	QDS06	8.5	8.9	11/16	1B	E	2-5/8	1/16	24.1
3C90	188.00	QDS06	9.0	9.4	11/16	1B	E	2-5/8	1/16	27.0
3C95	200.00	QDS06	9.5	9.9	11/16	1W	E	2-5/8	1/16	29.8
3C100	220.00	QDS06	10.0	10.4	11/16	1W	E	2-5/8	1/16	33.8
3C105	230.00	QDS06	10.5	10.9	11/16	1W	E	2-5/8	1/16	36.3
3C110	240.00	QDS06	11.0	11.4	11/16	1W	E	2-5/8	1/16	37.5
3C120	250.00	QDS06	12.0	12.4	11/16	1W	E	2-5/8	1/16	43.7
3C130	290.00	QDS06	13.0	13.4	11/16	1A	E	2-5/8	1/16	44.8
3C140	320.00	QDS06	14.0	14.4	11/16	1A	E	2-5/8	1/16	49.8
3C160	330.00	QDS06	16.0	16.4	11/16	1A	E	2-5/8	1/16	58.3
3C180	350.00	QDS06	18.0	18.4	11/16	1A	E	2-5/8	1/16	63.1
3C200	400.00	QDS06	20.0	20.4	1/16	6A	E	2-5/8	13/16	81.0
3C240	480.00	QDS06	24.0	24.4	1/16	6A	E	2-5/8	13/16	84.0
3C270	580.00	QDS06	27.0	27.4	13/32	6A	F	3-5/8	5/32	115.5
3C300	640.00	QDS06	30.0	30.4	13/32	6A	F	3-5/8	5/32	118.0
3C360	980.00	QDS07	36.0	36.4	13/32	6A	F	3-5/8	5/32	187.0
3C440	1720.00	QDS07	44.0	44.4	13/32	6A	F	3-5/8	5/32	232.0
3C500	1920.00	QDS07	50.0	50.4	13/32	6A	F	3-5/8	5/32	290.0

P.D. for "C" Belts = O.D.


¹ Reverse mount only.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web



TYPE 1



TYPE 6



TYPE 11

Motor
Accessories

PT Components

Grinders

Baldor
Mod Express

ABB
Mod Express

ABB ATEX
Mod Express

Product
Index

"C" SECTION

4 GROOVES Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 4-3/8 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
4C50*	156.00	QDS06	5.0	5.4	5/8	1B	SD	1-13/16	1-15/16	10.6
4C50SK ¹	156.00	QDS06	5.0	5.4	13/16	11B	SK	1-7/8	3-5/16	10.0
4C56	158.00	QDS06	5.6	6.0	7/8	1B	SD	1-13/16	1-11/16	13.4
4C60	160.00	QDS06	6.0	6.4	1/16	1B	SF	2	2-5/16	12.1
4C70	164.00	QDS06	7.0	7.4	3/4	1B	SF	2	1-5/8	19.1
4C75	172.00	QDS06	7.5	7.9	3/4	1B	SF	2	1-5/8	21.8
4C80	196.00	QDS06	8.0	8.4	15/16	1B	E	2-5/8	13/16	23.7
4C85	208.00	QDS06	8.5	8.9	15/16	1B	E	2-5/8	13/16	27.7
4C90	224.00	QDS06	9.0	9.4	15/16	1B	E	2-5/8	13/16	31.3
4C95	228.00	QDS06	9.5	9.9	15/16	1B	E	2-5/8	13/16	35.0
4C100	240.00	QDS06	10.0	10.4	15/16	1B	E	2-5/8	13/16	39.6
4C105	260.00	QDS06	10.5	10.9	15/16	1W	E	2-5/8	13/16	42.4
4C110	272.00	QDS06	11.0	11.4	15/16	1W	E	2-5/8	13/16	43.4
4C120	300.00	QDS06	12.0	12.4	15/16	1W	E	2-5/8	13/16	49.0
4C130	336.00	QDS06	13.0	13.4	15/16	1A	E	2-5/8	13/16	54.0
4C140	364.00	QDS06	14.0	14.4	15/16	1A	E	2-5/8	13/16	56.5
4C160	420.00	QDS06	16.0	16.4	15/16	1A	E	2-5/8	13/16	66.0
4C180	430.00	QDS06	18.0	18.4	15/16	1A	E	2-5/8	13/16	73.4
4C200	450.00	QDS06	20.0	20.4	7/16	1A	E	2-5/8	1-5/16	87.0
4C240	560.00	QDS06	24.0	24.4	3/32	1A	F	3-5/8	21/32	114.0
4C270	660.00	QDS06	27.0	27.4	3/32	1A	F	3-5/8	21/32	140.5
4C300	760.00	QDS06	30.0	30.4	3/32	1A	F	3-5/8	21/32	141.0
4C360	1120.00	QDS07	36.0	36.4	5/32	1A	F	3-5/8	19/32	192.0
4C440	1800.00	QDS07	44.0	44.4	7/32	2A	J	4-1/2	11/32	286.0
4C500	2120.00	QDS07	50.0	50.4	7/32	2A	J	4-1/2	11/32	360.0


Type of sheave "T": A = arms; B = block; W = web

5 GROOVES Dimensions


Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 5-3/8 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
5C60SF	172.00	QDS06	6.0	6.4	1/16	1B	SF	2	3-5/16	14.3
5C70	176.00	QDS06	7.0	7.4	1-1/8	1B	SF	2	2-1/4	22.5
5C75	224.00	QDS06	7.5	7.9	1-1/8	1B	SF	2	2-1/4	25.0
5C80	236.00	QDS06	8.0	8.4	1-5/16	1B	E	2-5/8	1-7/16	27.3
5C85	252.00	QDS06	8.5	8.9	1-5/16	1B	E	2-5/8	1-7/16	32.2
5C90	256.00	QDS06	9.0	9.4	1-5/16	1B	E	2-5/8	1-7/16	35.9
5C95	262.00	QDS06	9.5	9.9	1-5/16	1B	E	2-5/8	1-7/16	39.9
5C100	276.00	QDS06	10.0	10.4	1-5/16	1W	E	2-5/8	1-7/16	41.6
5C105	296.00	QDS06	10.5	10.9	1-5/16	1W	E	2-5/8	1-7/16	43.7
5C110	332.00	QDS06	11.0	11.4	1-5/16	1W	E	2-5/8	1-7/16	48.7
5C120	336.00	QDS06	12.0	12.4	1-5/16	1W	E	2-5/8	1-7/16	54.2
5C130	376.00	QDS06	13.0	13.4	1-5/16	1A	E	2-5/8	1-7/16	53.6
5C140	380.00	QDS06	14.0	14.4	1-5/16	1A	E	2-5/8	1-7/16	60.2
5C160	430.00	QDS06	16.0	16.4	1-5/16	1A	E	2-5/8	1-7/16	72.2
5C180	480.00	QDS06	18.0	18.4	1-5/16	1A	E	2-5/8	1-7/16	90.9
5C200	600.00	QDS06	20.0	20.4	3/32	1A	F	3-5/8	1-21/32	109.7
5C240	640.00	QDS06	24.0	24.4	3/32	1A	F	3-5/8	1-21/32	130.5
5C270	760.00	QDS06	27.0	27.4	3/32	1A	F	3-5/8	1-21/32	149.0
5C300	840.00	QDS06	30.0	30.4	3/32	1A	F	3-5/8	1-21/32	174.0
5C360	1180.00	QDS07	36.0	36.4	7/32	1A	J	4-1/2	21/32	233.0
5C440	1940.00	QDS07	44.0	44.4	7/32	1A	J	4-1/2	21/32	338.0
5C500	2280.00	QDS07	50.0	50.4	7/32	1A	J	4-1/2	21/32	448.0

P.D. for "C" Belts = O.D. ¹ Reverse mount only. ² Mounting bolts are supplied by Baldor with these parts.


For more details and additional products, see complete Baldor•Maska® Product Catalog or www.baldor.com



TYPE 1



TYPE 2




TYPE 11


"C" SECTION

6 GROOVES Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 6-3/8 inches					
					H	Type	B	L	E	Approx.Wt (lbs)
6C60	244.00	QDS06	6.0	6.4	1-1/16	1B	SF	2	3-5/16	16.0
6C70	248.00	QDS06	7.0	7.4	1-1/8	1B	SF	2	3-1/4	25.7
6C75	264.00	QDS06	7.5	7.9	1-1/8	1B	SF	2	3-1/4	29.0
6C80	280.00	QDS06	8.0	8.4	1-5/16	1B	E	2-5/8	2-7/16	30.3
6C85	288.00	QDS06	8.5	8.9	1-5/16	1B	E	2-5/8	2-7/16	36.2
6C90	296.00	QDS06	9.0	9.4	1-7/32	1B	F	3-5/8	1-17/32	44.1
6C95	316.00	QDS06	9.5	9.9	1-7/32	1B	F	3-5/8	1-17/32	49.6
6C100	328.00	QDS06	10.0	10.4	1-7/32	1B	F	3-5/8	1-17/32	55.3
6C105	336.00	QDS06	10.5	10.9	1-7/32	1B	F	3-5/8	1-17/32	59.6
6C110	356.00	QDS06	11.0	11.4	1-7/32	1W	F	3-5/8	1-17/32	61.4
6C120	400.00	QDS06	12.0	12.4	1-7/32	1W	F	3-5/8	1-17/32	65.5
6C130	444.00	QDS06	13.0	13.4	1-7/32	1W	F	3-5/8	1-17/32	68.1
6C140	480.00	QDS06	14.0	14.4	1-7/32	1A	F	3-5/8	1-17/32	76.0
6C160	520.00	QDS06	16.0	16.4	1-7/32	1A	F	3-5/8	1-17/32	84.6
6C180	560.00	QDS06	18.0	18.4	1-7/32	1A	F	3-5/8	1-17/32	99.3
6C200	620.00	QDS06	20.0	20.4	23/32	1A	F	3-5/8	2-1/32	119.2
6C240	720.00	QDS06	24.0	24.4	23/32	1A	F	3-5/8	2-1/32	143.5
6C270	880.00	QDS06	27.0	27.4	5/32	1A	J	4-1/2	1-23/32	175.5
6C300	1040.00	QDS06	30.0	30.4	5/32	1A	J	4-1/2	1-23/32	205.0
6C360	1300.00	QDS07	36.0	36.4	7/32	1A	J	4-1/2	1-21/32	303.0
6C440	2040.00	QDS07	44.0	44.4	7/32	1A	J	4-1/2	1-21/32	410.0
6C500	2680.00	QDS07	50.0	50.4	11/32	2A	M°	6-3/4	23/32	510.0



TYPE 1



TYPE 2

8 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 8-3/8 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
8C70	320.00	QDS07	7.0	7.4	2-13/32	1B	SF	2	3-31/32	32.0
8C80	390.00	QDS07	8.0	8.4	2-3/16	1B	E	2-5/8	3-9/16	39.1
8C85	400.00	QDS07	8.5	8.9	2-3/16	1B	E	2-5/8	3-9/16	44.6
8C90	410.00	QDS07	9.0	9.4	2-3/32	1B	F	3-5/8	2-21/32	52.7
8C95	420.00	QDS07	9.5	9.9	2-3/32	1B	F	3-5/8	2-21/32	56.0
8C100	430.00	QDS07	10.0	10.4	2-3/32	1B	F	3-5/8	2-21/32	64.0
8C105	450.00	QDS07	10.5	10.9	2-3/32	1B	F	3-5/8	2-21/32	72.0
8C110	480.00	QDS07	11.0	11.4	2-3/32	1B	F	3-5/8	2-21/32	79.4
8C120	520.00	QDS07	12.0	12.4	2-3/32	1B	F	3-5/8	2-21/32	93.9
8C130	560.00	QDS07	13.0	13.4	2-3/32	1W	F	3-5/8	2-21/32	96.9
8C140	650.00	QDS07	14.0	14.4	2-3/32	1A	F	3-5/8	2-21/32	96.0
8C160	740.00	QDS07	16.0	16.4	2-3/32	1A	F	3-5/8	2-21/32	111.0
8C180	860.00	QDS07	18.0	18.4	2-3/32	1A	F	3-5/8	2-21/32	129.0
8C200	870.00	QDS07	20.0	20.4	5/32	1A	J	4-1/2	3-23/32	158.0
8C240	1020.00	QDS07	24.0	24.4	5/32	1A	J	4-1/2	3-23/32	173.0
8C270	1120.00	QDS07	27.0	27.4	5/32	1A	J	4-1/2	3-23/32	226.0
8C300	1280.00	QDS07	30.0	30.4	5/32	1A	J	4-1/2	3-23/32	272.0
8C360	1600.00	QDS07	36.0	36.4	9/32	1A	M°	6-3/4	1-11/32	370.0
8C440	2560.00	QDS07	44.0	44.4	9/32	1A	M°	6-3/4	1-11/32	479.0
8C500	3000.00	QDS07	50.0	50.4	9/32	1A	M°	6-3/4	1-11/32	570.0

P.D. for "C" Belts = O.D. Type of sheave "T": A = arms; B = block; W = web


* Note: M-N-P-W bushings are standard mounting only with these parts.

"C" SECTION

10 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 10-3/8 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
10C80	460.00	QDS07	8.0	8.4	2-3/16	1B	E	2-5/8	5-9/16	46.1
10C85	480.00	QDS07	8.5	8.9	2-3/16	1B	E	2-5/8	5-9/16	51.7
10C90	500.00	QDS07	9.0	9.4	2-5/32	1B	J	4-1/2	3-23/32	54.3
10C95	510.00	QDS07	9.5	9.9	2-5/32	1B	J	4-1/2	3-23/32	67.4
10C100	520.00	QDS07	10.0	10.4	2-5/32	1B	J	4-1/2	3-23/32	77.1
10C105	580.00	QDS07	10.5	10.9	2-5/32	1B	J	4-1/2	3-23/32	85.7
10C110	600.00	QDS07	11.0	11.4	2-5/32	1B	J	4-1/2	3-23/32	93.6
10C120	760.00	QDS07	12.0	12.4	2-5/32	1B	J	4-1/2	3-23/32	111.9
10C130	840.00	QDS07	13.0	13.4	2-5/32	1W	J	4-1/2	3-23/32	123.0
10C140	900.00	QDS07	14.0	14.4	2-5/32	1W	J	4-1/2	3-23/32	144.1
10C160	960.00	QDS07	16.0	16.4	2-5/32	1A	J	4-1/2	3-23/32	143.0
10C180	1080.00	QDS07	18.0	18.4	2-5/32	1A	J	4-1/2	3-23/32	151.0
10C200	1120.00	QDS07	20.0	20.4	2-5/32	1A	J	4-1/2	3-23/32	175.0
10C240	1360.00	QDS07	24.0	24.4	9/32	1A	M°	6-3/4	3-11/32	225.0
10C300	1760.00	QDS07	30.0	30.4	9/32	1A	M°	6-3/4	3-11/32	365.0
10C360	2560.00	QDS07	36.0	36.4	9/32	1A	M°	6-3/4	3-11/32	446.0
10C440	2800.00	QDS07	44.0	44.4	9/32	1A	M°	6-3/4	3-11/32	545.0
10C500	3500.00	QDS07	50.0	50.4	9/32	1A	M°	6-3/4	3-11/32	660.0



TYPE 1

12 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 12-3/8 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
12C90	700.00	QDS07	9.0	9.4	2-21/32	1B	J	4-1/2	5-7/32	62.0
12C95	720.00	QDS07	9.5	9.9	2-21/32	1B	J	4-1/2	5-7/32	76.5
12C100	740.00	QDS07	10.0	10.4	2-21/32	1B	J	4-1/2	5-7/32	86.7
12C105	760.00	QDS07	10.5	10.9	2-21/32	1B	J	4-1/2	5-7/32	95.3
12C110	780.00	QDS07	11.0	11.4	2-21/32	1B	J	4-1/2	5-7/32	105.0
12C120	800.00	QDS07	12.0	12.4	2-21/32	1B	J	4-1/2	5-7/32	118.8
12C130	920.00	QDS07	13.0	13.4	2-21/32	1W	J	4-1/2	5-7/32	145.6
12C140	1180.00	QDS07	14.0	14.4	2-21/32	1W	J	4-1/2	5-7/32	167.6
12C160	1360.00	QDS07	16.0	16.4	2-21/32	1A	J	4-1/2	5-7/32	151.0
12C180	1400.00	QDS07	18.0	18.4	2-21/32	1A	J	4-1/2	5-7/32	175.5
12C200	1480.00	QDS07	20.0	20.4	9/32	1A	M°	6-3/4	5-11/32	243.0
12C240	1520.00	QDS07	24.0	24.4	9/32	1A	M°	6-3/4	5-11/32	304.5
12C300	1780.00	QDS07	30.0	30.4	9/32	1A	M°	6-3/4	5-11/32	397.0
12C360	2640.00	QDS07	36.0	36.4	9/32	1A	M°	6-3/4	5-11/32	502.0
12C440	3200.00	QDS07	44.0	44.4	9/32	1A	M°	6-3/4	5-11/32	635.0
12C500	3900.00	QDS07	50.0	50.4	9/32	1A	M°	6-3/4	5-11/32	807.0

P.D. for "C" Belts = O.D.

° Note: M-N-P-W bushings are standard mounting only with these parts.


Type of sheave "T": A = arms; B = block; W = web

"D" SECTION


3 GROOVES

Dimensions


Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 4-5/8 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
3D120	560.00	QDS07	12.0	12.6	9/32	1W	F	3-5/8	23/32	64.0
3D130	600.00	QDS07	13.0	13.6	9/32	1W	F	3-5/8	23/32	72.0
3D135	620.00	QDS07	13.5	14.1	9/32	1W	F	3-5/8	23/32	76.0
3D140	640.00	QDS07	14.0	14.6	9/32	1W	F	3-5/8	23/32	79.0
3D145	680.00	QDS07	14.5	15.1	9/32	1W	F	3-5/8	23/32	84.0
3D150	720.00	QDS07	15.0	15.6	9/32	1W	F	3-5/8	23/32	89.0
3D155	740.00	QDS07	15.5	16.1	9/32	1W	F	3-5/8	23/32	94.0
3D160	760.00	QDS07	16.0	16.6	9/32	1A	F	3-5/8	23/32	96.0
3D180	800.00	QDS07	18.0	18.6	7/32	6A	J	4-1/2	11/32	115.0
3D220	960.00	QDS07	22.0	22.6	7/32	6A	J	4-1/2	11/32	141.0
3D270	1160.00	QDS07	27.0	27.6	7/32	6A	J	4-1/2	11/32	211.0
3D330	1640.00	QDS07	33.0	33.6	7/32	6A	J	4-1/2	11/32	231.0
3D400	2040.00	QDS07	40.0	40.6	7/32	6A	J	4-1/2	11/32	310.0



TYPE 1



TYPE 2



TYPE 6

4 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 6-1/16 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
4D120	600.00	QDS07	12.0	12.6	1-3/32	1W	F	3-5/8	1-11/32	77.0
4D130	640.00	QDS07	13.0	13.6	1-3/32	1W	F	3-5/8	1-11/32	85.0
4D135	660.00	QDS07	13.5	14.1	1-3/32	1W	F	3-5/8	1-11/32	90.0
4D140	680.00	QDS07	14.0	14.6	1-3/32	1W	F	3-5/8	1-11/32	95.0
4D145	780.00	QDS07	14.5	15.1	1-3/32	1W	F	3-5/8	1-11/32	100.0
4D150	800.00	QDS07	15.0	15.6	1-3/32	1W	F	3-5/8	1-11/32	107.0
4D155	820.00	QDS07	15.5	16.1	1-3/32	1W	F	3-5/8	1-11/32	112.0
4D160	840.00	QDS07	16.0	16.6	1-3/32	1A	F	3-5/8	1-11/32	119.0
4D170	940.00	QDS07	17.0	17.6	1-5/32	1A	J	4-1/2	13/32	127.0
4D180	960.00	QDS07	18.0	18.6	1-5/32	1A	J	4-1/2	13/32	131.0
4D200	980.00	QDS07	20.0	20.6	1-5/32	1A	J	4-1/2	13/32	147.0
4D220	1000.00	QDS07	22.0	22.6	5/32	1A	J	4-1/2	1-13/32	166.5
4D270	1280.00	QDS07	27.0	27.6	5/32	1A	J	4-1/2	1-13/32	238.0
4D330	2120.00	QDS07	33.0	33.6	9/32	2A	M°	6-3/4	31/32	308.0
4D400	2240.00	QDS07	40.0	40.6	9/32	2A	M°	6-3/4	31/32	385.0

P.D. for "D" Belts = O.D.

° Note: M-N-P-W bushings are standard mounting only with these parts.


Type of sheave "T": A = arms; B = block; W = web

"D" SECTION

5 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 7-1/2 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
5D120	780.00	QDS07	12.0	12.6	1-27/32	1W	F	3-5/8	2-1/32	89.0
5D130	800.00	QDS07	13.0	13.6	1-27/32	1W	F	3-5/8	2-1/32	100.0
5D135	820.00	QDS07	13.5	14.1	1-27/32	1W	F	3-5/8	2-1/32	105.0
5D140	860.00	QDS07	14.0	14.6	1-27/32	1W	F	3-5/8	2-1/32	111.0
5D145	920.00	QDS07	14.5	15.1	1-27/32	1W	F	3-5/8	2-1/32	118.0
5D150	940.00	QDS07	15.0	15.6	1-27/32	1W	F	3-5/8	2-1/32	125.0
5D155	960.00	QDS07	15.5	16.1	1-27/32	1W	F	3-5/8	2-1/32	131.0
5D160	980.00	QDS07	16.0	16.6	1-27/32	1A	F	3-5/8	2-1/32	131.4
5D170	1000.00	QDS07	17.0	17.6	1-29/32	1A	J	4-1/2	1-3/32	120.0
5D180	1020.00	QDS07	18.0	18.6	1-29/32	1A	J	4-1/2	1-3/32	151.0
5D200	1220.00	QDS07	20.0	20.6	5/32	1A	J	4-1/2	2-27/32	167.0
5D220	1420.00	QDS07	22.0	22.6	5/32	1A	J	4-1/2	2-27/32	198.0
5D270	1740.00	QDS07	27.0	27.6	9/32	1A	M ^a	6-3/4	15/32	289.0
5D330	2180.00	QDS07	33.0	33.6	9/32	1A	M ^a	6-3/4	15/32	372.5
5D400	2700.00	QDS07	40.0	40.6	9/32	1A	M ^a	6-3/4	15/32	521.0
5D480	3080.00	QDS07	48.0	48.6	9/32	1A	M ^a	6-3/4	15/32	598.0
5D580	4280.00	QDS07	58.0	58.6	9/32	1A	M ^a	6-3/4	15/32	817.0



TYPE 1

6 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 8-15/16 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
6D120	960.00	QDS07	12.0	12.6	1-29/32	1B	J	4-1/2	2-17/32	116.0
6D130	980.00	QDS07	13.0	13.6	1-29/32	1B	J	4-1/2	2-17/32	137.0
6D135	1000.00	QDS07	13.5	14.1	1-29/32	1B	J	4-1/2	2-17/32	147.0
6D140	1020.00	QDS07	14.0	14.6	1-29/32	1B	J	4-1/2	2-17/32	158.0
6D145	1040.00	QDS07	14.5	15.1	1-29/32	1B	J	4-1/2	2-17/32	170.0
6D150	1060.00	QDS07	15.0	15.6	1-29/32	1W	J	4-1/2	2-17/32	147.0
6D155	1080.00	QDS07	15.5	16.1	1-29/32	1W	J	4-1/2	2-17/32	153.0
6D160	1100.00	QDS07	16.0	16.6	1-29/32	1A	J	4-1/2	2-17/32	137.0
6D170	1120.00	QDS07	17.0	17.6	1-29/32	1A	J	4-1/2	2-17/32	153.0
6D180	1140.00	QDS07	18.0	18.6	1-29/32	1A	J	4-1/2	2-17/32	167.0
6D200	1480.00	QDS07	20.0	20.6	1-29/32	1A	J	4-1/2	2-17/32	195.5
6D220	1840.00	QDS07	22.0	22.6	9/32	1A	M ^a	6-3/4	1-29/32	269.0
6D270	1900.00	QDS07	27.0	27.6	9/32	1A	M ^a	6-3/4	1-29/32	300.0
6D330	2460.00	QDS07	33.0	33.6	9/32	1A	M ^a	6-3/4	1-29/32	408.0
6D400	2980.00	QDS07	40.0	40.6	9/32	1A	M ^a	6-3/4	1-29/32	557.0
6D480	3480.00	QDS07	48.0	48.6	9/32	1A	M ^a	6-3/4	1-29/32	664.0
6D580	4520.00	QDS07	58.0	58.6	3/16	1A	N ^a	8-1/8	5/8	925.0

P.D. for "D" Belts = O.D.

* Note: M-N-P-W bushings are standard mounting only with these parts.


Type of sheave "T": A = arms; B = block; W = web

"D" SECTION

8 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 11-13/16 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
8D120	1240.00	QDS07	12.0	12.6	2-5/32	1B	J	4-1/2	5-5/32	141.0
8D130	1260.00	QDS07	13.0	13.6	2-5/32	1B	J	4-1/2	5-5/32	163.0
8D135	1280.00	QDS07	13.5	14.1	2-5/32	1B	J	4-1/2	5-5/32	175.0
8D140	1320.00	QDS07	14.0	14.6	2-5/32	1B	J	4-1/2	5-5/32	187.0
8D145	1360.00	QDS07	14.5	15.1	2-5/32	1B	J	4-1/2	5-5/32	200.0
8D150	1380.00	QDS07	15.0	15.6	2-5/32	1W	J	4-1/2	5-5/32	183.0
8D155	1400.00	QDS07	15.5	16.1	2-5/32	1W	J	4-1/2	5-5/32	189.0
8D160	1560.00	QDS07	16.0	16.6	2-5/32	1W	J	4-1/2	5-5/32	197.0
8D170	1680.00	QDS07	17.0	17.6	2-5/32	1W	J	4-1/2	5-5/32	213.0
8D180	1820.00	QDS07	18.0	18.6	2-9/32	1W	M ^o	6-3/4	2-25/32	255.0
8D200	2000.00	QDS07	20.0	20.6	2-9/32	1W	M ^o	6-3/4	2-25/32	258.0
8D220	2160.00	QDS07	22.0	22.6	9/32	1A	M ^o	6-3/4	4-25/32	329.0
8D270	2660.00	QDS07	27.0	27.6	9/32	1A	M ^o	6-3/4	4-25/32	409.0
8D330	2840.00	QDS07	33.0	33.6	9/32	1A	M ^o	6-3/4	4-25/32	531.0
8D400	3720.00	QDS07	40.0	40.6	1/8	1A	N ^o	8-1/8	3-9/16	731.0
8D480	4320.00	QDS07	48.0	48.6	1/8	1A	N ^o	8-1/8	3-9/16	871.0
8D580	5280.00	QDS07	58.0	58.6	1/8	1A	N ^o	8-1/8	3-9/16	950.0



TYPE 1

10 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 14-11/16 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
10D120	1520.00	QDS07	12.0	12.6	2-9/32	1B	M ^o	6-3/4	5-21/32	166.0
10D130	1580.00	QDS07	13.0	13.6	2-9/32	1B	M ^o	6-3/4	5-21/32	207.0
10D135	1660.00	QDS07	13.5	14.1	2-9/32	1B	M ^o	6-3/4	5-21/32	224.0
10D140	1740.00	QDS07	14.0	14.6	2-9/32	1B	M ^o	6-3/4	5-21/32	242.0
10D145	1840.00	QDS07	14.5	15.1	2-9/32	1B	M ^o	6-3/4	5-21/32	260.0
10D150	1860.00	QDS07	15.0	15.6	2-9/32	1B	M ^o	6-3/4	5-21/32	279.0
10D155	1880.00	QDS07	15.5	16.1	2-9/32	1B	M ^o	6-3/4	5-21/32	298.0
10D160	1900.00	QDS07	16.0	16.6	2-9/32	1B	M ^o	6-3/4	5-21/32	318.0
10D170	2080.00	QDS07	17.0	17.6	2-9/32	1W	M ^o	6-3/4	5-21/32	307.0
10D180	2120.00	QDS07	18.0	18.6	2-9/32	1W	M ^o	6-3/4	5-21/32	293.0
10D200	2380.00	QDS07	20.0	20.6	2-9/32	1W	M ^o	6-3/4	5-21/32	351.0
10D220	2480.00	QDS07	22.0	22.6	1-9/32	1A	M ^o	6-3/4	6-21/32	390.0
10D270	2980.00	QDS07	27.0	27.6	1-9/32	1A	M ^o	6-3/4	6-21/32	497.0
10D330	3280.00	QDS07	33.0	33.6	1-11/32	1A	N ^o	8-1/8	5-7/32	672.0
10D400	4300.00	QDS07	40.0	40.6	1-11/32	1A	N ^o	8-1/8	5-7/32	857.0
10D480	5080.00	QDS07	48.0	48.6	3/16	1A	P ^o	9-3/8	5-1/8	1150.0
10D580	5880.00	QDS07	58.0	58.6	3/16	1A	P ^o	9-3/8	5-1/8	1570.0

P.D. for "D" Belts = O.D.

° Note: M-N-P-W bushings are standard mounting only with these parts.


Type of sheave "T": A = arms; B = block; W = web

"D" SECTION

12 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	Datum dia.	O.D.	F = 17-9/16 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
12D120	1720.00	QDS07	12.0	12.6	3-9/32	1B	M°	6-3/4	7-17/32	187.0
12D130	1800.00	QDS07	13.0	13.6	3-9/32	1B	M°	6-3/4	7-17/32	234.0
12D135	1860.00	QDS07	13.5	14.1	3-9/32	1B	M°	6-3/4	7-17/32	252.0
12D140	1880.00	QDS07	14.0	14.6	3-9/32	1B	M°	6-3/4	7-17/32	271.0
12D145	2000.00	QDS07	14.5	15.1	3-9/32	1B	M°	6-3/4	7-17/32	290.0
12D150	2120.00	QDS07	15.0	15.6	3-9/32	1B	M°	6-3/4	7-17/32	310.0
12D155	2180.00	QDS07	15.5	16.1	3-9/32	1B	M°	6-3/4	7-17/32	330.0
12D160	2200.00	QDS07	16.0	16.6	3-9/32	1B	M°	6-3/4	7-17/32	352.0
12D170	2320.00	QDS07	17.0	17.6	3-15/32	1W	M°	6-3/4	7-11/32	365.0
12D180	2420.00	QDS07	18.0	18.6	3-15/32	1W	M°	6-3/4	7-11/32	391.0
12D200	2760.00	QDS07	20.0	20.6	3-9/32	1W	M°	6-3/4	7-17/32	401.0
12D220	2980.00	QDS07	22.0	22.6	2-9/32	1A	M°	6-3/4	7-17/32	365.0
12D270	3640.00	QDS07	27.0	27.6	2-1/8	1A	N°	8-1/8	7-5/16	505.0
12D330	4380.00	QDS07	33.0	33.6	2-1/8	1A	N°	8-1/8	7-5/16	740.0
12D400	5040.00	QDS07	40.0	40.6	3/16	1A	P°	9-3/8	8	1010.0
12D480	6180.00	QDS07	48.0	48.6	3/16	1A	P°	9-3/8	8	1237.0
12D580	6760.00	QDS07	58.0	58.6	3/16	1A	P°	9-3/8	8	1693.0



TYPE 1

P.D. for "D" Belts = O.D.

*Note: M-N-P-W bushings are standard mounting only with these parts.

Type of sheave "T": A = arms; B = block; W = web

Narrow 3V, 5V & 8V



3V SECTION 1 GROOVE

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 11/16 up to 10.60 O.D. incl. and 13/16 inch thereafter					
					H	Type	B	L	E	Approx. Wt. (lbs)
1-3V2.20 ^{1*}	20.00	QDS08	2.20	2.15	1-1/64	10B	JA	1	45/64	0.8
1-3V2.35 ^{1*}	20.80	QDS08	2.35	2.30	1-1/64	10B	JA	1	45/64	0.85
1-3V2.50 ^{1*}	21.60	QDS08	2.50	2.45	1-1/64	10B	JA	1	45/64	0.92
1-3V2.65	22.40	QDS08	2.65	2.60	29/64	6B	JA	1	9/64	0.5
1-3V2.80	23.20	QDS08	2.80	2.75	29/64	6B	JA	1	9/64	0.7
1-3V3.00	24.00	QDS08	3.00	2.95	29/64	6B	JA	1	9/64	0.7
1-3V3.15	25.20	QDS08	3.15	3.10	29/64	6B	JA	1	9/64	0.7
1-3V3.35	26.40	QDS08	3.35	3.30	29/64	6B	JA	1	9/64	1.1
1-3V3.65	27.60	QDS08	3.65	3.60	5/8	11B	SH	1-1/4	1/16	1.3
1-3V4.12	28.80	QDS08	4.12	4.07	5/8	11B	SH	1-1/4	1/16	1.8
1-3V4.50	30.00	QDS08	4.50	4.45	5/8	11B	SH	1-1/4	1/16	2.3
1-3V4.75	32.00	QDS08	4.75	4.70	5/8	11B	SH	1-1/4	1/16	2.6
1-3V5.00	34.00	QDS08	5.00	4.95	5/8	11B	SH	1-1/4	1/16	2.9
1-3V5.30	36.00	QDS08	5.30	5.25	5/8	11B	SH	1-1/4	1/16	3.3
1-3V5.60	38.00	QDS08	5.60	5.55	5/8	11B	SH	1-1/4	1/16	3.7
1-3V6.00	40.00	QDS08	6.00	5.95	5/8	11W	SH	1-1/4	1/16	4.0
1-3V6.50	44.00	QDS08	6.50	6.45	5/8	11W	SH	1-1/4	1/16	4.8
1-3V6.90	52.00	QDS08	6.90	6.85	5/8	11W	SH	1-1/4	1/16	5.5
1-3V8.00	60.00	QDS08	8.00	7.95	11/16	11A	SDS	1-5/16	1/16	5.7
1-3V10.60	100.00	QDS08	10.60	10.55	11/16	11A	SDS	1-5/16	1/16	8.7
1-3V14.00	120.00	QDS08	14.00	13.95	13/16	5A	SK	1-7/8	1/4	16.0
1-3V19.00	200.00	QDS08	19.00	18.95	29/32	3A	SK	1-7/8	5/32	23.9

P.D. for "3V" Belts = O.D.

¹ Reverse mount only.

* Mounting bolts are supplied by Baldor with these parts.

Type of sheave "T": A = arms; B = block; W = web

Features: Complete line in stock, including larger models. Higher HP than classical model; compact, light-weight drives. Designed for use with QD bushing.


3V model from 1-6; 8; 10 grooves.

5V model from 2-6; 8; 10 grooves.


8V model from 4-6; 8; 10; 12 grooves.

Note: DO NOT use these gray cast iron sheaves with rim speeds in excess of 6500 feet per minute.


How to order: Example: 5-5V11.30; 5 = Number of grooves. 5V = Sheave section ("5V"). 11.30 = outside diameter (11.30")




TYPE 3




TYPE 5



TYPE 6



TYPE 10



TYPE 11

3V SECTION

2 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 1-3/32 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
2-3V2.20 ^{1*}	28.80	QDS09	2.20	2.15	1-1/64	10B	JA	1	1-7/64	0.9
2-3V2.35 ^{1*}	29.60	QDS08	2.35	2.30	1-1/64	10B	JA	1	1-7/64	1.0
2-3V2.50 ^{1*}	30.40	QDS08	2.50	2.45	1-1/64	10B	JA	1	1-7/64	1.1
2-3V2.65 ²	31.20	QDS08	2.65	2.60	25/64	6B	JA	1	31/64	0.8
2-3V2.80 ²	32.00	QDS08	2.80	2.75	25/64	6B	JA	1	31/64	1.0
2-3V3.00 ²	32.80	QDS08	3.00	2.95	25/64	6B	JA	1	31/64	1.2
2-3V3.15 ²	34.00	QDS08	3.15	3.10	25/64	6B	JA	1	31/64	1.2
2-3V3.35 ²	35.20	QDS08	3.35	3.30	1/2	6B	SH	1-1/4	11/32	1.4
2-3V3.65 ²	36.40	QDS08	3.65	3.60	1/2	6B	SH	1-1/4	11/32	1.7
2-3V4.12	40.00	QDS08	4.12	4.07	9/32	6B	SH	1-1/4	1/8	2.3
2-3V4.50	44.00	QDS08	4.50	4.45	9/32	6B	SH	1-1/4	1/8	2.9
2-3V4.75	48.00	QDS08	4.75	4.70	9/32	6B	SH	1-1/4	1/8	3.3
2-3V5.00	52.00	QDS08	5.00	4.95	9/32	6B	SH	1-1/4	1/8	3.7
2-3V5.30	54.00	QDS08	5.30	5.25	9/32	6B	SH	1-1/4	1/8	4.2
2-3V5.60	56.00	QDS08	5.60	5.55	9/32	6B	SH	1-1/4	1/8	4.7
2-3V6.00	58.00	QDS08	6.00	5.95	9/32	6W	SH	1-1/4	1/8	5.1
2-3V6.50	64.00	QDS08	6.50	6.45	3/8	6W	SDS	1-5/16	5/32	5.7
2-3V6.90	70.00	QDS08	6.90	6.85	3/8	6W	SDS	1-5/16	5/32	6.5
2-3V8.00	72.00	QDS08	8.00	7.95	3/8	6A	SDS	1-5/16	5/32	6.5
2-3V10.60	110.00	QDS08	10.60	10.55	5/8	5A	SK	1-7/8	5/32	11.7
2-3V14.00	174.00	QDS08	14.00	13.95	5/8	5A	SK	1-7/8	5/32	17.6
2-3V19.00	204.00	QDS08	19.00	18.95	13/16	11A	SK	1-7/8	1/32	26.3
2-3V25.00	360.00	QDS08	25.00	24.95	13/16	5A	SF	2	3/32	34.5


P.D. for "3V" Belts = O.D

¹ Reverse mount only.


² This sheave can only be reverse mounted with standard bushing bolts. Specials bolts (not provided by Baldor) are required for standard mount.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web




TYPE 5



TYPE 6



TYPE 10



TYPE 11

3V SECTION

3 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 1-1/2 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
3-3V2.65 ²	36.80	QDS08	2.65	2.60	25/64	6B	JA	1	57/64	1.0
3-3V2.80 ²	37.60	QDS08	2.80	2.75	25/64	6B	JA	1	57/64	1.3
+3-3V3.00 ^{1*}	38.80	QDS08	3.00	2.95	1-1/32	10B	SH	1-1/4	1-9/32	1.8
+3-3V3.15 ^{1*}	40.00	QDS08	3.15	3.10	1	10B	SH	1-1/4	1-1/4	2.0
3-3V3.35 ²	41.20	QDS08	3.35	3.30	9/16	6B	SH	1-1/4	13/16	1.7
3-3V3.65 ²	42.40	QDS08	3.65	3.60	9/16	6B	SH	1-1/4	13/16	2.3
3-3V4.12	44.00	QDS08	4.12	4.07	0	4B	SH	1-1/4	1/4	2.6
3-3V4.50	50.00	QDS08	4.50	4.45	0	4B	SDS	1-5/16	3/16	3.1
3-3V4.75	54.00	QDS08	4.75	4.70	0	4B	SDS	1-5/16	3/16	3.6
3-3V5.00	58.00	QDS08	5.00	4.95	0	4B	SDS	1-5/16	3/16	4.2
3-3V5.30	60.00	QDS08	5.30	5.25	0	4B	SDS	1-5/16	3/16	4.8
3-3V5.60	62.00	QDS08	5.60	5.55	0	4B	SDS	1-5/16	3/16	5.3
3-3V6.00	66.00	QDS08	6.00	5.95	0	4B	SDS	1-5/16	3/16	6.2
3-3V6.50	68.00	QDS08	6.50	6.45	0	4W	SDS	1-5/16	3/16	6.6
3-3V6.90	80.00	QDS08	6.90	6.85	0	4W	SDS	1-5/16	3/16	7.3
3-3V8.00	86.00	QDS08	8.00	7.95	5/8	6A	SK	1-7/8	1/4	9.8
3-3V10.60	126.00	QDS08	10.60	10.55	5/8	6A	SK	1-7/8	1/4	14.1
3-3V14.00	184.00	QDS08	14.00	13.95	5/8	6A	SK	1-7/8	1/4	18.9
3-3V19.00	216.00	QDS08	19.00	18.95	13/16	11A	SF	2	5/16	34.1
3-3V25.00	400.00	QDS08	25.00	24.95	13/16	11A	SF	2	5/16	38.6
3-3V33.50	720.00	QDS09	33.50	33.45	23/32	6A	SF	2	7/32	79.4

4 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 1-29/32 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
4-3V2.65 ²	42.40	QDS08	2.65	2.60	25/64	6B	JA	1	1-19/64	1.3
4-3V2.80 ²	42.80	QDS08	2.80	2.75	25/64	6B	JA	1	1-19/64	1.6
4-3V3.00 ^{1*}	43.20	QDS08	3.00	2.95	1-1/32	10B	SH	1-1/4	1-11/16	2.1
4-3V3.15 ^{1*}	44.80	QDS08	3.15	3.10	1	10B	SH	1-1/4	1-21/32	2.4
4-3V3.35 ²	46.40	QDS08	3.35	3.30	1/2	6B	SH	1-1/4	1-5/32	2.1
4-3V3.65 ²	48.00	QDS08	3.65	3.60	1/2	6B	SH	1-1/4	1-5/32	2.9
4-3V4.12	50.00	QDS08	4.12	4.07	3/16	1B	SH	1-1/4	15/32	3.0
4-3V4.50	52.00	QDS08	4.50	4.45	3/16	1B	SDS	1-5/16	13/32	3.5
4-3V4.75	56.00	QDS08	4.75	4.70	1/8	1B	SDS	1-5/16	15/32	4.2
4-3V5.00	60.00	QDS08	5.00	4.95	1/8	1B	SDS	1-5/16	15/32	5.0
4-3V5.30	64.00	QDS08	5.30	5.25	1/8	1B	SDS	1-5/16	15/32	5.6
4-3V5.60	66.00	QDS08	5.60	5.55	1/8	1B	SDS	1-5/16	15/32	6.3
4-3V6.00	70.00	QDS08	6.00	5.95	1/4	6B	SK	1-7/8	9/32	7.8
4-3V6.50	72.00	QDS08	6.50	6.45	1/4	6B	SK	1-7/8	9/32	9.5
4-3V6.90	82.00	QDS08	6.90	6.85	1/4	6B	SK	1-7/8	9/32	11.1
4-3V8.00	88.00	QDS08	8.00	7.95	1/4	6A	SK	1-7/8	9/32	11.3
4-3V10.60	128.00	QDS08	10.60	10.55	1/4	6A	SK	1-7/8	9/32	15.9
4-3V14.00	196.00	QDS08	14.00	13.95	1/4	6A	SK	1-7/8	9/32	24.5
4-3V19.00	252.00	QDS08	19.00	18.95	1/16	5A	SF	2	1/32	41.2
4-3V25.00	412.00	QDS08	25.00	24.95	7/16	6A	SF	2	11/32	51.1
4-3V33.50	780.00	QDS09	33.50	33.45	25/32	6A	E	2-5/8	1/16	94.1

P.D. for "3V" Belts = O.D.

* For 3-3V3.00: F=1.912"

* For 3-3V3.15: F=1 7/8"


¹ Reverse mount only.

² This sheave can only be reverse mounted with standard bushing bolts.


Specials bolts (not provided by Baldor) are required for standard mount.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web




TYPE 1




TYPE 4




TYPE 5



TYPE 6



TYPE 10



TYPE 11

Motor
Accessories

PT Components

Grinders

Baldor
Mod Express

ABB
Mod Express

ABB ATEX
Mod Express


Product
Index

3V SECTION


5 GROOVES

Dimensions


Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 2-5/16 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
5-3V4.75	62.00	QDS08	4.75	4.70	1/8	1B	SDS	1-5/16	7/8	4.8
5-3V5.00	68.00	QDS08	5.00	4.95	1/8	1B	SDS	1-5/16	7/8	5.9
5-3V5.30	70.00	QDS08	5.30	5.25	1/16	1B	SK	1-7/8	3/8	6.0
5-3V5.60	76.00	QDS08	5.60	5.55	1/32	1B	SK	1-7/8	13/32	7.4
5-3V6.00	78.00	QDS08	6.00	5.95	1/16	1B	SK	1-7/8	3/8	8.7
5-3V6.50	80.00	QDS08	6.50	6.45	1/16	1B	SK	1-7/8	3/8	10.7
5-3V6.90	88.00	QDS08	6.90	6.85	1/32	1B	SK	1-7/8	13/32	12.1
5-3V8.00	94.00	QDS08	8.00	7.95	1/16	1W	SK	1-7/8	3/8	14.8
5-3V10.60	130.00	QDS08	10.60	10.55	5/32	1A	SK	1-7/8	9/32	19.3
5-3V14.00	232.00	QDS08	14.00	13.95	3/32	6A	SF	2	13/32	27.8
5-3V19.00	292.00	QDS08	19.00	18.95	3/32	1A	SF	2	7/32	42.9
5-3V25.00	436.00	QDS08	25.00	24.95	7/16	6A	E	2-5/8	1/8	61.4
5-3V33.50	850.00	QDS09	33.50	33.45	3/8	6A	E	2-5/8	1/16	107.0



TYPE 1



TYPE 6



TYPE 11

6 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 2-23/32 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
6-3V4.75 ¹ *	84.00	QDS09	4.75	4.70	13/16	11B	SK	1-7/8	1-21/32	5.9
6-3V5.00 ¹	86.00	QDS09	5.00	4.95	13/16	11B	SK	1-7/8	1-21/32	7.2
6-3V5.30	88.00	QDS09	5.30	5.25	15/32	1B	SK	1-7/8	3/8	6.5
6-3V5.60	90.00	QDS09	5.60	5.55	7/16	1B	SK	1-7/8	13/32	8.3
6-3V6.00	92.00	QDS09	6.00	5.95	7/16	1B	SK	1-7/8	13/32	9.7
6-3V6.50	94.00	QDS09	6.50	6.45	1/2	1B	SK	1-7/8	11/32	11.6
6-3V6.90	112.00	QDS09	6.90	6.85	7/16	1B	SK	1-7/8	13/32	13.2
6-3V8.00	124.00	QDS09	8.00	7.95	1/16	1W	SK	1-7/8	25/32	16.2
6-3V10.60	144.00	QDS09	10.60	10.55	5/32	1A	SF	2	9/16	22.1
6-3V14.00	248.00	QDS09	14.00	13.95	3/32	1A	SF	2	5/8	32.4
6-3V19.00	308.00	QDS09	19.00	18.95	1/32	6A	E	2-5/8	1/8	47.5
6-3V25.00	452.00	QDS09	25.00	24.95	1/32	6A	E	2-5/8	1/8	75.0
6-3V33.50	900.00	QDS09	33.50	33.45	1/32	1A	E	2-5/8	1/16	122.5

P.D. for "3V" Belts = O.D.

¹ Reverse mount only.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web

3V SECTION


8 GROOVES

Dimensions


Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 3-17/32 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
8-3V4.75 ¹	106.00	QDS09	4.75	4.70	13/16	11B	SK	1-7/8	2-15/32	7.2
8-3V5.00 ¹	110.00	QDS09	5.00	4.95	13/16	11B	SK	1-7/8	2-15/32	8.9
8-3V5.30	124.00	QDS09	5.30	5.25	7/16	1B	SK	1-7/8	1-7/32	7.7
8-3V5.60	126.00	QDS09	5.60	5.55	7/16	1B	SK	1-7/8	1-7/32	10.0
8-3V6.00	128.00	QDS09	6.00	5.95	7/16	1B	SK	1-7/8	1-7/32	11.7
8-3V6.50	130.00	QDS09	6.50	6.45	7/16	1B	SK	1-7/8	1-7/32	13.6
8-3V6.90	132.00	QDS09	6.90	6.85	7/16	1B	SK	1-7/8	1-7/32	15.3
8-3V8.00	148.00	QDS09	8.00	7.95	5/16	1W	SF	2	1-7/32	19.6
8-3V10.60	210.00	QDS09	10.60	10.55	5/32	1A	SF	2	1-3/8	25.8
8-3V14.00	284.00	QDS09	14.00	13.95	1/8	6A	E	2-5/8	1-1/32	40.8
8-3V19.00	444.00	QDS09	19.00	18.95	1/8	6A	E	2-5/8	1-1/32	61.7
8-3V25.00	520.00	QDS09	25.00	24.95	3/16	6A	E	2-5/8	1-3/32	94.0
8-3V33.50	980.00	QDS09	33.50	33.45	15/32	6A	F	3-5/8	3/8	153.0




TYPE 1



TYPE 4



TYPE 6



TYPE 11

10 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 4-11/32 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
10-3V4.75 ¹	126.00	QDS09	4.75	4.70	13/16	11B	SK	1-7/8	3-9/32	8.7
10-3V5.00 ¹	128.00	QDS09	5.00	4.95	13/16	11B	SK	1-7/8	3-9/32	10.7
10-3V5.30	130.00	QDS09	5.30	5.25	9/16	1B	SK	1-7/8	1-29/32	9.8
10-3V5.60	132.00	QDS09	5.60	5.55	9/16	1B	SK	1-7/8	1-29/32	11.6
10-3V6.00	134.00	QDS09	6.00	5.95	9/16	1B	SK	1-7/8	1-29/32	13.6
10-3V6.50	144.00	QDS09	6.50	6.45	9/16	1B	SK	1-7/8	1-29/32	15.8
10-3V6.90	146.00	QDS09	6.90	6.85	9/16	1B	SK	1-7/8	1-29/32	17.5
10-3V8.00	194.00	QDS09	8.00	7.95	11/16	1W	SF	2	1-21/32	21.8
10-3V10.60	250.00	QDS09	10.60	10.55	0	4W	E	2-5/8	1-23/32	36.3
10-3V14.00	320.00	QDS09	14.00	13.95	0	4A	E	2-5/8	1-23/32	49.9
10-3V19.00	472.00	QDS09	19.00	18.95	0	4A	E	2-5/8	1-23/32	74.0
10-3V25.00	596.00	QDS09	25.00	24.95	1/16	6A	F	3-5/8	25/32	105.0
10-3V33.50	1100.00	QDS09	33.50	33.45	1/16	6A	F	3-5/8	25/32	180.0

P.D. for "3V" Belts = O.D.

¹ Reverse mount only.

Type of sheave "T": A = arms; B = block; W = web

5V SECTION

2 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 1-11/16 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
2-5V4.40 ²	73.00	QDS08	4.40	4.30	15/32	6B	SH	1-1/4	29/32	4.0
2-5V4.65 ^{1*}	79.00	QDS08	4.65	4.55	11/16	11B	SDS	1-5/16	1-1/16	4.0
2-5V4.90	85.00	QDS08	4.90	4.80	7/32	4B	SDS	1-5/16	3/8	3.8
2-5V5.20	91.00	QDS08	5.20	5.10	0	4B	SDS	1-5/16	3/8	4.8
2-5V5.50	97.00	QDS08	5.50	5.40	0	4B	SDS	1-5/16	3/8	5.5
2-5V5.90	103.00	QDS08	5.90	5.80	0	4B	SDS	1-5/16	3/8	6.5
2-5V6.30	109.00	QDS08	6.30	6.20	7/16	6B	SK	1-7/8	1/4	7.7
2-5V6.70	115.00	QDS08	6.70	6.60	7/16	6B	SK	1-7/8	1/4	9.3
2-5V7.10	120.00	QDS08	7.10	7.00	3/8	6B	SK	1-7/8	3/16	10.6
2-5V7.50	122.00	QDS08	7.50	7.40	3/8	6B	SK	1-7/8	3/16	12.0
2-5V8.00	124.00	QDS08	8.00	7.90	3/8	6B	SK	1-7/8	3/16	14.1
2-5V8.50	128.00	QDS08	8.50	8.40	3/8	6B	SK	1-7/8	3/16	16.3
2-5V9.00	136.00	QDS08	9.00	8.90	3/8	6B	SK	1-7/8	3/16	18.3
2-5V9.25	144.00	QDS08	9.25	9.15	3/8	6W	SK	1-7/8	3/16	16.5
2-5V9.75	148.00	QDS08	9.75	9.65	3/8	6W	SK	1-7/8	3/16	17.7
2-5V10.30	152.00	QDS08	10.30	10.20	3/8	6W	SK	1-7/8	3/16	18.3
2-5V10.90	156.00	QDS08	10.90	10.80	3/8	6W	SK	1-7/8	3/16	20.7
2-5V11.30	160.00	QDS08	11.30	11.20	3/8	6A	SK	1-7/8	3/16	16.9
2-5V11.80	162.00	QDS08	11.80	11.70	3/8	6A	SK	1-7/8	3/16	18.4
2-5V12.50	164.00	QDS08	12.50	12.40	3/8	6A	SF	2	1/16	20.8
2-5V13.20	176.00	QDS08	13.20	13.10	3/8	6A	SF	2	1/16	22.2
2-5V14.00	230.00	QDS08	14.00	13.90	3/8	6A	SF	2	1/16	23.1
2-5V15.00	234.00	QDS08	15.00	14.90	3/8	6A	SF	2	1/16	25.3
2-5V16.00	252.00	QDS08	16.00	15.90	3/8	6A	SF	2	1/16	26.9
2-5V18.70	300.00	QDS08	18.70	18.60	3/8	6A	SF	2	1/16	34.7
2-5V21.20	416.00	QDS08	21.20	21.10	3/8	6A	SF	2	1/16	46.7
2-5V23.60	480.00	QDS08	23.60	23.50	5/16	5A	E	2-5/8	5/8	53.2
2-5V28.00	520.00	QDS08	28.00	27.90	5/16	5A	E	2-5/8	5/8	66.1

P.D. for "5V" Belts = O.D.


¹ Reverse mount only.

² This sheave can only be reverse mounted with standard bushing bolts.


Specials bolts (not provided by Baldor) are required for standard mount.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web




TYPE 4



TYPE 5



TYPE 6



TYPE 11

5V SECTION

3 GROOVES

Dimensions


Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 2-3/8 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
3-5V4.40 ^{1*}	79.00	QDS08	4.40	4.30	11/16	11B	SDS	1-5/16	1-3/4	4.6
3-5V4.65 ^{1*}	85.00	QDS08	4.65	4.55	11/16	11B	SDS	1-5/16	1-3/4	5.2
3-5V4.90 [*]	91.00	QDS08	4.90	4.80	3/8	1B	SDS	1-5/16	11/16	5.0
3-5V5.20	97.00	QDS08	5.20	5.10	3/8	1B	SDS	1-5/16	11/16	5.8
3-5V5.50	103.00	QDS08	5.50	5.40	5/16	1B	SDS	1-5/16	3/4	6.3
3-5V5.90	109.00	QDS08	5.90	5.80	5/16	1B	SDS	1-5/16	3/4	8.4
3-5V6.30	115.00	QDS08	6.30	6.20	1/4	1B	SK	1-7/8	1/4	9.6
3-5V6.70	121.00	QDS08	6.70	6.60	1/4	1B	SK	1-7/8	1/4	11.9
3-5V7.10	128.00	QDS08	7.10	7.00	3/16	1B	SF	2	3/16	12.3
3-5V7.50	134.00	QDS08	7.50	7.40	3/16	1B	SF	2	3/16	13.8
3-5V8.00	142.00	QDS08	8.00	7.90	3/16	1B	SF	2	3/16	16.2
3-5V8.50	146.00	QDS08	8.50	8.40	1/16	6B	SF	2	7/16	18.1
3-5V9.00	150.00	QDS08	9.00	8.90	1/16	6B	SF	2	7/16	20.7
3-5V9.25	156.00	QDS08	9.25	9.15	1/16	6W	SF	2	7/16	20.3
3-5V9.75	162.00	QDS08	9.75	9.65	1/16	6W	SF	2	7/16	20.4
3-5V10.30	172.00	QDS08	10.30	10.20	1/16	6W	SF	2	7/16	21.6
3-5V10.90	176.00	QDS08	10.90	10.80	1/16	6W	SF	2	7/16	23.3
3-5V11.30	180.00	QDS08	11.30	11.20	1/16	6A	SF	2	7/16	22.8
3-5V11.80	194.00	QDS08	11.80	11.70	1/16	6A	SF	2	7/16	24.9
3-5V12.50	202.00	QDS08	12.50	12.40	11/16	6A	E	2-5/8	7/16	30.7
3-5V13.20	212.00	QDS08	13.20	13.10	11/16	6A	E	2-5/8	7/16	32.5
3-5V14.00	258.00	QDS08	14.00	13.90	11/16	6A	E	2-5/8	7/16	35.8
3-5V15.00	274.00	QDS08	15.00	14.90	11/16	6A	E	2-5/8	7/16	38.2
3-5V16.00	282.00	QDS08	16.00	15.90	11/16	6A	E	2-5/8	7/16	40.9
3-5V18.70	328.00	QDS08	18.70	18.60	5/16	6A	E	2-5/8	1/16	46.9
3-5V21.20	440.00	QDS08	21.20	21.10	11/16	6A	E	2-5/8	7/16	62.0
3-5V23.60	500.00	QDS08	23.60	23.50	11/32	6A	E	2-5/8	3/32	60.6
3-5V28.00	540.00	QDS08	28.00	27.90	5/16	6A	E	2-5/8	1/16	101.0
3-5V31.50	920.00	QDS10	31.50	31.40	31/32	5A	F	3-5/8	9/32	113.0
3-5V37.50	1180.00	QDS10	37.50	37.40	31/32	5A	F	3-5/8	9/32	155.0
3-5V50.00	1780.00	QDS10	50.00	49.90	31/32	5A	F	3-5/8	9/32	220.0

P.D. for "5V" Belts = O.D.


¹ Reverse mount only.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web




TYPE 1



TYPE 5



TYPE 6



TYPE 11

Motor
Accessories

PT Components

Grinders

Baldor
Mod Express

ABB
Mod Express

ABB ATEX
Mod Express

Product
Index

5V SECTION

4 GROOVES

Dimensions


Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 3-1/16 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
4-5V4.40 ^{1*}	92.00	QDS08	4.40	4.30	11/16	11B	SD	1-13/16	1-15/16	5.9
4-5V4.65 ^{1*}	98.00	QDS08	4.65	4.55	11/16	11B	SD	1-13/16	1-15/16	6.7
4-5V4.90*	104.00	QDS08	4.90	4.80	5/8	1B	SD	1-13/16	5/8	6.6
4-5V5.20	110.00	QDS08	5.20	5.10	5/8	1B	SD	1-13/16	5/8	7.8
4-5V5.50	116.00	QDS08	5.50	5.40	5/8	1B	SD	1-13/16	5/8	9.6
4-5V5.90	122.00	QDS08	5.90	5.80	5/8	1B	SD	1-13/16	5/8	11.0
4-5V6.30	128.00	QDS08	6.30	6.20	1/2	1B	SK	1-7/8	11/16	11.7
4-5V6.70	134.00	QDS08	6.70	6.60	1/2	1B	SK	1-7/8	11/16	14.5
4-5V7.10	140.00	QDS08	7.10	7.00	1/4	1B	SF	2	13/16	14.5
4-5V7.50	148.00	QDS08	7.50	7.40	1/4	1B	SF	2	13/16	16.3
4-5V8.00	156.00	QDS08	8.00	7.90	3/8	1B	E	2-5/8	1/16	17.9
4-5V8.50	162.00	QDS08	8.50	8.40	3/8	1B	E	2-5/8	1/16	21.7
4-5V9.00	164.00	QDS08	9.00	8.90	3/8	1B	E	2-5/8	1/16	24.4
4-5V9.25	168.00	QDS08	9.25	9.15	3/8	1B	E	2-5/8	1/16	26.2
4-5V9.75	196.00	QDS08	9.75	9.65	3/8	1B	E	2-5/8	1/16	29.6
4-5V10.30	200.00	QDS08	10.30	10.20	0	4W	E	2-5/8	7/16	29.8
4-5V10.90	206.00	QDS08	10.90	10.80	0	4W	E	2-5/8	7/16	32.4
4-5V11.30	224.00	QDS08	11.30	11.20	3/8	1W	E	2-5/8	1/16	35.5
4-5V11.80	226.00	QDS08	11.80	11.70	0	4W	E	2-5/8	7/16	32.7
4-5V12.50	234.00	QDS08	12.50	12.40	3/8	1A	E	2-5/8	1/16	35.7
4-5V13.20	256.00	QDS08	13.20	13.10	0	4A	E	2-5/8	7/16	37.2
4-5V14.00	290.00	QDS08	14.00	13.90	0	4A	E	2-5/8	7/16	41.1
4-5V15.00	320.00	QDS08	15.00	14.90	0	4A	E	2-5/8	7/16	44.6
4-5V16.00	340.00	QDS08	16.00	15.90	0	4A	E	2-5/8	7/16	49.9
4-5V18.70	380.00	QDS08	18.70	18.60	3/16	1A	E	2-5/8	1/4	59.2
4-5V21.20	512.00	QDS08	21.20	21.10	3/16	1A	E	2-5/8	1/4	65.0
4-5V23.60	546.00	QDS08	23.60	23.50	21/32	6A	F	3-5/8	3/32	84.8
4-5V28.00	620.00	QDS08	28.00	27.90	21/32	6A	F	3-5/8	3/32	112.6
4-5V31.50	970.00	QDS10	31.50	31.40	11/32	5A	F	3-5/8	7/32	140.9
4-5V37.50	1240.00	QDS10	37.50	37.40	21/32	6A	F	3-5/8	3/32	172.0
4-5V50.00	1880.00	QDS10	50.00	49.90	15/16	5A	J	4-1/2	1/2	269.0

P.D. for "5V" Belts = O.D.


¹ Reverse mount only.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web




TYPE 1




TYPE 4



TYPE 5



TYPE 6



TYPE 11

5V SECTION

5 GROOVES

Dimensions


Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 3-3/4 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
5-5V4.40 ¹ *	104.00	QDS08	4.40	4.30	11/16	11B	SD	1-13/16	2-5/8	6.3
5-5V4.65 ¹ *	110.00	QDS08	4.65	4.55	11/16	11B	SD	1-13/16	2-5/8	7.0
5-5V4.90*	116.00	QDS08	4.90	4.80	5/8	1B	SD	1-13/16	1-5/16	7.9
5-5V5.20	122.00	QDS08	5.20	5.10	5/8	1B	SD	1-13/16	1-5/16	9.7
5-5V5.50	128.00	QDS08	5.50	5.40	5/8	1B	SD	1-13/16	1-5/16	10.9
5-5V5.90	134.00	QDS08	5.90	5.80	1/2	1B	SK	1-7/8	1-3/8	11.2
5-5V6.30	140.00	QDS08	6.30	6.20	1/2	1B	SK	1-7/8	1-3/8	12.2
5-5V6.70	146.00	QDS08	6.70	6.60	1/2	1B	SF	2	1-1/4	13.2
5-5V7.10	156.00	QDS08	7.10	7.00	9/16	1B	SF	2	1-3/16	16.7
5-5V7.50	174.00	QDS08	7.50	7.40	9/16	1B	SF	2	1-3/16	18.5
5-5V8.00	184.00	QDS08	8.00	7.90	5/16	1B	E	2-5/8	13/16	20.0
5-5V8.50	190.00	QDS08	8.50	8.40	5/16	1B	E	2-5/8	13/16	24.4
5-5V9.00	198.00	QDS08	9.00	8.90	5/16	1B	E	2-5/8	13/16	27.4
5-5V9.25	202.00	QDS08	9.25	9.15	5/16	1B	E	2-5/8	13/16	29.2
5-5V9.75	218.00	QDS08	9.75	9.65	5/16	1B	E	2-5/8	13/16	32.8
5-5V10.30	220.00	QDS08	10.30	10.20	5/16	1W	E	2-5/8	13/16	31.1
5-5V10.90	222.00	QDS08	10.90	10.80	5/16	1W	E	2-5/8	13/16	33.0
5-5V11.30	242.00	QDS08	11.30	11.20	5/16	1W	E	2-5/8	13/16	35.0
5-5V11.80	244.00	QDS08	11.80	11.70	5/16	1W	E	2-5/8	13/16	37.3
5-5V12.50	282.00	QDS08	12.50	12.40	5/16	1W	E	2-5/8	13/16	38.9
5-5V13.20	300.00	QDS08	13.20	13.10	5/16	1W	E	2-5/8	13/16	41.8
5-5V14.00	344.00	QDS08	14.00	13.90	5/16	1A	E	2-5/8	13/16	45.3
5-5V15.00	384.00	QDS08	15.00	14.90	5/16	1A	E	2-5/8	13/16	49.1
5-5V16.00	404.00	QDS08	16.00	15.90	5/16	1A	E	2-5/8	13/16	51.9
5-5V18.70	432.00	QDS08	18.70	18.60	9/32	6A	F	3-5/8	13/32	86.0
5-5V21.20	536.00	QDS08	21.20	21.10	7/32	6A	F	3-5/8	11/32	84.7
5-5V23.60	586.00	QDS08	23.60	23.50	7/32	6A	F	3-5/8	11/32	111.0
5-5V28.00	660.00	QDS08	28.00	27.90	7/32	6A	F	3-5/8	11/32	128.0
5-5V31.50	1080.00	QDS10	31.50	31.40	19/64	6A	J	4-1/2	25/64	174.0
5-5V37.50	1380.00	QDS10	37.50	37.40	7/8	6A	J	4-1/2	1/8	199.0
5-5V50.00	1920.00	QDS10	50.00	49.90	7/8	6A	J	4-1/2	1/8	319.0

P.D. for "5V" Belts = O.D.


¹ Reverse mount only.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web

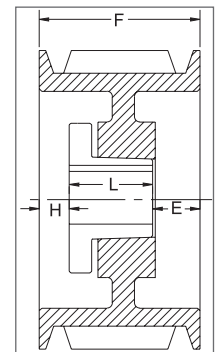

TYPE 1



TYPE 6



TYPE 11

Motor
Accessories

PT Components

Grinders

Baldor
Mod Express

ABB
Mod Express

ABB ATEX
Mod Express

Product
Index

5V SECTION

6 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 4-7/16 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
6-5V4.40 ¹ *	114.00	QDS08	4.40	4.30	11/16	11B	SD	1-13/16	3-5/16	7.2
6-5V4.65 ¹ *	120.00	QDS08	4.65	4.55	11/16	11B	SD	1-13/16	3-5/16	8.0
6-5V4.90*	126.00	QDS08	4.90	4.80	5/8	1B	SD	1-13/16	2	7.6
6-5V5.20	132.00	QDS08	5.20	5.10	5/8	1B	SD	1-13/16	2	9.6
6-5V5.50	138.00	QDS08	5.50	5.40	5/8	1B	SD	1-13/16	2	11.1
6-5V5.90	144.00	QDS08	5.90	5.80	1/2	1B	SK	1-7/8	2-1/16	10.9
6-5V6.30	150.00	QDS08	6.30	6.20	1/2	1B	SK	1-7/8	2-1/16	13.5
6-5V6.70	154.00	QDS08	6.70	6.60	13/16	1B	SF	2	1-5/8	14.2
6-5V7.10	160.00	QDS08	7.10	7.00	13/16	1B	SF	2	1-5/8	18.8
6-5V7.50	176.00	QDS08	7.50	7.40	13/16	1B	SF	2	1-5/8	20.8
6-5V8.00	186.00	QDS08	8.00	7.90	15/16	1B	E	2-5/8	7/8	22.3
6-5V8.50	198.00	QDS08	8.50	8.40	15/16	1B	E	2-5/8	7/8	27.1
6-5V9.00	220.00	QDS08	9.00	8.90	15/16	1B	E	2-5/8	7/8	30.5
6-5V9.25	224.00	QDS08	9.25	9.15	15/16	1B	E	2-5/8	7/8	32.2
6-5V9.75	228.00	QDS08	9.75	9.65	15/16	1B	E	2-5/8	7/8	36.2
6-5V10.30	248.00	QDS08	10.30	10.20	9/16	1W	E	2-5/8	1-1/4	33.6
6-5V10.90	260.00	QDS08	10.90	10.80	9/16	1W	E	2-5/8	1-1/4	36.9
6-5V11.30	260.00	QDS08	11.30	11.20	9/16	1W	E	2-5/8	1-1/4	37.7
6-5V11.80	262.00	QDS08	11.80	11.70	9/16	1W	E	2-5/8	1-1/4	38.5
6-5V12.50	320.00	QDS08	12.50	12.40	17/32	1W	F	3-5/8	9/32	43.3
6-5V13.20	342.00	QDS08	13.20	13.10	17/32	1W	F	3-5/8	9/32	46.0
6-5V14.00	384.00	QDS08	14.00	13.90	17/32	1W	F	3-5/8	9/32	45.7
6-5V15.00	424.00	QDS08	15.00	14.90	17/32	1A	F	3-5/8	9/32	49.2
6-5V16.00	464.00	QDS08	16.00	15.90	17/32	1A	F	3-5/8	9/32	77.0
6-5V18.70	520.00	QDS08	18.70	18.60	3/32	1A	F	3-5/8	23/32	78.6
6-5V21.20	590.00	QDS08	21.20	21.10	7/32	6A	F	3-5/8	1-1/32	96.1
6-5V23.60	660.00	QDS08	23.60	23.50	15/32	6A	J	4-1/2	13/32	114.3
6-5V28.00	740.00	QDS08	28.00	27.90	15/32	6A	J	4-1/2	13/32	130.6
6-5V31.50	1180.00	QDS10	31.50	31.40	15/32	6A	J	4-1/2	13/32	155.0
6-5V37.50	1440.00	QDS10	37.50	37.40	15/32	6A	J	4-1/2	13/32	221.0
6-5V50.00	2220.00	QDS10	50.00	49.90	1-13/32	5A	M°	6-3/4	29/32	350.0


P.D. for "5V" Belts = O.D.

*Note: M-N-P-W bushings are standard mounting only for these parts.


¹ Reverse mount only.

* Mounting bolts are supplied by Baldor with these parts.


Type of sheave "T": A = arms; B = block; W = web




TYPE 1



TYPE 5



TYPE 6



TYPE 11

5V SECTION

8 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 5-13/16 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
8-5V7.10	186.00	QDS08	7.10	7.00	1-5/16	1B	SF	2	2-1/2	23.0
8-5V7.50	206.00	QDS08	7.50	7.40	1-5/16	1B	SF	2	2-1/2	20.0
8-5V8.00	226.00	QDS08	8.00	7.90	1-7/16	1B	E	2-5/8	1-3/4	26.0
8-5V8.50	248.00	QDS08	8.50	8.40	1-7/16	1B	E	2-5/8	1-3/4	33.0
8-5V9.00	268.00	QDS08	9.00	8.90	1-7/16	1B	E	2-5/8	1-3/4	36.0
8-5V9.25	300.00	QDS08	9.25	9.15	1-1/32	1B	F	3-5/8	1-5/32	41.8
8-5V9.75	320.00	QDS08	9.75	9.65	1-1/32	1B	F	3-5/8	1-5/32	47.3
8-5V10.30	340.00	QDS08	10.30	10.20	1-1/32	1B	F	3-5/8	1-5/32	53.8
8-5V10.90	348.00	QDS08	10.90	10.80	1-1/32	1B	F	3-5/8	1-5/32	61.1
8-5V11.30	356.00	QDS08	11.30	11.20	1-1/32	1W	F	3-5/8	1-5/32	56.9
8-5V11.80	374.00	QDS08	11.80	11.70	1-1/32	1W	F	3-5/8	1-5/32	59.6
8-5V12.50	388.00	QDS08	12.50	12.40	1-1/32	1W	F	3-5/8	1-5/32	62.7
8-5V13.20	440.00	QDS08	13.20	13.10	1-1/32	1W	F	3-5/8	1-5/32	66.9
8-5V14.00	480.00	QDS08	14.00	13.90	1-1/32	1W	F	3-5/8	1-5/32	76.9
8-5V15.00	560.00	QDS08	15.00	14.90	1-1/32	1A	F	3-5/8	1-5/32	79.0
8-5V16.00	640.00	QDS08	16.00	15.90	1-1/32	1A	F	3-5/8	1-5/32	85.2
8-5V18.70	700.00	QDS08	18.70	18.60	5/32	1A	J	4-1/2	1-5/32	112.4
8-5V21.20	760.00	QDS08	21.20	21.10	7/32	6A	J	4-1/2	1-17/32	119.0
8-5V23.60	840.00	QDS08	23.60	23.50	5/32	1A	J	4-1/2	1-5/32	145.0
8-5V28.00	1020.00	QDS08	28.00	27.90	7/32	6A	J	4-1/2	1-17/32	185.0
8-5V31.50	1440.00	QDS10	31.50	31.40	7/32	2A	M°	6-3/4	1-5/32	260.0
8-5V37.50	1780.00	QDS10	37.50	37.40	9/32	5A	M°	6-3/4	21/32	329.0
8-5V50.00	2440.00	QDS10	50.00	49.90	7/32	5A	M°	6-3/4	23/32	500.0

10 GROOVES


Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 7-3/16 inches					
					H	Type	B	L	E	Approx. Wt (lbs)
10-5V8.00	252.00	QDS10	8.00	7.90	2-3/16	1B	E	2-5/8	2-3/8	32.0
10-5V8.50	272.00	QDS10	8.50	8.40	2-3/16	1B	E	2-5/8	2-3/8	38.0
10-5V9.00	300.00	QDS10	9.00	8.90	2-3/32	1B	F	3-5/8	1-15/32	46.0
10-5V9.25	304.00	QDS10	9.25	9.15	2-3/32	1B	F	3-5/8	1-15/32	48.0
10-5V9.75	360.00	QDS10	9.75	9.65	2-3/32	1B	F	3-5/8	1-15/32	54.0
10-5V10.30	372.00	QDS10	10.30	10.20	2-3/32	1B	F	3-5/8	1-15/32	61.0
10-5V10.90	384.00	QDS10	10.90	10.80	2-3/32	1B	F	3-5/8	1-15/32	69.0
10-5V11.30	440.00	QDS10	11.30	11.20	2-3/32	1B	F	3-5/8	1-15/32	73.0
10-5V11.80	480.00	QDS10	11.80	11.70	2-3/32	1W	F	3-5/8	1-15/32	77.0
10-5V12.50	500.00	QDS10	12.50	12.40	1-25/32	1W	J	4-1/2	29/32	89.4
10-5V13.20	580.00	QDS10	13.20	13.10	1-25/32	1W	J	4-1/2	29/32	99.3
10-5V14.00	640.00	QDS10	14.00	13.90	2-5/32	1W	J	4-1/2	17/32	110.5
10-5V15.00	720.00	QDS10	15.00	14.90	2-5/32	1W	J	4-1/2	17/32	125.0
10-5V16.00	780.00	QDS10	16.00	15.90	2-5/32	1A	J	4-1/2	17/32	100.0
10-5V18.70	860.00	QDS10	18.70	18.60	2-5/32	1A	J	4-1/2	17/32	123.6
10-5V21.20	960.00	QDS10	21.20	21.10	1-5/32	1A	J	4-1/2	1-17/32	144.7
10-5V23.60	1040.00	QDS10	23.60	23.50	7/32	1A	M°	6-3/4	7/32	245.0
10-5V28.00	1280.00	QDS10	28.00	27.90	7/32	1A	M°	6-3/4	7/32	252.0
10-5V31.50	1560.00	QDS10	31.50	31.40	7/32	1A	M°	6-3/4	7/32	288.0
10-5V37.50	1840.00	QDS10	37.50	37.40	7/32	1A	M°	6-3/4	7/32	372.0
10-5V50.00	2580.00	QDS10	50.00	49.90	9/32	1A	M°	6-3/4	5/32	596.0


P.D. for "5V" Belts = O.D. Type of sheave "T": A = arms; B = block; W = web

° Note: M-N-P-W bushings are standard mounting only for these parts.


For more details and additional products, see complete Baldor•Maska® Product Catalog or www.baldor.com




TYPE 1



TYPE 2



TYPE 5



TYPE 6

Motor
Accessories

PT Components

Grinders

Baldor
Mod Express

ABB
Mod Expressa

ABB ATEX
Mod Express


Product
Index

8V SECTION


4 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 4-7/8 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
4-8V12.50	544.00	QDS10	12.5	12.3	1/32	6W	F	3-5/8	1-9/32	69.0
4-8V13.20	552.00	QDS10	13.2	13.0	1/32	6W	F	3-5/8	1-9/32	72.5
4-8V14.00	560.00	QDS10	14.0	13.8	1/32	6W	F	3-5/8	1-9/32	84.0
4-8V15.00	596.00	QDS10	15.0	14.8	1/32	6W	F	3-5/8	1-9/32	92.8
4-8V16.00	660.00	QDS10	16.0	15.8	1/32	6A	F	3-5/8	1-9/32	83.5
4-8V17.00	720.00	QDS10	17.0	16.8	1/32	1A	F	3-5/8	1-7/32	106.0
4-8V18.00	760.00	QDS10	18.0	17.8	1/32	1A	F	3-5/8	1-7/32	100.0
4-8V19.00	790.00	QDS10	19.0	18.8	1/32	6A	F	3-5/8	1-9/32	113.0
4-8V20.00	820.00	QDS10	20.0	19.8	3/32	1A	J	4-1/2	9/32	117.8
4-8V21.20	840.00	QDS10	21.2	21.0	3/32	1A	J	4-1/2	9/32	139.0
4-8V22.40	886.00	QDS10	22.4	22.2	3/32	1A	J	4-1/2	9/32	150.0
4-8V24.80	1190.00	QDS10	24.8	24.6	27/32	5A	M°	6-3/4	1-1/32	225.0
4-8V30.00	1350.00	QDS10	30.0	29.8	27/32	5A	M°	6-3/4	1-1/32	261.0
4-8V35.50	1790.00	QDS10	35.5	35.3	27/32	5A	M°	6-3/4	1-1/32	321.0
4-8V40.00	1970.00	QDS10	40.0	39.8	27/32	5A	M°	6-3/4	1-1/32	365.0
4-8V44.50	2590.00	QDS10	44.5	44.3	27/32	5A	M°	6-3/4	1-1/32	424.0
4-8V53.00	3240.00	QDS10	53.0	52.8	27/32	5A	M°	6-3/4	1-1/32	560.0



TYPE 1




TYPE 2


5 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 6 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
5-8V12.50	588.00	QDS10	12.5	12.3	1-1/16	1W	F	3-5/8	1-5/16	78.0
5-8V13.20	618.00	QDS10	13.2	13.0	1-1/16	1W	F	3-5/8	1-5/16	84.9
5-8V14.00	660.00	QDS10	14.0	13.8	1-1/16	1W	F	3-5/8	1-5/16	93.0
5-8V15.00	700.00	QDS10	15.0	14.8	1-3/32	1W	F	3-5/8	1-9/32	105.0
5-8V16.00	740.00	QDS10	16.0	15.8	1-3/32	1A	F	3-5/8	1-9/32	113.0
5-8V17.00	846.00	QDS10	17.0	16.8	19/32	1A	J	4-1/2	29/32	119.0
5-8V18.00	900.00	QDS10	18.0	17.8	19/32	1A	J	4-1/2	29/32	132.5
5-8V19.00	960.00	QDS10	19.0	18.8	19/32	1A	J	4-1/2	29/32	126.0
5-8V20.00	990.00	QDS10	20.0	19.8	19/32	1A	J	4-1/2	29/32	135.0
5-8V21.20	1150.00	QDS10	21.2	21.0	19/32	1A	J	4-1/2	29/32	160.0
5-8V22.40	1310.00	QDS10	22.4	22.2	9/32	2A	M°	6-3/4	1-1/32	217.0
5-8V24.80	1390.00	QDS10	24.8	24.6	5/16	2A	M°	6-3/4	1-1/16	246.0
5-8V30.00	1570.00	QDS10	30.0	29.8	5/16	2A	M°	6-3/4	1-1/16	296.0
5-8V35.50	1990.00	QDS10	35.5	35.3	5/16	2A	M°	6-3/4	1-1/16	377.0
5-8V40.00	2240.00	QDS10	40.0	39.8	5/16	2A	M°	6-3/4	1-1/16	441.0
5-8V44.50	2990.00	QDS10	44.5	44.3	1-5/16	5A	N°	8-1/8	13/16	528.0
5-8V53.00	3480.00	QDS10	53.0	52.8	1-5/16	5A	N°	8-1/8	13/16	669.0



TYPE 5



TYPE 6

P.D. for "8V" Belts = O.D. Type of sheave "T": A = arms; B = block; W = web


° Note: M-N-P-W bushings are standard mounting only for these parts.

For more details and additional products, see complete Baldor•Maska® Product Catalog or www.baldor.com


8V SECTION – 6 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 7-1/8 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
6-8V12.50	618.00	QDS10	12.5	12.30	1-3/32	1B	F	3-5/8	2-13/32	79.0
6-8V13.20	660.00	QDS10	13.2	13.0	1-1/16	1W	F	3-5/8	2-7/16	94.0
6-8V14.00	722.00	QDS10	14.0	13.8	1-1/16	1W	F	3-5/8	2-7/16	104.0
6-8V15.00	774.00	QDS10	15.0	14.8	1-5/32	1W	J	4-1/2	1-15/32	123.0
6-8V16.00	824.00	QDS10	16.0	15.8	1-5/32	1W	J	4-1/2	1-15/32	138.6
6-8V17.00	928.00	QDS10	17.0	16.8	1-5/32	1A	J	4-1/2	1-15/32	125.0
6-8V18.00	1000.00	QDS10	18.0	17.8	1-5/32	1A	J	4-1/2	1-15/32	131.0
6-8V19.00	1040.00	QDS10	19.0	18.8	1-5/32	1A	J	4-1/2	1-15/32	146.0
6-8V20.00	1190.00	QDS10	20.0	19.8	1-9/32	2A	M°	6-3/4	29/32	209.0
6-8V21.20	1320.00	QDS10	21.2	21.0	1-9/32	2W	M°	6-3/4	29/32	240.0
6-8V22.40	1560.00	QDS10	22.4	22.2	1-9/32	2A	M°	6-3/4	29/32	232.0
6-8V24.80	1590.00	QDS10	24.8	24.6	9/32	1A	M°	6-3/4	3/32	257.0
6-8V30.00	1610.00	QDS10	30.0	29.8	9/32	1A	M°	6-3/4	3/32	320.0
6-8V35.50	2190.00	QDS10	35.5	35.3	3/16	5A	N°	8-1/8	13/16	440.0
6-8V40.00	2440.00	QDS10	40.0	39.8	3/16	2A	N°	8-1/8	1-3/16	580.0
6-8V44.50	3390.00	QDS10	44.5	44.3	3/16	5A	N°	8-1/8	13/16	590.0
6-8V53.00	3720.00	QDS10	53.0	52.8	3/16	5A	N°	8-1/8	13/16	750.0
6-8V63.00	6190.00	QDS10	63.0	62.8	3/4	5A	P°	9-3/8	1-1/2	1050.0
6-8V71.00	9000.00	QDS10	71.0	70.8	3/4	5A	P°	9-3/8	1-1/2	1278.0



TYPE 1




TYPE 2


8 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 9-3/8 inches					
					H	Type	B	L	E	Approx. Wt. (lbs)
8-8V12.50	780.00	QDS10	12.5	12.3	2-1/32	1B	J	4-1/2	2-27/32	119.0
8-8V13.20	824.00	QDS10	13.2	13.0	2-1/32	1B	J	4-1/2	2-27/32	135.0
8-8V14.00	866.00	QDS10	14.0	13.8	2-1/32	1W	J	4-1/2	2-27/32	135.0
8-8V15.00	928.00	QDS10	15.0	14.8	2-1/32	1W	J	4-1/2	2-27/32	150.0
8-8V16.00	1010.00	QDS10	16.0	15.8	2-5/32	1W	J	4-1/2	2-23/32	168.7
8-8V17.00	1124.00	QDS10	17.0	16.8	2-9/32	1W	M°	6-3/4	11/32	213.0
8-8V18.00	1200.00	QDS10	18.0	17.8	2-9/32	1W	M°	6-3/4	11/32	214.0
8-8V19.00	1240.00	QDS10	19.0	18.8	2-9/32	1W	M°	6-3/4	11/32	221.0
8-8V20.00	1280.00	QDS10	20.0	19.8	2-9/32	1W	M°	6-3/4	11/32	280.0
8-8V21.20	1380.00	QDS10	21.2	21.0	2-9/32	1W	M°	6-3/4	11/32	305.0
8-8V22.40	1590.00	QDS10	22.4	22.2	2-9/32	1A	M°	6-3/4	11/32	272.0
8-8V24.80	1790.00	QDS10	24.8	24.6	3/16	1A	N°	8-1/8	1-1/16	340.0
8-8V30.00	1840.00	QDS10	30.0	29.8	3/16	1A	N°	8-1/8	1-1/16	455.0
8-8V35.50	2390.00	QDS10	35.5	35.3	3/16	1A	N°	8-1/8	1-1/16	560.0
8-8V40.00	2640.00	QDS10	40.0	39.8	3/16	1A	N°	8-1/8	1-1/16	648.0
8-8V44.50	3790.00	QDS10	44.5	44.3	1/4	2A	P°	9-3/8	1/4	801.0
8-8V53.00	3960.00	QDS10	53.0	52.8	1/4	2A	P°	9-3/8	1/4	1003.0
8-8V58.00	5500.00	QDS10	58.0	57.8	1/4	2A	P°	9-3/8	1/4	1142.0
8-8V63.00	6990.00	QDS10	63.0	62.8	1/4	2A	P°	9-3/8	1/4	1278.0
8-8V71.00	10000.00	QDS10	71.0	70.8	0	5A	W°	11-3/8	2	1670.0



TYPE 5



TYPE 6

Large Hub Series

8-8V35.5WOF0	3,220.00	QDS10	35.5	35.3	2-5/8	6A	W°	11-3/8	5/8	845.6
8-8V40.0WOF0	3,700.00	QDS10	40.0	39.8	2-5/8	6A	W°	11-3/8	5/8	919.0
8-8V44.5WOF0	5,100.00	QDS10	44.5	44.3	2-5/8	6A	W°	11-3/8	5/8	1032.0

P.D. for "8V" Belts = O.D. Type of sheave "T": A = arms; B = block; W = web ° Note: M-N-P-W bushings are standard mounting only for these parts.

For more details and additional products, see complete Baldor•Maska® Product Catalog or www.baldor.com

 Motor
Accessories

PT Components

Grinders

 Baldor
Mod Express

 ABB
Mod Expressa


 ABB ATEX
Mod Express

 Product
Index


8V SECTION – 10 GROOVES

Dimensions

Part Number	List Price	Mult. Sym.	O.D.	Datum dia.	F = 11-5/8 inches					Approx. Wt. (lbs)
					H	Type	B	L	E	
10-8V12.50	948.00	QDS10	12.5	12.3	2-5/32	1B	J	4-1/2	4-31/32	135.0
10-8V13.20	1114.00	QDS10	13.2	13.0	2-5/32	1B	J	4-1/2	4-31/32	148.0
10-8V14.00	1278.00	QDS10	14.0	13.8	2-5/32	1B	J	4-1/2	4-31/32	165.0
10-8V15.00	1442.00	QDS10	15.0	14.8	2-9/32	1B	M°	6-3/4	2-19/32	215.0
10-8V16.00	1608.00	QDS10	16.0	15.8	2-9/32	1B	M°	6-3/4	2-19/32	235.0
10-8V17.00	1648.00	QDS10	17.0	16.8	2-9/32	1W	M°	6-3/4	2-19/32	282.0
10-8V18.00	1720.00	QDS10	18.0	17.8	2-9/32	1W	M°	6-3/4	2-19/32	296.0
10-8V19.00	1760.00	QDS10	19.0	18.8	2-9/32	1W	M°	6-3/4	2-19/32	300.0
10-8V20.00	1860.00	QDS10	20.0	19.8	2-9/32	1W	M°	6-3/4	2-19/32	368.0
10-8V21.20	2040.00	QDS10	21.2	21.0	2-9/32	1W	M°	6-3/4	2-19/32	318.0
10-8V22.40	2246.00	QDS10	22.4	22.2	3/16	1A	N°	8-1/8	3-5/16	368.0
10-8V24.80	2290.00	QDS10	24.8	24.6	3/16	1A	N°	8-1/8	3-5/16	402.0
10-8V30.00	2350.00	QDS10	30.0	29.8	3/16	1A	N°	8-1/8	3-5/16	505.0
10-8V35.50	2790.00	QDS10	35.5	35.3	1/4	1A	P°	9-3/8	2	675.0
10-8V40.00	3350.00	QDS10	40.0	39.8	1/4	1A	P°	9-3/8	2	745.0
10-8V44.50	4190.00	QDS10	44.5	44.3	1/4	1A	P°	9-3/8	2	888.0
10-8V53.00	5000.00	QDS10	53.0	52.8	1/4	1A	P°	9-3/8	2	1188.0
10-8V58.00	7000.00	QDS10	58.0	57.8	3/8	2A	W°	11-3/8	1/8	1445.0
10-8V63.00	9000.00	QDS10	63.0	62.8	3/8	2A	W°	11-3/8	1/8	1578.0
10-8V71.00	11500.00	QDS10	71.0	70.8	3/8	2A	W°	11-3/8	1/8	1907.0
Large Hub Series										
10-8V35.5WOF0	4200.00	QDS10	35.5	35.3	2-5/8	6A	W°	11-3/8	2-7/8	904.0
10-8V40.0WOF0	5050.00	QDS10	40.0	39.8	2-5/8	6A	W°	11-3/8	2-7/8	988.0
10-8V44.5WOF0	6250.00	QDS10	44.5	44.3	2-5/8	6A	W°	11-3/8	2-7/8	1105.0



TYPE 1




TYPE 2

12 GROOVES

Dimensions

Part-Number	List-Price	Mult. Sym.	O.D.	Datum dia.	F = 13-7/8-inches					Approx. Wt. (lbs)
					H	Type	B	L	E	
12-8V12.50	2080.00	QDS10	12.5	12.3	2-9/32	1B	M°	6-3/4	4-27/32	158.0
12-8V13.20	2120.00	QDS10	13.2	13.0	2-9/32	1B	M°	6-3/4	4-27/32	183.0
12-8V14.00	2160.00	QDS10	14.0	13.8	2-9/32	1B	M°	6-3/4	4-27/32	210.0
12-8V15.00	2200.00	QDS10	15.0	14.8	2-9/32	1B	M°	6-3/4	4-27/32	242.0
12-8V16.00	2240.00	QDS10	16.0	15.8	2-9/32	1B	M°	6-3/4	4-27/32	300.0
12-8V17.00	2280.00	QDS10	17.0	16.8	2-9/32	1B	M°	6-3/4	4-27/32	321.0
12-8V18.00	2320.00	QDS10	18.0	17.8	2-9/32	1B	M°	6-3/4	4-27/32	337.0
12-8V19.00	2400.00	QDS10	19.0	18.8	3/16	1B	N°	8-1/8	5-9/16	380.0
12-8V20.00	2480.00	QDS10	20.0	19.8	3/16	1W	N°	8-1/8	5-9/16	378.0
12-8V21.20	2560.00	QDS10	21.2	21.0	3/16	1W	N°	8-1/8	5-9/16	414.0
12-8V22.40	2640.00	QDS10	22.4	22.2	3/16	1A	N°	8-1/8	5-9/16	431.0
12-8V24.80	3000.00	QDS10	24.8	24.6	3/16	1A	N°	8-1/8	5-9/16	500.0
12-8V30.00	3380.00	QDS10	30.0	29.8	1/4	1A	P°	9-3/8	4-1/4	616.0
12-8V35.50	3660.00	QDS10	35.5	35.3	1/4	1A	P°	9-3/8	4-1/4	775.0
12-8V40.00	5000.00	QDS10	40.0	39.8	1/4	1A	P°	9-3/8	4-1/4	890.0
12-8V44.50	6500.00	QDS10	44.5	44.3	1/4	1A	P°	9-3/8	4-1/4	1058.0
12-8V53.00	8000.00	QDS10	53.0	52.8	5/8	1A	W°	11-3/8	1-7/8	1485.0
12-8V58.00	9000.00	QDS10	58.0	57.8	5/8	1A	W°	11-3/8	1-7/8	1590.0
12-8V63.00	10000.00	QDS10	63.0	62.8	5/8	1A	W°	11-3/8	1-7/8	1722.0
12-8V71.00	13000.00	QDS10	71.0	70.8	5/8	1A	W°	11-3/8	1-7/8	2200.0
Large-Hub-Series										
12-8V35.5WOF0	4,900.00	QDS10	35.5	35.3	2-5/8	6A	W°	11-3/8	5-1/8	962.0
12-8V40.0WOF0	6,300.00	QDS10	40.0	39.8	2-5/8	6A	W°	11-3/8	5-1/8	1052.0
12-8V44.5WOF0	8,100.00	QDS10	44.5	44.3	2-5/8	6A	W°	11-3/8	5-1/8	1125.0



TYPE 6

P.D. for "8V" Belts = O.D. Type of sheave "T": A = arms; B = block; W = web ° Note: M-N-P-W bushings are standard mounting only for these parts.

For more details and additional products, see complete Baldor•Maska® Product Catalog or www.baldor.com

Timing Pulley



Features: All parts are completely machined in cast iron; some parts made from steel. Synchronized no-slip transmission. No lubrication required. Compact design, high efficiency. Low maintenance, economical operations.

Note: Baldor double taper-style timing pulleys are no longer being manufactured. They will be gradually replaced by the more conventional single taper model (equivalent compatible products).

How to order: Example: P30H300-2012; P30 = number of teeth (30). H = Tooth Pitch (1/2"). 300 = Timing Belt Width (3.00"). 2012 = Hub Size relates to the taper lock bushing. PB = indicates available in Plain Bore


XL Pitch

For Belts 1/4", 5/16" & 3/8" wide - 1/5" pitch (XL037) - Face width (F) = 9/16"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		K	M	N	H	Min.	Max.	
						Sprocket	Flange									
P10XL037-PB	9.00	TPL40	...	10	0.637	0.617	0.91	...	3B F	1/4	...	...	1/2	3/16	1/4*	0.05
P11XL037-PB	9.40	TPL40	...	11	0.700	0.680	0.91	...	3B F	1/4	...	...	1/2	3/16	1/4*	0.05
P12XL037-PB	9.80	TPL40	...	12	0.764	0.744	0.98	...	3B F	1/4	...	...	1/2	3/16	5/16*	0.07
P14XL037-PB	11.70	TPL40	...	14	0.891	0.871	1.10	...	3B F	1/4	...	...	9/16	1/4	3/8*	0.09
P15XL037-PB	12.10	TPL40	...	15	0.955	0.935	1.10	...	3B F	1/4	...	...	5/8	1/4	7/16*	0.10
P16XL037-PB	12.80	TPL40	...	16	1.019	0.999	1.26	...	3B F	1/4	...	...	11/16	1/4	1/2*	0.12
P18XL037-PB	14.30	TPL40	...	18	1.146	1.126	1.38	...	3B F	1/4	...	...	13/16	1/4	9/16*	0.16
P20XL037-PB	15.10	TPL40	...	20	1.273	1.253	1.50	...	3B F	11/32	...	...	15/16	1/4	11/16*	0.21
P21XL037-PB	16.20	TPL40	...	21	1.337	1.317	1.50	...	3B F	11/32	...	...	15/16	1/4	11/16*	0.23
P22XL037-PB	16.60	TPL40	...	22	1.401	1.381	1.61	...	3B F	11/32	...	...	1	1/4	3/4*	0.26
P24XL037-PB	18.50	TPL40	...	24	1.528	1.508	1.73	...	3B F	11/32	...	...	1-1/16	1/4	13/16*	0.31
P28XL037-PB	21.10	TPL40	...	28	1.783	1.763	2.01	...	3B F	11/32	...	...	1-3/16	1/4	15/16*	0.42
P30XL037-PB	22.20	TPL40	...	30	1.910	1.890	2.13	...	3B F	11/32	...	...	1-3/8	5/16	1-1/16*	0.41
P32XL037-PB	22.60	TPL40	...	32	2.037	2.017	...	...	3B	7/16	...	...	1-1/2	5/16	1-3/16*	0.63
P36XL037-PB	23.00	TPL40	...	36	2.292	2.272	...	...	3B	7/16	...	...	1-1/2	5/16	1-3/16*	0.74
P40XL037-PB	23.40	TPL40	...	40	2.546	2.526	...	...	3B	7/16	...	...	1-1/2	5/16	1-3/16*	0.88
P42XL037-PB	23.80	TPL40	...	42	2.674	2.654	...	...	3B	7/16	...	...	1-1/2	5/16	1-3/16*	0.96
P44XL037-PB	24.50	TPL40	...	44	2.801	2.781	...	...	3B	7/16	...	...	1-1/2	5/16	1-3/16*	1.03
P48XL037-PB	26.00	TPL40	...	48	3.056	3.036	...	...	3B	7/16	...	...	1-1/2	5/16	1-3/16*	1.20
P60XL037-PB	31.30	TPL40	...	60	3.820	3.800	...	...	3B	7/16	...	...	1-1/2	3/8	1-3/16*	1.78
P72XL037-PB	39.20	TPL40	...	72	4.584	4.564	...	...	3B	7/16	...	...	1-1/2	3/8	1-3/16*	2.51
**P32XL037-1108	27.50	TPL40	1108	32	2.037	2.017	...	...	2B	0	25/32	...	...	1/2	1-1/8	0.25
**P36XL037-1108	28.40	TPL40	1108	36	2.292	2.272	...	...	2B	0	25/32	...	...	1/2	1-1/8	0.38
P40XL037-1108	29.50	TPL40	1108	40	2.546	2.526	...	...	2B	7/32	25/32	...	2-5/32	1/2	1-1/8	0.57
P42XL037-1108	31.10	TPL40	1108	42	2.674	2.654	...	...	2B	7/32	25/32	...	2-17/64	1/2	1-1/8	0.67
P44XL037-1108	32.50	TPL40	1108	44	2.801	2.781	...	...	2B	7/32	25/32	...	2-11/32	1/2	1-1/8	0.77
P48XL037-1108	35.90	TPL40	1108	48	3.056	3.036	...	...	2B	7/32	25/32	...	2-19/32	1/2	1-1/8	0.99
P60XL037-1210	37.50	TPL40	1210	60	3.820	3.800	...	...	2B	7/16	63/64	...	3-13/32	1/2	1-1/4	2.02
P72XL037-1610	39.10	TPL40	1610	72	4.584	4.564	...	...	2B	7/16	63/64	...	4	1/2	1-11/16	2.86

*Available from stock in min. plain bore. Max. bore is w/o keyway. (If keyway is used, reduce max. bore listed by twice the keyway depth.) (Two hex-socket set screws furnished @ 90 degrees are included in price of pulley.)

**These parts are made of steel

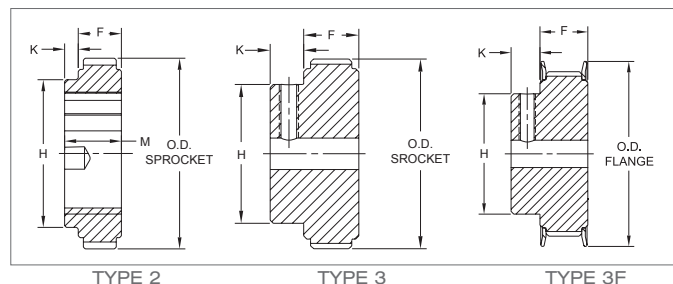


Timing Pulley L Pitch

For belts 1/2" wide - 3/8" pitch (L050) - Face Width (F) = 3/4"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		K	M	N	H	Min.	Max.	
						Sprocket	Flange									
P10L050-PB	14.60	TPL40	...	10	1.194	1.164	1.46	...	3B F	1/2	...	...	7/8	3/8	*1/2	0.20
P12L050-PB	16.10	TPL40	...	12	1.432	1.402	1.69	...	3B F	1/2	...	...	1-1/8	3/8	*3/4	0.34
P13L050-PB	17.00	TPL40	...	13	1.552	1.522	1.73	...	3B F	1/2	...	...	1-7/32	3/8	*3/4	0.42
P14L050-PB	18.80	TPL40	...	14	1.671	1.641	1.89	...	3B F	1/2	...	...	1-5/16	3/8	*7/8	0.48
P15L050-PB	19.20	TPL40	...	15	1.790	1.760	2.01	...	3B F	1/2	...	...	1-3/8	1/2	*7/8	0.53
P16L050-PB	20.60	TPL40	...	16	1.910	1.880	2.13	...	3B F	1/2	...	...	1-1/2	1/2	*1	0.62
P17L050-PB	21.80	TPL40	...	17	2.029	1.999	2.24	...	3B F	1/2	...	...	1-1/2	1/2	*1	0.70
P18L050-1108	27.50	TPL40	1108	18	2.149	2.119	2.38	...	2B F	1/32	25/32	...	1-49/64	1/2	1-1/8	0.40
P20L050-1108	28.40	TPL40	1108	20	2.387	2.357	2.64	...	2B F	1/32	25/32	...	2	1/2	1-1/8	0.55
P21L050-1108	29.10	TPL40	1108	21	2.507	2.477	2.76	...	2B F	1/32	25/32	...	1-31/32	1/2	1-1/8	0.65
P22L050-1108	29.50	TPL40	1108	22	2.626	2.596	2.95	...	2B F	1/32	25/32	...	2-11/64	1/2	1-1/8	0.75
**P24L050-1210	31.10	TPL40	1210	24	2.865	2.835	3.13	...	2B F	15/64	63/64	...	2-9/32	1/2	1-1/4	0.90
P26L050-1210	32.50	TPL40	1210	26	3.104	3.074	3.40	...	2B F	15/64	63/64	...	2-9/16	1/2	1-1/4	1.10
P28L050-1210	34.80	TPL40	1210	28	3.342	3.312	3.59	...	2B F	15/64	63/64	...	2-9/16	1/2	1-1/4	1.30
**P30L050-1610	35.00	TPL40	1610	30	3.581	3.551	3.83	...	2B F	15/64	63/64	...	2-3/4	1/2	1-11/16	1.40
P32L050-1610	53.90	TPL40	1610	32	3.820	3.790	4.04	...	2B F	15/64	63/64	...	2-29/32	1/2	1-11/16	1.65
P40L050-2012	58.50	TPL40	2012	40	4.775	4.745	5.05	...	2B F	7/16	1-3/16	...	3-13/16	1/2	2-1/8	3.00
P48L050-2012	68.60	TPL40	2012	48	5.730	5.700	5.91	...	2B F	7/16	1-3/16	...	3-15/16	1/2	2-1/8	4.55
P60L050-2012	75.80	TPL40	2012	60	7.162	7.132	...	...	2W	7/16	1-3/16	...	4-11/64	1/2	2-1/8	6.15
P72L050-2012	81.50	TPL40	2012	72	8.594	8.564	...	...	2W	7/16	1-3/16	...	4-11/64	1/2	2-1/8	9.55
P84L050-2517	93.70	TPL40	2517	84	10.027	9.997	...	...	2W	1-1/64	1-49/64	...	4-11/16	1/2	2-11/16	13.75

*Available from stock in min. plain bore only. Max. bore is without keyway. (If keyway is used, reduce max. bore listed by twice the keyway depth.)

**These parts are made of steel

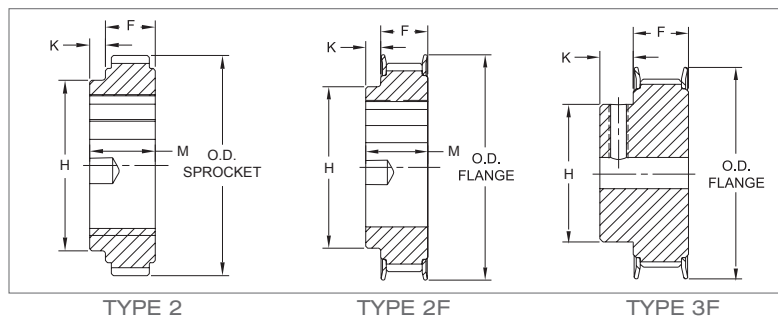


Timing Pulley L Pitch

For Belts 3/4" wide - 3/8" pitch (L075) - Face width (F) = 1"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		K	M	N	H	Min.	Max.	
						Sprocket	Flange									
P12L075-PB	19.50	TPL40	...	12	1.432	1.402	1.69	...	3B F	1/2	...	...	1-1/8	3/8	*3/4	0.43
P13L075-PB	19.90	TPL40	...	13	1.552	1.522	1.73	...	3B F	1/2	...	...	1-7/32	3/8	*3/4	0.50
P14L075-PB	21.30	TPL40	...	14	1.671	1.641	1.89	...	3B F	1/2	...	...	1-5/16	3/8	*7/8	0.53
P15L075-PB	22.00	TPL40	...	15	1.790	1.760	2.01	...	3B F	1/2	...	...	1-3/8	1/2	*7/8	0.60
P16L075-PB	22.80	TPL40	...	16	1.910	1.880	2.13	...	3B F	1/2	...	...	1-1/2	1/2	*1	0.70
P17L075-PB	24.00	TPL40	...	17	2.029	1.999	2.24	...	3B F	1/2	...	...	1-1/2	1/2	*1	0.80
P18L075-1108	29.10	TPL40	1108	18	2.149	2.119	2.38	1.60	1B F	13/64	25/32	0	...	1/2	1-1/8	0.45
P20L075-1108	30.50	TPL40	1108	20	2.387	2.357	2.64	1.77	1B F	13/64	25/32	0	...	1/2	1-1/8	0.65
P22L075-1108	33.20	TPL40	1108	22	2.626	2.596	2.95	1.89	1B F	13/64	25/32	0	...	1/2	1-1/8	0.90
P24L075-1210	34.80	TPL40	1210	24	2.865	2.835	3.13	...	2B F	0	63/64	...	...	1/2	1-1/4	0.90
P26L075-1210	36.80	TPL40	1210	26	3.104	3.074	3.40	...	2B F	0	63/64	...	...	1/2	1-1/4	1.25
P28L075-1610	39.50	TPL40	1610	28	3.342	3.312	3.59	...	2B F	0	63/64	...	...	1/2	1-11/16	1.20
P30L075-1610	42.50	TPL40	1610	30	3.581	3.551	3.83	...	2B F	0	63/64	...	...	1/2	1-11/16	1.85
P32L075-1610	45.20	TPL40	1610	32	3.820	3.790	4.04	...	2B F	0	63/64	...	...	1/2	1-11/16	1.85
P40L075-2012	62.50	TPL40	2012	40	4.775	4.745	5.05	...	2B F	13/64	1-3/16	...	3-13/16	1/2	2-1/8	3.30
P48L075-2012	71.70	TPL40	2012	48	5.730	5.700	5.91	...	2B F	13/64	1-3/16	...	3-15/16	1/2	2-1/8	5.35
P60L075-2012	82.20	TPL40	2012	60	7.162	7.132	...	...	2W	13/64	1-3/16	...	4-11/64	1/2	2-1/8	6.45
P72L075-2012	89.20	TPL40	2012	72	8.594	8.564	...	...	2W	13/64	1-3/16	...	4-11/64	1/2	2-1/8	9.70
P84L075-2517	109.60	TPL40	2517	84	10.027	9.997	...	...	2W	25/32	1-49/64	...	4-11/16	1/2	2-11/16	14.55

*Available from stock in min. plain bore only. Max. bore is without keyway. (If keyway is used, reduce max. bore listed by twice the keyway depth.)

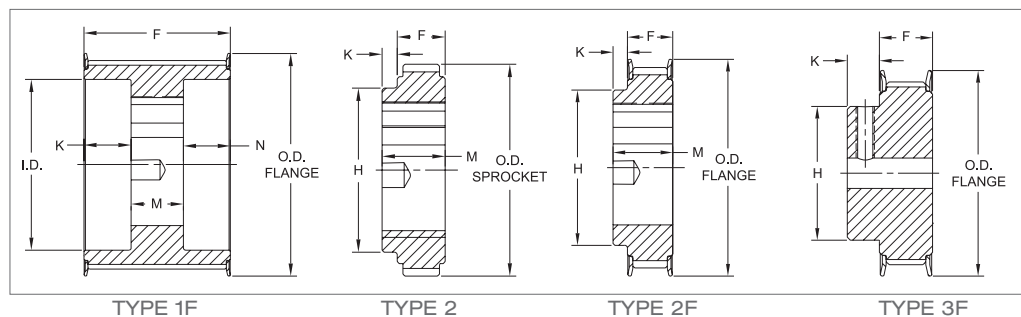


Timing Pulley L Pitch

For Belts 1" wide - 3/8" pitch (L100) - Face width (F) = 1-1/4"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		K	M	N	H	Min.	Max.	
						Sprocket	Flange									
P13L100-PB	22.50	TPL40	...	13	1.552	1.522	1.73	...	3B F	1/2	...	...	1-7/32	3/8	*3/4	0.60
P14L100-PB	23.30	TPL40	...	14	1.671	1.641	1.89	...	3B F	1/2	...	...	1-5/16	3/8	*7/8	0.65
P15L100-PB	24.00	TPL40	...	15	1.790	1.760	2.01	...	3B F	1/2	...	...	1-3/8	1/2	*7/8	0.74
P16L100-PB	24.80	TPL40	...	16	1.910	1.880	2.13	...	3B F	1/2	...	...	1-1/2	1/2	*1	0.80
P17L100-PB	26.30	TPL40	...	17	2.029	1.999	2.24	...	3B F	1/2	...	...	1-1/2	1/2	*1	1.00
P18L100-1108	32.00	TPL40	1108	18	2.149	2.119	2.38	1.60	1B F	15/32	25/32	0	...	1/2	1-1/8	0.55
P20L100-1108	33.60	TPL40	1108	20	2.387	2.357	2.64	1.77	1B F	15/32	25/32	0	...	1/2	1-1/8	0.80
P22L100-1108	36.40	TPL40	1108	22	2.626	2.596	2.95	1.89	1B F	15/32	25/32	0	...	1/2	1-1/8	1.05
P24L100-1210	37.50	TPL40	1210	24	2.865	2.835	3.13	2.24	1B F	9/32	63/64	0	...	1/2	1-1/4	1.25
P26L100-1210	40.00	TPL40	1210	26	3.104	3.074	3.40	2.36	1B F	9/32	63/64	0	...	1/2	1-1/4	1.45
P28L100-1610	42.50	TPL40	1610	28	3.342	3.312	3.59	2.54	1B F	9/32	63/64	0	...	1/2	1-11/16	1.45
P30L100-1610	46.10	TPL40	1610	30	3.581	3.551	3.83	2.80	1B F	9/32	63/64	0	...	1/2	1-11/16	1.75
P32L100-1610	49.80	TPL40	1610	32	3.820	3.790	4.04	2.95	1B F	9/32	63/64	0	...	1/2	1-11/16	2.15
P40L100-2012	67.90	TPL40	2012	40	4.775	4.745	5.05	3.78	1B F	5/64	1-3/16	0	...	1/2	2-1/8	3.75
P48L100-2012	78.80	TPL40	2012	48	5.730	5.700	5.91	4.72	1B F	5/64	1-3/16	0	...	1/2	2-1/8	6.10
P60L100-2012	92.70	TPL40	2012	60	7.162	7.132	...	6.54	1W	5/64	1-3/16	0	...	1/2	2-1/8	6.95
P72L100-2012	112.20	TPL40	2012	72	8.594	8.564	...	7.95	1W	5/64	1-3/16	0	...	1/2	2-1/8	10.60
P84L100-2517	128.70	TPL40	2517	84	10.027	9.997	...	...	2W	33/64	1-49/64	...	4-11/16	1/2	2-11/16	15.15

*Available from stock in min. plain bore. Max. bore is w/o keyway. (If keyway is used, reduce max. bore listed by twice the keyway depth.)

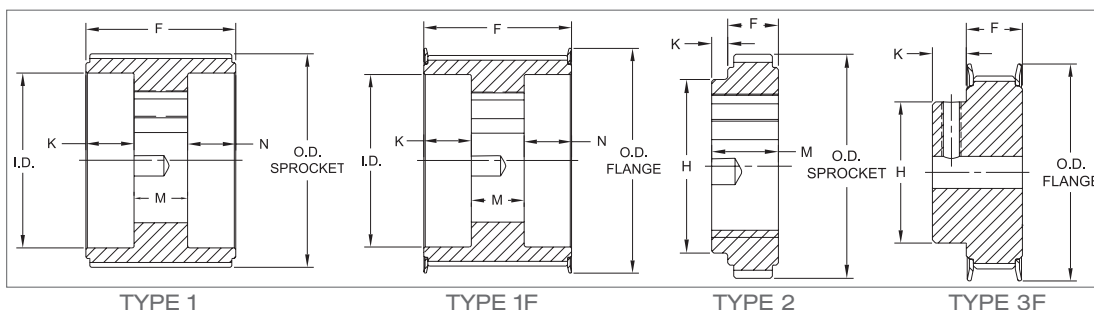


Timing Pulley H Pitch

For Belts 1" wide - 1/2" pitch (H100) - Face width (F) = 1-1/4"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		K	M	N	H	Min.	Max.	
						Sprocket	Flange									
*P14H100-1108	32.50	TPL40	1108	14	2.228	2.174	2.52	1.60	1B F	7/16	25/32	0	...	1/2	1-1/8	0.70
*P16H100-1108	35.50	TPL40	1108	16	2.546	2.492	2.77	1.77	1B F	7/16	25/32	0	...	1/2	1-1/8	0.90
*P18H100-1210	37.50	TPL40	1210	18	2.865	2.811	3.12	2.24	1B F	15/64	63/64	0	...	1/2	1-1/4	1.00
*P20H100-1210	41.10	TPL40	1210	20	3.183	3.129	3.40	2.36	1B F	15/64	63/64	0	...	1/2	1-1/4	1.45
P22H100-1610	48.90	TPL40	1610	22	3.501	3.447	3.70	2.64	1B F	9/32	63/64	0	...	1/2	1-11/16	1.60
P24H100-1610	54.30	TPL40	1610	24	3.820	3.766	4.04	2.89	1B F	9/32	63/64	0	...	1/2	1-11/16	2.10
P26H100-2012	62.00	TPL40	2012	26	4.138	4.084	4.41	3.23	1B F	5/64	1-3/16	0	...	1/2	2-1/8	2.25
P28H100-2012	66.10	TPL40	2012	28	4.456	4.402	4.74	3.56	1B F	5/64	1-3/16	0	...	1/2	2-1/8	2.95
P30H100-2012	69.70	TPL40	2012	30	4.775	4.721	5.04	3.86	1B F	5/64	1-3/16	0	...	1/2	2-1/8	3.60
P32H100-2517	69.70	TPL40	2517	32	5.093	5.039	5.32	...	2B F	33/64	1-49/64	...	4-11/64	1/2	2-11/16	4.20
P40H100-2517	92.30	TPL40	2517	40	6.366	6.312	6.63	...	2W F	33/64	1-49/64	...	4-11/16	1/2	2-11/16	7.40
P48H100-2517	119.70	TPL40	2517	48	7.639	7.585	7.87	...	2W F	33/64	1-49/64	...	4-11/16	1/2	2-11/16	9.95
**P60H100-3020	163.40	TPL40	3020	60	9.549	9.495	...	...	2W	5/8	1-31/32	...	2-29/32	7/8	3-1/4	16.45
**P72H100-3020	166.60	TPL40	3020	72	11.459	11.405	...	...	2W	5/8	1-31/32	...	5-29/32	7/8	3-1/4	22.75
**P84H100-3020	205.60	TPL40	3020	84	13.369	13.315	...	...	2W	5/8	1-31/32	...	5-29/32	7/8	3-1/4	29.90
**P96H100-3020	256.60	TPL40	3020	96	15.279	15.225	...	...	2A	5/8	1-31/32	...	5-29/32	7/8	3-1/4	28.75
**P120H100-3020	411.60	TPL40	3020	120	19.099	19.045	...	...	2A	5/8	1-31/32	...	5-29/32	7/8	3-1/4	42.25

* Face width (F) = 1-7/32"


** Face width (F) = 1-11/32"

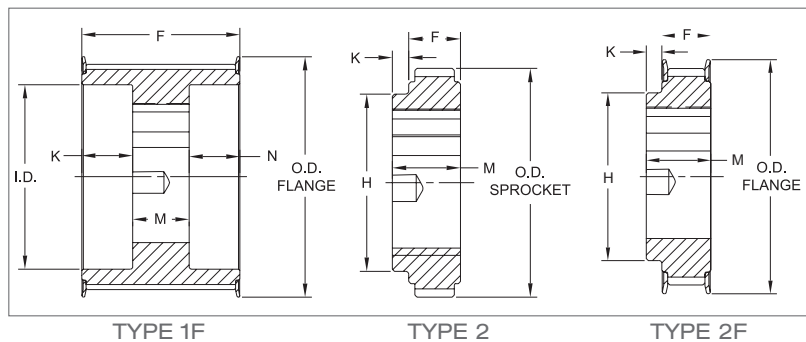

Timing Pulley H Pitch

For Belts 1-1/2" wide - 1/2" pitch (H150) - Face width (F) = 1-3/4"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		K	M	N	H	Min.	Max.	
						Sprocket	Flange									
P14H150-1108	43.20	TPL40	1108	14	2.228	2.174	2.52	1.60	1B F	63/64	25/32	0	...	1/2	1-1/8	0.80
P16H150-1108	47.30	TPL40	1108	16	2.546	2.492	2.77	1.77	1B F	63/64	25/32	0	...	1/2	1-1/8	1.20
P18H150-1210	48.90	TPL40	1210	18	2.865	2.811	3.12	2.24	1B F	25/32	63/64	0	...	1/2	1-1/4	1.30
P20H150-1210	54.50	TPL40	1210	20	3.183	3.129	3.40	2.36	1B F	25/32	63/64	0	...	1/2	1-1/4	1.85
P22H150-1610	61.10	TPL40	1610	22	3.501	3.447	3.70	2.64	1B F	25/32	63/64	0	...	1/2	1-11/16	2.10
P24H150-2012	66.10	TPL40	2012	24	3.820	3.766	4.04	3.13	1B F	19/32	1-3/16	0	...	1/2	2-1/8	2.05
P26H150-2012	73.40	TPL40	2012	26	4.138	4.084	4.41	3.23	1B F	19/32	1-3/16	0	...	1/2	2-1/8	2.80
P28H150-2012	77.50	TPL40	2012	28	4.456	4.402	4.74	3.56	1B F	19/32	1-3/16	0	...	1/2	2-1/8	3.50
P30H150-2012	81.80	TPL40	2012	30	4.775	4.721	5.04	3.86	1B F	19/32	1-3/16	0	...	1/2	2-1/8	4.30
P32H150-2517	82.90	TPL40	2517	32	5.093	5.039	5.32	...	2B F	0	1-49/64	...	...	1/2	2-11/16	4.90
P40H150-2517	107.70	TPL40	2517	40	6.366	6.312	6.63	...	2W F	0	1-49/64	...	...	1/2	2-11/16	8.20
P48H150-2517	138.90	TPL40	2517	48	7.639	7.585	7.87	...	2W F	0	1-49/64	...	...	1/2	2-11/16	11.25
P60H150-3020	153.40	TPL40	3020	60	9.549	9.495	...	...	2W	13/64	1-31/32	...	6-19/64	7/8	3-1/4	10.80
P72H150-3020	193.10	TPL40	3020	72	11.459	11.405	...	...	2W	13/64	1-31/32	...	6-19/64	7/8	3-1/4	25.20
P84H150-3020	240.50	TPL40	3020	84	13.369	13.315	...	...	2W	13/64	1-31/32	...	6-19/64	7/8	3-1/4	32.40
P96H150-3020	304.80	TPL40	3020	96	15.279	15.225	...	...	2A	13/64	1-31/32	...	6-19/64	7/8	3-1/4	31.52
P120H150-3020	499.80	TPL40	3020	120	19.099	19.045	...	...	2A	13/64	1-31/32	...	6-19/64	7/8	3-1/4	46.50

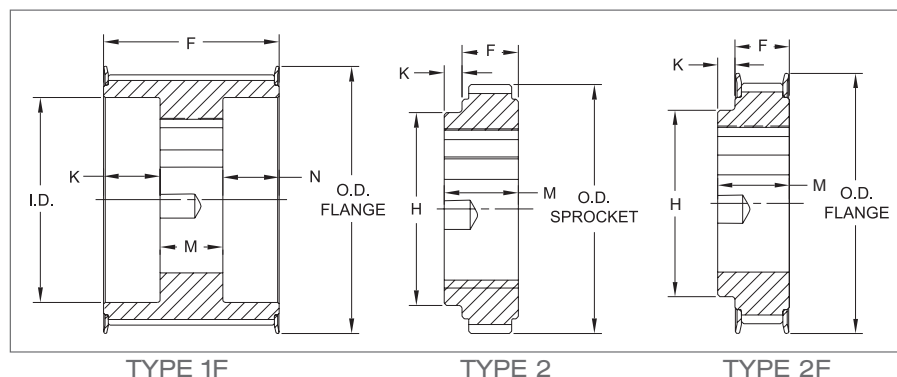


Timing Pulley H Pitch

For Belts 2" wide - 1/2" pitch (H200) - Face width (F) = 2-9/32"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		K	M	N	H	Min.	Max.	
						Sprocket	Flange									
P16H200-1108	60.00	TPL40	1108	16	2.546	2.492	2.77	1.77	1B F	1-1/2	25/32	0	...	1/2	1-1/8	1.50
P18H200-1210	62.70	TPL40	1210	18	2.865	2.811	3.12	2.24	1B F	1-19/64	63/64	0	...	1/2	1-1/4	1.50
P20H200-1210	69.30	TPL40	1210	20	3.183	3.129	3.40	2.36	1B F	1-19/64	63/64	0	...	1/2	1-1/4	2.30
P22H200-1610	71.80	TPL40	1610	22	3.501	3.447	3.70	2.64	1B F	1-19/64	63/64	0	...	1/2	1-11/16	2.55
P24H200-2012	76.60	TPL40	2012	24	3.820	3.766	4.04	3.15	1B F	1-7/64	1-3/16	0	...	1/2	2-1/8	2.45
P26H200-2012	83.20	TPL40	2012	26	4.138	4.084	4.41	3.23	1B F	1-7/64	1-3/16	0	...	1/2	2-1/8	3.40
P28H200-2012	88.90	TPL40	2012	28	4.456	4.402	4.74	3.56	1B F	1-7/64	1-3/16	0	...	1/2	2-1/8	4.15
P30H200-2012	95.00	TPL40	2012	30	4.775	4.721	5.04	3.86	1B F	1-7/64	1-3/16	0	...	1/2	2-1/8	4.90
P32H200-2517	97.90	TPL40	2517	32	5.093	5.039	5.32	4.17	1B F	33/64	1-49/64	0	...	1/2	2-11/16	5.75
P40H200-2517	142.00	TPL40	2517	40	6.366	6.312	6.63	5.43	1W F	33/64	1-49/64	0	...	1/2	2-11/16	9.30
P48H200-3020	191.80	TPL40	3020	48	7.639	7.585	7.87	6.65	1B F	5/16	1-31/32	0	...	7/8	3-1/4	16.40
*P60H200-3020	205.40	TPL40	3020	60	9.549	9.495	...	8.78	1W	25/64	1-31/32	0	...	7/8	3-1/4	20.10
*P72H200-3020	258.40	TPL40	3020	72	11.459	11.405	...	10.62	1W	25/64	1-31/32	0	...	7/8	3-1/4	27.15
*P84H200-3020	292.80	TPL40	3020	84	13.369	13.315	...	12.60	1W	25/64	1-31/32	0	...	7/8	3-1/4	34.62
*P96H200-3535	352.70	TPL40	3535	96	15.279	15.225	...	...	2A	1-9/64	3-1/2	...	7-1/64	1-3/16	3-15/16	43.95
*P120H200-3535	587.70	TPL40	3535	120	19.099	19.045	...	...	2A	1-9/64	3-1/2	...	7-1/64	1-3/16	3-15/16	58.92

*Face width (F) = 2-11/32"

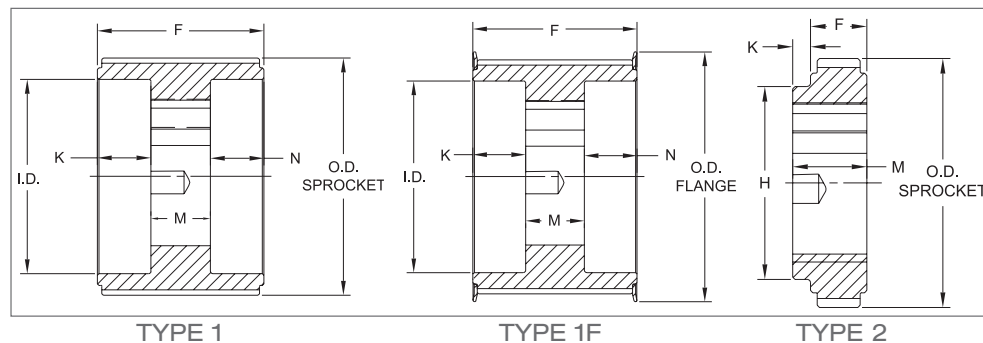


Timing Pulley H Pitch

For Belts 3" wide - 1/2" pitch (H300) - Face width (F) = 3-5/16"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		K	M	N	H	Min.	Max.	
						Sprocket	Flange									
P16H300-1108	79.70	TPL40	1108	16	2.546	2.492	2.77	1.82	1B F	1-17/64	25/32	1-17/64	...	1/2	1-1/8	2.00
P18H300-1210	88.60	TPL40	1210	18	2.865	2.811	3.12	2.24	1B F	1-5/32	63/64	1-5/32	...	1/2	1-1/4	2.05
P20H300-1210	107.70	TPL40	1210	20	3.183	3.129	3.40	2.36	1B F	1-5/32	63/64	1-5/32	...	1/2	1-1/4	3.05
P22H300-1610	106.80	TPL40	1610	22	3.501	3.447	3.70	2.64	1B F	1-5/32	63/64	1-5/32	...	1/2	1-11/16	3.50
P24H300-2012	114.30	TPL40	2012	24	3.820	3.766	4.04	2.95	1B F	1-1/16	1-3/16	1-1/16	...	1/2	2-1/8	4.05
P26H300-2012	120.70	TPL40	2012	26	4.138	4.084	4.41	3.23	1B F	1-1/16	1-3/16	1-1/16	...	1/2	2-1/8	4.60
P28H300-2012	127.30	TPL40	2012	28	4.456	4.402	4.74	3.56	1B F	1-1/16	1-3/16	1-1/16	...	1/2	2-1/8	5.40
P30H300-2012	140.50	TPL40	2012	30	4.775	4.721	5.04	3.86	1B F	1-1/16	1-3/16	1-1/16	...	1/2	2-1/8	6.45
P32H300-2517	148.80	TPL40	2517	32	5.093	5.039	5.32	4.17	1B F	49/64	1-49/64	49/64	...	1/2	2-11/16	7.25
P40H300-2517	184.20	TPL40	2517	40	6.366	6.312	6.63	5.43	1W F	1-17/32	1-49/64	0	...	1/2	2-11/16	11.40
**P48H300-3020	254.90	TPL40	3020	48	7.639	7.585	7.87	6.65	1B F	1-27/64	1-31/32	0	...	7/8	3-1/4	19.25
**P60H300-3020	254.50	TPL40	3020	60	9.549	9.495	...	8.78	1W	1-27/64	1-31/32	0	...	7/8	3-1/4	22.60
**P72H300-3020	332.00	TPL40	3020	72	11.459	11.405	...	10.62	1W	1-27/64	1-31/32	0	...	7/8	3-1/4	30.70
**P84H300-3020	412.60	TPL40	3020	84	13.369	13.315	...	12.60	1W	1-27/64	1-31/32	0	...	7/8	3-1/4	37.45
**P96H300-3535	494.20	TPL40	3535	96	15.279	15.225	...	...	2A	1/8	3-1/2	...	7-1/64	1-3/16	3-15/16	51.84
**P120H300-3535	704.80	TPL40	3535	120	19.099	19.045	...	...	2A	1/8	3-1/2	...	7-1/64	1-3/16	3-15/16	75.08

** Face width (F) = 3-3/8"

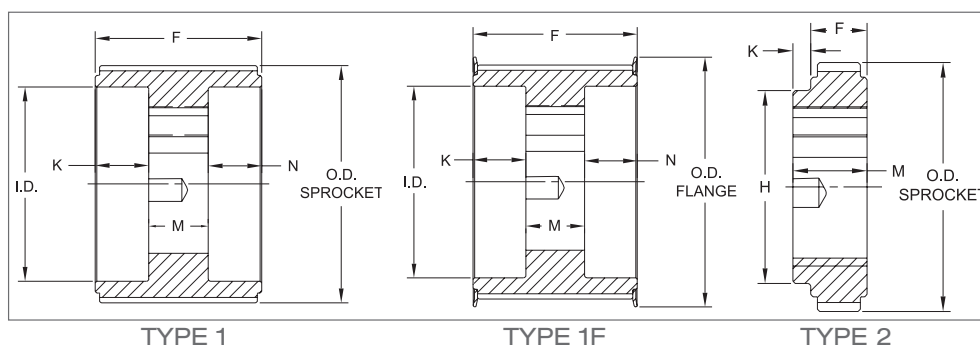

HTD Sprocket



Features: All parts are completely machined in cast iron; some parts made from steel. Positive, non-slip drive. No lubrication necessary, non-stretch. Smooth operation: no chain drive that results in vibration and speed variation. Clean operation, long-life expectancy, low maintenance. Quiet; no metal-to-metal contact

Note: Baldor does not recommend using HTD sprockets with QD bushings that do not have a keyseat. The synchronous sprockets detailed in the following tables are all stock sizes. All dimensions include the sprocket with the QD bushing in place and are in inches.


How to order: Example: P64-8M-50-SK; P64 = Number of teeth (64). 8M = Tooth pitch (8mm). 50 = High torque belt width (50mm). SK = Hub size related to qd bushing.

8 MM Pitch X 20 MM

For Belts 3/4" (20mm) wide - 8mm pitch (8M-20) - Face width (F) = 1-1/8"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		E	K	L	M	Min.	Max.	
						Sprocket	Flange									
*P24-8M-20-JA	53.00	HTD41	JA	24	2.406	2.352	2.60	1.34	1B F	33/64	...	1	41/64	1/2	1-1/4	0.85
P26-8M-20-JA	54.00	HTD41	JA	26	2.607	2.553	2.76	1.34	1B F	33/64	...	1	41/64	1/2	1-1/4	0.95
*P28-8M-20-L	55.00	HTD41	L	28	2.807	2.759	3.11	1.60	1B F	17/32	...	1-11/32	5/16	1/2	1-1/2	1.15
P30-8M-20-L	57.00	HTD41	L	30	3.008	2.958	3.25	1.60	1B F	17/32	...	1-11/32	5/16	1/2	1-1/2	1.40
P32-8M-20-L	59.00	HTD41	L	32	3.208	3.156	3.43	2.56	2B F	5/16	7/32	1-11/32	3/32	1/2	1-1/2	1.35
P34-8M-20-SH	60.00	HTD41	SH	34	3.409	3.355	3.58	2.75	2B F	1/4	3/8	1-1/4	1/8	1/2	1-11/16	1.30
P36-8M-20-SH	62.00	HTD41	SH	36	3.609	3.555	4.02	2.82	2B F	1/4	3/8	1-1/4	1/8	1/2	1-11/16	1.65
P38-8M-20-SH	64.00	HTD41	SH	38	3.810	3.756	4.17	3.00	2B F	1/4	3/8	1-1/4	1/8	1/2	1-11/16	1.85
P40-8M-20-SH	68.00	HTD41	SH	40	4.010	3.956	4.41	3.00	2B F	1/4	3/8	1-1/4	1/8	1/2	1-11/16	2.20
P44-8M-20-SDS	79.00	HTD41	SDS	44	4.411	4.357	4.73	3.50	2B F	5/16	3/8	1-5/16	1/8	1/2	2	2.55
P48-8M-20-SDS	92.00	HTD41	SDS	48	4.812	4.758	5.04	3.80	2B F	5/16	3/8	1-5/16	1/8	1/2	2	3.10
P56-8M-20-SDS	102.00	HTD41	SDS	56	5.614	5.560	5.91	4.60	2W F	5/16	3/8	1-5/16	1/8	1/2	2	4.00
P64-8M-20-SDS	125.00	HTD41	SDS	64	6.416	6.362	6.61	5.40	2W F	7/32	15/32	1-5/16	1/8	1/2	2	5.20
P72-8M-20-SDS	128.00	HTD41	SDS	72	7.218	7.164	7.56	6.20	2W F	7/32	15/32	1-5/16	1/8	1/2	2	7.25
P80-8M-20-SDS	138.00	HTD41	SDS	80	8.020	7.966	8.35	6.90	2W F	7/32	15/32	1-5/16	1/8	1/2	2	8.80
P90-8M-20-SDS	142.00	HTD41	SDS	90	9.023	8.969	...	7.90	2W	5/16	3/8	1-5/16	1/8	1/2	2	11.15

* These parts are made of steel.

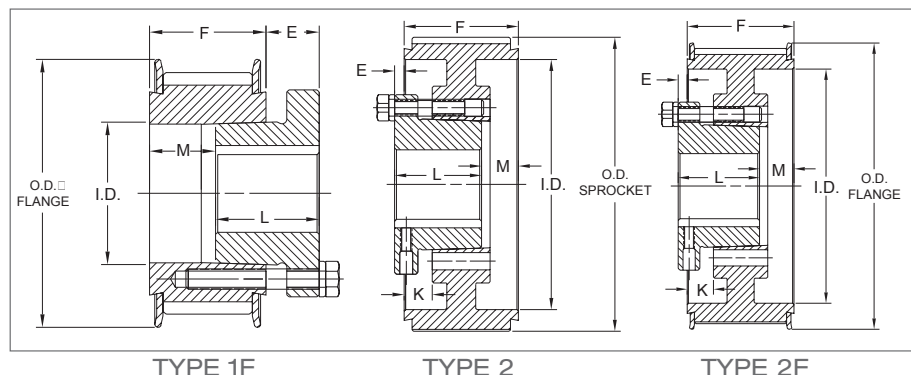


HTD Sprocket 8 MM Pitch X 30 MM

For Belts 1-3/16" (30mm) wide - 8mm pitch (8M-30) - Face width (F) = 1-1/2"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		E	K	L	M	Min.	Max.	
						Sprocket	Flange									
*P24-8M-30-JA	54.00	HTD41	JA	24	2.406	2.352	2.60	1.34	1B F	33/64	...	1	1-1/64	1/2	1-1/4	1.15
P26-8M-30-JA	56.00	HTD41	JA	26	2.607	2.553	2.76	1.34	1B F	33/64	...	1	1-1/64	1/2	1-1/4	1.25
*P28-8M-30-L	59.00	HTD41	L	28	2.807	2.759	3.11	1.60	1B F	17/32	...	1-11/32	11/16	1/2	1-1/2	1.40
P30-8M-30-L	60.00	HTD41	L	30	3.008	2.958	3.25	1.60	1B F	17/32	...	1-11/32	11/16	1/2	1-1/2	1.70
P32-8M-30-L	62.00	HTD41	L	32	3.208	3.156	3.43	2.56	3B F	1/16	19/32	1-11/32	3/32	1/2	1-1/2	1.60
P34-8M-30-SH	63.00	HTD41	SH	34	3.409	3.355	3.58	2.75	3B F	1/8	3/4	1-1/4	1/8	1/2	1-11/16	1.55
P36-8M-30-SH	68.00	HTD41	SH	36	3.609	3.555	4.02	2.82	3B F	1/8	3/4	1-1/4	1/8	1/2	1-11/16	2.00
P38-8M-30-SH	70.00	HTD41	SH	38	3.810	3.756	4.17	3.00	3B F	1/8	3/4	1-1/4	1/8	1/2	1-11/16	2.15
P40-8M-30-SH	78.00	HTD41	SH	40	4.010	3.956	4.41	3.00	3B F	1/8	3/4	1-1/4	1/8	1/2	1-11/16	2.65
P44-8M-30-SDS	86.00	HTD41	SDS	44	4.411	4.357	4.73	3.50	3B F	1/16	3/4	1-5/16	1/8	1/2	2	2.90
P48-8M-30-SDS	93.00	HTD41	SDS	48	4.812	4.758	5.04	3.80	3B F	1/16	3/4	1-5/16	1/8	1/2	2	3.55
P56-8M-30-SDS	104.00	HTD41	SDS	56	5.614	5.560	5.91	4.60	3W F	1/16	3/4	1-5/16	1/8	1/2	2	4.65
P64-8M-30-SK	126.00	HTD41	SK	64	6.416	6.362	6.61	5.40	2B F	15/32	11/32	1-7/8	3/16	1/2	2-5/8	8.45
P72-8M-30-SK	138.00	HTD41	SK	72	7.218	7.164	7.56	6.20	2W F	15/32	11/32	1-7/8	3/16	1/2	2-5/8	8.75
P80-8M-30-SK	142.00	HTD41	SK	80	8.020	7.966	8.35	6.90	2W F	15/32	11/32	1-7/8	3/16	1/2	2-5/8	10.80
P90-8M-30-SK	146.00	HTD41	SK	90	9.023	8.969	...	7.90	2W	9/16	1/4	1-7/8	3/16	1/2	2-5/8	13.00
P112-8M-30-SK	186.00	HTD41	SK	112	11.229	11.175	...	10.00	2A	9/16	1/4	1-7/8	3/16	1/2	2-5/8	14.25


* These parts are made of steel.

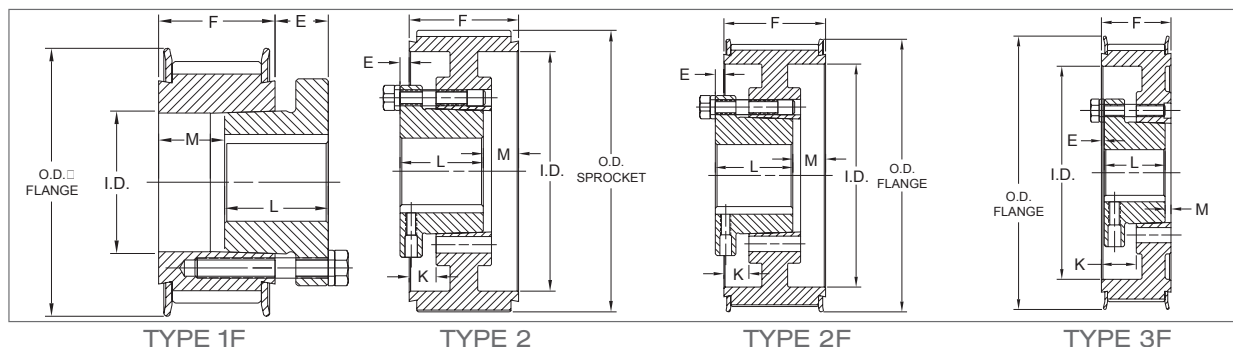

HTD Sprocket 8 MM Pitch X 50 MM

For Belts 2" (50mm) wide - 8mm pitch (8M-50) - Face width (F) = 2-3/8"


Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		E	K	L	M	Min.	Max.	
						Sprocket	Flange									
P28-8M-50-JA	80.00	HTD41	JA	28	2.807	2.759	3.11	2.09	3B F	31/64	1	1	57/64	1/2	1-1/4	1.60
P30-8M-50-JA	82.00	HTD41	JA	30	3.008	2.958	3.25	2.18	3B F	31/64	1	1	57/64	1/2	1-1/4	1.95
P32-8M-50-L	83.00	HTD41	L	32	3.208	3.156	3.43	2.56	3B F	11/32	7/8	1-11/32	11/16	1/2	1-1/2	2.05
P34-8M-50-SH	84.00	HTD41	SH	34	3.409	3.355	3.58	2.75	2B F	1/8	1/2	1-1/4	1-1/4	1/2	1-11/16	2.00
P36-8M-50-SH	85.00	HTD41	SH	36	3.609	3.555	4.02	2.82	2B F	1/8	1/2	1-1/4	1-1/4	1/2	1-11/16	2.65
P38-8M-50-SH	86.00	HTD41	SH	38	3.810	3.756	4.17	3.00	2B F	1/8	1/2	1-1/4	1-1/4	1/2	1-11/16	2.85
P40-8M-50-SH	88.00	HTD41	SH	40	4.010	3.956	4.41	3.00	2B F	1/8	1/2	1-1/4	1-1/4	1/2	1-11/16	3.60
P44-8M-50-SD	94.00	HTD41	SD	44	4.411	4.357	4.73	3.50	2B F	1/8	9/16	1-13/16	11/16	1/2	2	4.55
P48-8M-50-SD	98.00	HTD41	SD	48	4.812	4.758	5.04	3.80	2B F	1/8	9/16	1-13/16	11/16	1/2	2	5.80
P56-8M-50-SK	115.00	HTD41	SK	56	5.614	5.560	5.91	4.60	2B F	1/4	9/16	1-7/8	3/4	1/2	2-5/8	7.30
P64-8M-50-SK	130.00	HTD41	SK	64	6.416	6.362	6.61	5.40	2W F	13/64	39/64	1-7/8	51/64	1/2	2-5/8	8.60
P72-8M-50-SK	144.00	HTD41	SK	72	7.218	7.164	7.56	6.20	2W F	13/64	39/64	1-7/8	51/64	1/2	2-5/8	10.70
P80-8M-50-SF	155.00	HTD41	SF	80	8.020	7.966	8.35	6.90	2W F	13/64	39/64	2	43/64	1/2	2-15/16	14.15
P90-8M-50-SF	186.00	HTD41	SF	90	9.023	8.969	...	7.90	2W	1/4	9/16	2	5/8	1/2	2-15/16	16.70
P112-8M-50-SF	234.00	HTD41	SF	112	11.229	11.175	...	10.00	2A	1/4	9/16	2	5/8	1/2	2-15/16	21.65
P144-8M-50-E	373.00	HTD41	E	144	14.437	14.383	...	13.20	2A	11/16	3/8	2-5/8	7/16	7/8	3-1/2	31.75
P192-8M-50-E	432.00	HTD41	E	192	19.249	19.195	...	18.00	2A	11/16	3/8	2-5/8	7/16	7/8	3-1/2	50.80

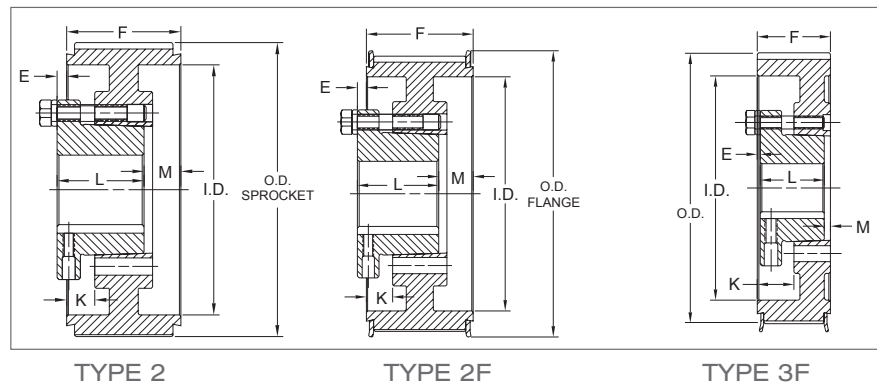

HTD Sprocket 8 mm PITCH X 85 MM

For Belts 3-5/16" (85mm) wide - 8mm pitch (8M-85) - Face width (F) = 3-3/4"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		E	K	L	M	Min.	Max.	
						Sprocket	Flange									
P34-8M-85-SH	95.00	HTD41	SH	34	3.409	3.355	3.58	2.75	3B F	7/8	1-1/2	1-1/4	1-5/8	1/2	1-11/16	2.85
P36-8M-85-SH	100.00	HTD41	SH	36	3.609	3.555	4.02	2.82	3B F	7/8	1-1/2	1-1/4	1-5/8	1/2	1-11/16	3.75
P38-8M-85-SH	102.00	HTD41	SH	38	3.810	3.756	4.17	3.00	3B F	7/8	1-1/2	1-1/4	1-5/8	1/2	1-11/16	4.05
P40-8M-85-SD	106.00	HTD41	SD	40	4.010	3.956	4.41	3.29	3B F	9/16	1-1/4	1-13/16	1-3/8	1/2	2	4.50
P44-8M-85-SD	110.00	HTD41	SD	44	4.411	4.357	4.73	3.50	3B F	9/16	1-1/4	1-13/16	1-3/8	1/2	2	6.15
P48-8M-85-SD	120.00	HTD41	SD	48	4.812	4.758	5.04	3.80	3B F	9/16	1-1/4	1-13/16	1-3/8	1/2	2	7.60
P56-8M-85-SK	140.00	HTD41	SK	56	5.614	5.560	5.91	4.60	3B F	7/16	1-1/4	1-7/8	1-7/16	1/2	2-5/8	9.65
P64-8M-85-SF	163.00	HTD41	SF	64	6.416	6.362	6.61	5.40	3B F	31/64	1-19/64	2	1-23/64	1/2	2-5/8	12.20
P72-8M-85-E	177.00	HTD41	E	72	7.218	7.164	7.56	6.20	3B F	3/64	1-7/64	2-5/8	1-11/64	7/8	3-1/2	16.10
P80-8M-85-E	194.00	HTD41	E	80	8.020	7.966	8.35	6.90	3B F	3/64	1-7/64	2-5/8	1-11/64	7/8	3-1/2	21.25
P90-8M-85-E	245.00	HTD41	E	90	9.023	8.969	...	7.90	3W	0	1-1/16	2-5/8	1-1/16	7/8	3-1/2	22.90
P112-8M-85-F	308.00	HTD41	F	112	11.229	11.175	...	10.00	2W	19/32	5/8	3-5/8	23/32	1	4	40.55
P144-8M-85-F	430.00	HTD41	F	144	14.437	14.383	...	13.20	2A	19/32	5/8	3-5/8	23/32	1	4	47.30
P192-8M-85-F	485.00	HTD41	F	192	19.249	19.195	...	18.00	2A	19/32	5/8	3-5/8	23/32	1	4	68.80

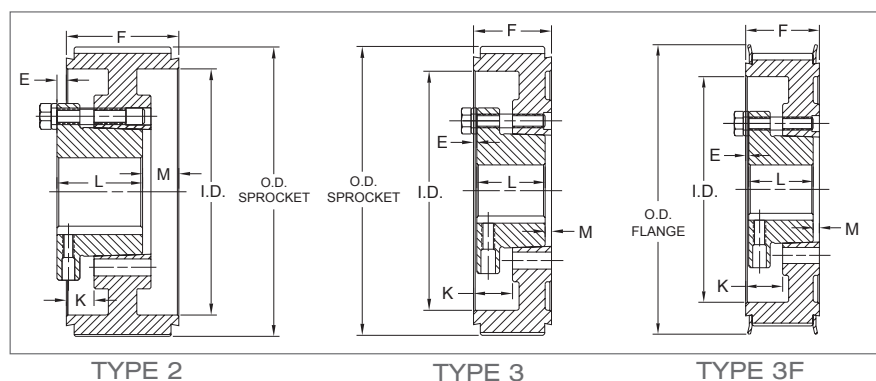


HTD Sprocket

14 mm Pitch X 40 MM

For Belts 1-1/2" (40mm) wide - 14mm pitch (14M-40) - Face width (F) = 2-1/8"


Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		E	K	L	M	Min.	Max.	
						Sprocket	Flange									
P28-14M-40-SK	85.00	HTD41	SK	28	4.912	4.802	5.04	3.13	1B F	13/16	0	1-7/8	1-1/16	1/2	2-5/8	5.30
P29-14M-40-SK	90.00	HTD41	SK	29	5.088	4.978	5.43	3.13	1B F	13/16	0	1-7/8	1-1/16	1/2	2-5/8	6.00
P30-14M-40-SK	93.00	HTD41	SK	30	5.263	5.153	5.43	4.12	2B F	3/8	7/16	1-7/8	5/8	1/2	2-5/8	5.85
P32-14M-40-SK	102.00	HTD41	SK	32	5.614	5.504	6.06	4.12	2B F	3/8	7/16	1-7/8	5/8	1/2	2-5/8	7.10
P34-14M-40-SK	105.00	HTD41	SK	34	5.965	5.855	6.30	4.12	2B F	3/8	7/16	1-7/8	5/8	1/2	2-5/8	8.55
P36-14M-40-SF	115.00	HTD41	SF	36	6.316	6.206	6.61	4.75	2B F	3/8	7/16	2	1/2	1/2	2-15/16	8.50
P38-14M-40-SF	130.00	HTD41	SF	38	6.667	6.557	7.21	4.94	2B F	3/8	7/16	2	1/2	1/2	2-15/16	10.20
P40-14M-40-SF	130.00	HTD41	SF	40	7.018	6.908	7.40	5.06	2B F	3/8	7/16	2	1/2	1/2	2-15/16	11.75
P44-14M-40-E	155.00	HTD41	E	44	7.720	7.610	8.31	6.12	2B F	13/16	1/4	2-5/8	5/16	7/8	3-1/2	14.80
P48-14M-40-E	165.00	HTD41	E	48	8.421	8.311	8.90	6.50	2B F	13/16	1/4	2-5/8	5/16	7/8	3-1/2	18.65
P52-14M-40-E	172.00	HTD41	E	52	9.123	9.013	9.37	7.18	2B F	13/16	1/4	2-5/8	5/16	7/8	3-1/2	22.70
P56-14M-40-E	175.00	HTD41	E	56	9.825	9.715	10.08	7.88	2B F	13/16	1/4	2-5/8	5/16	7/8	3-1/2	27.25
P60-14M-40-E	227.00	HTD41	E	60	10.527	10.417	10.79	8.50	2B F	13/16	1/4	2-5/8	5/16	7/8	3-1/2	32.10
P64-14M-40-E	260.00	HTD41	E	64	11.229	11.119	11.65	9.25	2W F	13/16	1/4	2-5/8	5/16	7/8	3-1/2	29.20
P68-14M-40-E	265.00	HTD41	E	68	11.930	11.820	12.21	10.00	2W F	13/16	1/4	2-5/8	5/16	7/8	3-1/2	31.55
P72-14M-40-E	272.00	HTD41	E	72	12.632	12.522	12.91	10.69	2W F	13/16	1/4	2-5/8	5/16	7/8	3-1/2	35.25
P80-14M-40-E	280.00	HTD41	E	80	14.036	13.926	14.29	12.13	2W F	13/16	1/4	2-5/8	5/16	7/8	3-1/2	14.40
P90-14M-40-E	288.00	HTD41	E	90	15.790	15.680	...	14.00	2A	13/16	1/4	2-5/8	5/16	7/8	3-1/2	40.70
P112-14M-40-E	365.00	HTD41	E	112	19.650	19.540	...	17.80	2A	13/16	1/4	2-5/8	5/16	7/8	3-1/2	56.40
P144-14M-40-E	480.00	HTD41	E	144	25.264	25.154	...	23.38	2A	13/16	1/4	2-5/8	5/16	7/8	3-1/2	78.60

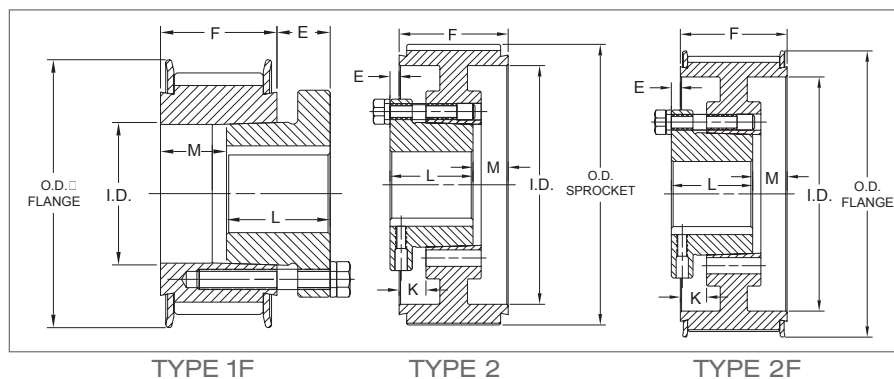

HTD Sprocket 14 mm Pitch X 55 MM

For Belts 2-3/16" (55mm) wide - 14mm pitch (14M-55) - Face width (F) = 2-3/4"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		E	K	L	M	Min.	Max.	
						Sprocket	Flange									
P28-14M-55-SK	100.00	HTD41	SK	28	4.912	4.802	5.04	3.13	1B F	13/16	0	1-7/8	1-11/16	1/2	2-5/8	6.85
P29-14M-55-SK	105.00	HTD41	SK	29	5.088	4.978	5.43	3.13	1B F	13/16	0	1-7/8	1-11/16	1/2	2-5/8	7.55
P30-14M-55-SK	108.00	HTD41	SK	30	5.263	5.153	5.43	4.12	2B F	1/16	3/4	1-7/8	15/16	1/2	2-5/8	6.15
P32-14M-55-SK	114.00	HTD41	SK	32	5.614	5.504	6.06	4.12	2B F	1/16	3/4	1-7/8	15/16	1/2	2-5/8	8.65
P34-14M-55-SK	120.00	HTD41	SK	34	5.965	5.855	6.30	4.12	2B F	1/16	3/4	1-7/8	15/16	1/2	2-5/8	10.50
P36-14M-55-SF	125.00	HTD41	SF	36	6.316	6.206	6.61	4.75	2B F	1/16	3/4	2	13/16	1/2	2-15/16	10.10
P38-14M-55-SF	140.00	HTD41	SF	38	6.667	6.557	7.21	4.94	2B F	1/16	3/4	2	13/16	1/2	2-15/16	12.05
P40-14M-55-SF	143.00	HTD41	SF	40	7.018	6.908	7.40	5.06	2B F	1/16	3/4	2	13/16	1/2	2-15/16	14.30
P44-14M-55-E	165.00	HTD41	E	44	7.720	7.610	8.31	6.12	2B F	1/2	9/16	2-5/8	5/8	7/8	3-1/2	16.65
P48-14M-55-E	170.00	HTD41	E	48	8.421	8.311	8.90	6.50	2B F	1/2	9/16	2-5/8	5/8	7/8	3-1/2	21.65
P52-14M-55-E	178.00	HTD41	E	52	9.123	9.013	9.37	7.18	2B F	1/2	9/16	2-5/8	5/8	7/8	3-1/2	25.80
P56-14M-55-E	180.00	HTD41	E	56	9.825	9.715	10.08	7.88	2B F	1/2	9/16	2-5/8	5/8	7/8	3-1/2	31.00
P60-14M-55-E	240.00	HTD41	E	60	10.527	10.417	10.79	8.50	2B F	1/2	9/16	2-5/8	5/8	7/8	3-1/2	36.05
P64-14M-55-F	275.00	HTD41	F	64	11.229	11.119	11.65	9.25	2B F	1-3/32	1/8	3-5/8	7/32	1	4	10.25
P68-14M-55-F	285.00	HTD41	F	68	11.930	11.820	12.21	10.00	2W F	1-3/32	1/8	3-5/8	7/32	1	4	44.00
P72-14M-55-F	290.00	HTD41	F	72	12.632	12.522	12.91	10.69	2W F	1-3/32	1/8	3-5/8	7/32	1	4	46.70
P80-14M-55-F	338.00	HTD41	F	80	14.036	13.926	14.29	12.13	2W F	1-3/32	1/8	3-5/8	7/32	1	4	54.50
P90-14M-55-F	345.00	HTD41	F	90	15.790	15.680	...	14.00	2A	1-3/32	1/8	3-5/8	7/32	1	4	53.30
P112-14M-55-F	405.00	HTD41	F	112	19.650	19.540	...	17.80	2A	1-3/32	1/8	3-5/8	7/32	1	4	70.70
P144-14M-55-F	520.00	HTD41	F	144	25.264	25.154	...	23.38	2A	1-3/32	1/8	3-5/8	7/32	1	4	95.90
P168-14M-55-F	670.00	HTD41	F	168	29.475	29.365	...	28.25	2A	1-3/32	1/8	3-5/8	7/32	1	4	107.30
P192-14M-55-F	840.00	HTD41	F	192	33.686	33.576	...	32.38	2A	1-3/32	1/8	3-5/8	7/32	1	4	136.20
P216-14M-55-F	1356.00	HTD41	F	216	37.896	37.786	...	36.62	2A	1-3/32	1/8	3-5/8	7/32	1	4	166.20

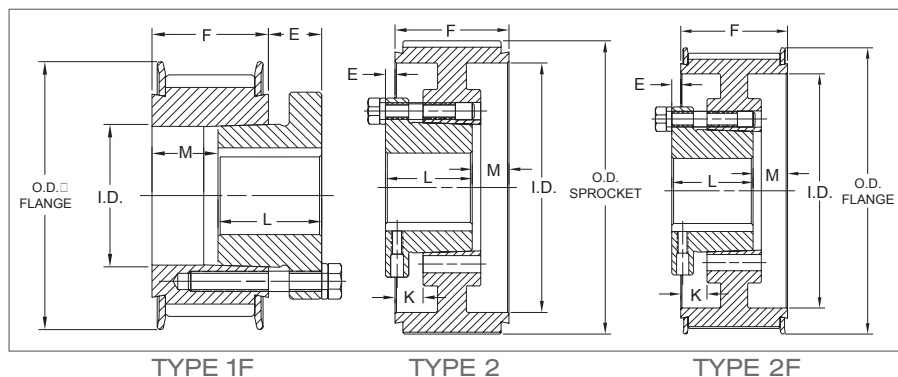


HTD Sprocket 14 mm Pitch X 85 MM

For Belts 3-5/16" (85mm) wide - 14mm pitch (14M-85) - Face width (F) = 4"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		E	K	L	M	Min.	Max.	
						Sprocket	Flange									
*P28-14M-85-SK	130.00	HTD41	SK	28	4.912	4.802	5.04	3.96	3B F	3/16	1	1-7/8	1-15/16	1/2	2-5/8	6.60
*P29-14M-85-SK	131.00	HTD41	SK	29	5.088	4.978	5.43	3.96	3B F	3/16	1	1-7/8	1-15/16	1/2	2-5/8	7.80
P30-14M-85-SK	132.00	HTD41	SK	30	5.263	5.153	5.43	4.12	3B F	9/16	1-3/8	1-7/8	1-9/16	1/2	2-5/8	7.95
P32-14M-85-SK	138.00	HTD41	SK	32	5.614	5.504	6.06	4.12	3B F	9/16	1-3/8	1-7/8	1-9/16	1/2	2-5/8	10.75
P34-14M-85-SK	150.00	HTD41	SK	34	5.965	5.855	6.30	4.12	3B F	9/16	1-3/8	1-7/8	1-9/16	1/2	2-5/8	14.00
P36-14M-85-SF	154.00	HTD41	SF	36	6.316	6.206	6.61	4.75	3B F	9/16	1-3/8	2	1-7/16	1/2	2-15/16	13.20
P38-14M-85-SF	160.00	HTD41	SF	38	6.667	6.557	7.21	4.94	3B F	9/16	1-3/8	2	1-7/16	1/2	2-15/16	15.60
P40-14M-85-SF	168.00	HTD41	SF	40	7.018	6.908	7.40	5.06	3B F	9/16	1-3/8	2	1-7/16	1/2	2-15/16	19.00
P44-14M-85-E	180.00	HTD41	E	44	7.720	7.610	8.31	6.12	3B F	1/8	1-3/16	2-5/8	1-1/4	7/8	3-1/2	21.10
P48-14M-85-E	188.00	HTD41	E	48	8.421	8.311	8.90	6.50	3B F	1/8	1-3/16	2-5/8	1-1/4	7/8	3-1/2	27.35
P52-14M-85-E	220.00	HTD41	E	52	9.123	9.013	9.37	7.18	3B F	1/8	1-3/16	2-5/8	1-1/4	7/8	3-1/2	32.80
P56-14M-85-F	245.00	HTD41	F	56	9.825	9.715	10.08	7.88	2B F	15/32	3/4	3-5/8	27/32	1	4	43.30
P60-14M-85-F	290.00	HTD41	F	60	10.527	10.417	10.79	8.50	2B F	15/32	3/4	3-5/8	27/32	1	4	50.70
P64-14M-85-F	300.00	HTD41	F	64	11.229	11.119	11.65	9.25	2B F	15/32	3/4	3-5/8	27/32	1	4	59.90
P68-14M-85-F	315.00	HTD41	F	68	11.930	11.820	12.21	10.00	2W F	15/32	3/4	3-5/8	27/32	1	4	51.20
P72-14M-85-F	320.00	HTD41	F	72	12.632	12.522	12.91	10.69	2W F	15/32	3/4	3-5/8	27/32	1	4	55.70
P80-14M-85-F	380.00	HTD41	F	80	14.036	13.926	14.29	12.13	2W F	15/32	3/4	3-5/8	27/32	1	4	64.40
P90-14M-85-F	390.00	HTD41	F	90	15.790	15.680	...	14.00	2A	15/32	3/4	3-5/8	27/32	1	4	69.50
P112-14M-85-F	460.00	HTD41	F	112	19.650	19.540	...	17.80	2A	15/32	3/4	3-5/8	27/32	1	4	93.70
P144-14M-85-F	590.00	HTD41	F	144	25.264	25.154	...	23.38	2A	15/32	3/4	3-5/8	27/32	1	4	130.50
P168-14M-85-F	780.00	HTD41	F	168	29.475	29.265	...	28.12	2A	3/4	11/16	3-5/8	1-3/32	1	4	144.00
P168-14M-85-J	780.00	HTD41	J	168	29.475	29.365	...	28.12	2A	1	13/32	4-1/2	1/2	1-7/16	4-1/2	153.20
P192-14M-85-J	940.00	HTD41	J	192	33.686	33.576	...	32.38	2A	1	13/32	4-1/2	1/2	1-7/16	4-1/2	190.20
P216-14M-85-J	1470.00	HTD41	J	216	37.896	37.786	...	36.38	2A	1	13/32	4-1/2	1/2	1-7/16	4-1/2	242.80

* These parts are made of steel.

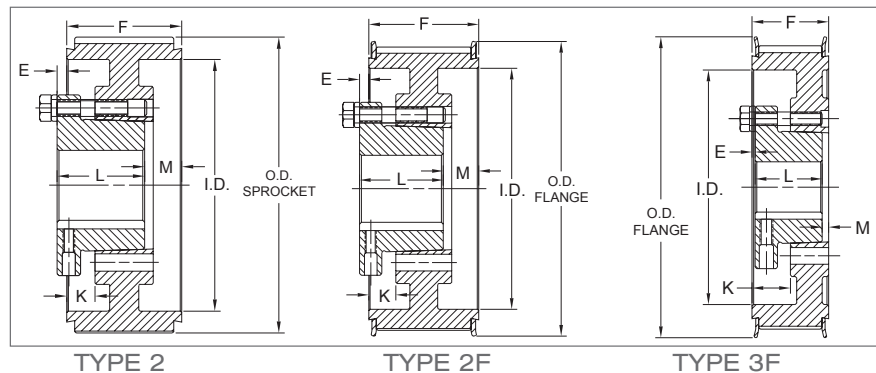


HTD Sprocket 14 mm Pitch X 115 MM

For Belts 4-1/2" (115mm) wide - 14mm pitch (14M-115) - Face width (F) = 5-1/4"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		E	K	L	M	Min.	Max.	
						Sprocket	Flange									
*P28-14M-115-SK	160.00	HTD41	SK	28	4.912	4.802	5.04	3.96	3B F	3/16	1	1-7/8	3-3/16	1/2	2-5/8	12.00
*P29-14M-115-SK	165.00	HTD41	SK	29	5.088	4.978	5.43	3.96	3B F	3/16	1	1-7/8	3-3/16	1/2	2-5/8	13.60
P30-14M-115-SK	169.00	HTD41	SK	30	5.263	5.153	5.43	4.12	3B F	1-3/16	2	1-7/8	2-3/16	1/2	2-5/8	9.35
P32-14M-115-SK	172.00	HTD41	SK	32	5.614	5.504	6.06	4.12	3B F	1-3/16	2	1-7/8	2-3/16	1/2	2-5/8	13.25
P34-14M-115-SK	183.00	HTD41	SK	34	5.965	5.855	6.30	4.12	3B F	1-3/16	2	1-7/8	2-3/16	1/2	2-5/8	17.30
P36-14M-115-SF	190.00	HTD41	SF	36	6.316	6.206	6.61	4.75	3B F	1-3/16	2	2	2-1/16	1/2	2-15/16	16.55
P38-14M-115-SF	200.00	HTD41	SF	38	6.667	6.557	7.21	4.94	3B F	1-3/16	2	2	2-1/16	1/2	2-15/16	19.70
P40-14M-115-SF	208.00	HTD41	SF	40	7.018	6.908	7.40	5.06	3B F	1-3/16	2	2	2-1/16	1/2	2-15/16	23.55
P44-14M-115-E	220.00	HTD41	E	44	7.720	7.610	8.31	6.12	3B F	3/4	1-13/16	2-5/8	1-7/8	7/8	3-1/2	24.95
P48-14M-115-E	236.00	HTD41	E	48	8.421	8.311	8.90	6.50	3B F	3/4	1-13/16	2-5/8	1-7/8	7/8	3-1/2	33.25
P52-14M-115-F	275.00	HTD41	F	52	9.123	9.013	9.37	7.18	3B F	5/32	1-3/8	3-5/8	1-15/32	1	4	42.10
P56-14M-115-F	285.00	HTD41	F	56	9.825	9.715	10.08	7.88	3B F	5/32	1-3/8	3-5/8	1-15/32	1	4	49.70
P60-14M-115-F	340.00	HTD41	F	60	10.527	10.417	10.79	8.50	3B F	5/32	1-3/8	3-5/8	1-15/32	1	4	58.50
P64-14M-115-J	365.00	HTD41	J	64	11.229	11.119	11.65	9.25	2B F	13/32	1	4-1/2	1-5/32	1-7/16	4-1/2	71.20
P68-14M-115-J	382.00	HTD41	J	68	11.930	11.820	12.21	10.00	2B F	13/32	1	4-1/2	1-5/32	1-7/16	4-1/2	82.10
P72-14M-115-J	390.00	HTD41	J	72	12.632	12.522	12.91	10.69	2B F	13/32	1	4-1/2	1-5/32	1-7/16	4-1/2	94.00
P80-14M-115-J	450.00	HTD41	J	80	14.036	13.926	14.29	12.13	2W F	13/32	1	4-1/2	1-5/32	1-7/16	4-1/2	79.80
P90-14M-115-J	500.00	HTD41	J	90	15.790	15.680	...	14.00	2W	13/32	1	4-1/2	1-5/32	1-7/16	4-1/2	93.60
P112-14M-115-J	620.00	HTD41	J	112	19.650	19.540	...	17.80	2A	13/32	1	4-1/2	1-5/32	1-7/16	4-1/2	117.20
P144-14M-115-J	780.00	HTD41	J	144	25.264	25.154	...	23.38	2A	13/32	1	4-1/2	1-5/32	1-7/16	4-1/2	161.70
P168-14M-115-J	970.00	HTD41	J	168	29.475	29.365	...	28.09	2A	9/64	1	4-1/2	7/8	1-1/2	4-1/2	198.00
P168-14M-115-M	970.00	HTD41	M	168	29.475	29.365	...	28.09	2A	1-19/32	1/16	6-3/4	3/32	2	5-1/2	203.40
P192-14M-115-M	1120.00	HTD41	M	192	33.686	33.576	...	32.25	2A	1-19/32	1/16	6-3/4	3/32	2	5-1/2	251.10
P216-14M-115-M	1690.00	HTD41	M	216	37.896	37.786	...	36.38	2A	1-19/32	1/16	6-3/4	3/32	2	5-1/2	306.70


* These parts are made of steel.

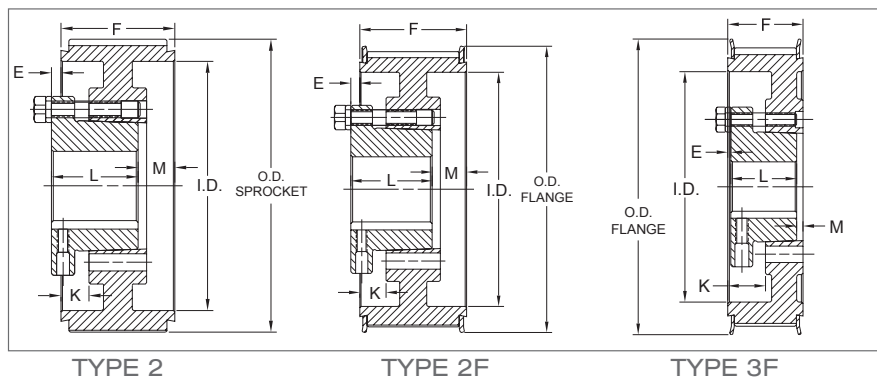

HTD Sprocket 14 mm Pitch X 170 MM

For Belts 6-11/16" (170mm) wide - 14mm pitch (14M-170) - Face width (F) = 7-3/8"

Part Number	List Price	Mult. Sym.	Bushing	Number of Teeth	Diameters				Type	Dimensions (inches)				Bore Range		Approx. Wt. (lbs)
					Pitch Diam.	O.D.		I.D.		E	K	L	M	Min.	Max.	
						Sprocket	Flange									
P36-14M-170-SF	270.00	HTD41	SF	36	6.316	6.206	6.61	4.75	3B F	2-1/4	3-1/16	2	3-1/8	1/2	2-15/16	21.70
P38-14M-170-SF	280.00	HTD41	SF	38	6.667	6.557	7.21	4.94	3B F	2-1/4	3-1/16	2	3-1/8	1/2	2-15/16	25.90
P40-14M-170-SF	290.00	HTD41	SF	40	7.018	6.908	7.40	5.06	3B F	2-1/4	3-1/16	2	3-1/8	1/2	2-15/16	31.20
P44-14M-170-E	300.00	HTD41	E	44	7.720	7.610	8.31	6.12	3B F	1-13/16	2-7/8	2-5/8	2-15/16	7/8	3-1/2	31.65
P48-14M-170-E	302.00	HTD41	E	48	8.421	8.311	8.91	6.50	3B F	1-13/16	2-7/8	2-5/8	2-15/16	7/8	3-1/2	42.30
P52-14M-170-F	320.00	HTD41	F	52	9.123	9.013	9.37	7.18	3B F	1-7/32	2-7/16	3-5/8	2-17/32	1	4	52.40
P56-14M-170-F	330.00	HTD41	F	56	9.825	9.715	10.08	7.88	3B F	1-7/32	2-7/16	3-5/8	2-17/32	1	4	61.40
P60-14M-170-J	430.00	HTD41	J	60	10.527	10.417	10.79	8.50	3B F	23/32	2-1/8	4-1/2	2-5/32	1-7/16	4-1/2	74.30
P64-14M-170-J	460.00	HTD41	J	64	11.229	11.119	11.65	9.25	3B F	23/32	2-1/8	4-1/2	2-5/32	1-7/16	4-1/2	85.10
P68-14M-170-J	490.00	HTD41	J	68	11.930	11.820	12.21	10.00	3B F	23/32	2-1/8	4-1/2	2-5/32	1-7/16	4-1/2	96.50
P72-14M-170-J	520.00	HTD41	J	72	12.632	12.522	12.91	10.69	3B F	23/32	2-1/8	4-1/2	2-5/32	1-7/16	4-1/2	109.40
P80-14M-170-J	530.00	HTD41	J	80	14.036	13.926	14.29	12.13	3W F	23/32	2-1/8	4-1/2	2-5/32	1-7/16	4-1/2	102.00
P90-14M-170-J	610.00	HTD41	J	90	15.790	15.680	...	14.00	3W	23/32	2-1/8	4-1/2	2-5/32	1-7/16	4-1/2	114.70
P112-14M-170-M	850.00	HTD41	M	112	19.650	19.540	...	17.80	2A	7/32	1-7/16	6-3/4	27/32	2	5-1/2	170.60
P144-14M-170-M	1050.00	HTD41	M	144	25.264	25.154	...	23.38	2A	7/32	1-7/16	6-3/4	27/32	2	5-1/2	230.80
P168-14M-170-M	1360.00	HTD41	M	168	29.475	29.365	...	28.09	2A	7/32	1-7/16	6-3/4	27/32	2	5-1/2	232.80
P192-14M-170-M	1460.00	HTD41	M	192	33.686	33.576	...	32.25	2A	7/32	1-7/16	6-3/4	27/32	2	5-1/2	285.00
P216-14M-170-M	2080.00	HTD41	M	216	37.896	37.786	...	36.38	2A	7/32	1-7/16	6-3/4	27/32	2	5-1/2	348.10

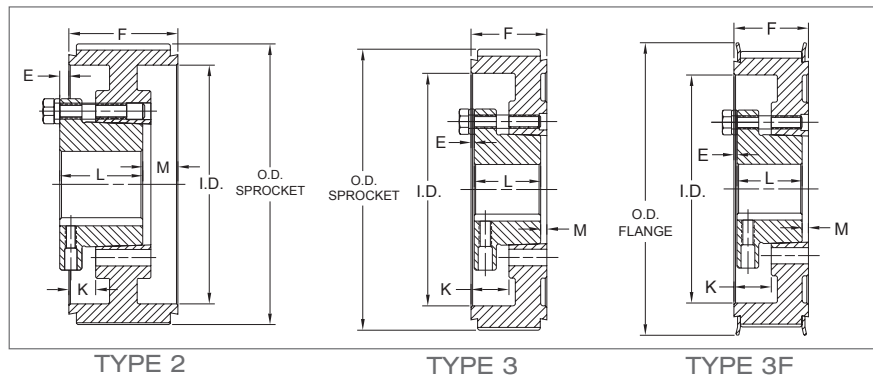


MASKA STARFLEX: Elastomeric Jaw Type Couplings

Features: All parts are completely machined in cast iron. Interchangeable by part number and size with corresponding components. Four types of insert materials for various applications in varying temperatures and environments.

How to order STOCK BORE COUPLING: Example: L099X5/8; L099 = MASKA STARFLEX Hub size. X5/8 = Bore size (5/8"). Metric bore sizes are designated with "MM" after the metric dimension (X 25MM).

ELEMENT MATERIAL Example: L099-100H = MASKA STARFLEX element size (insert) H = Material (Hytrel). To order a complete coupling, (2) hubs with appropriate bore and (1) insert have to be ordered.



Dimensions

Hub No.	List Price		Mult. Sym.	Type	Outside Diameter A	Hub Diameter HD	Overall Length B	Distance between flanges C	Length thru bore D	** Bore		Assy Wt. Lbs. (Avg)	Approx. WR ² (lbs-in ²)
	Imperial (IN)	Metric (MM)								Min.	Max.		
L035 *	13.00	-	CPL32	1	5/8	-	13/16	9/32	17/64	1/8 (4mm)	3/8 (8mm)	0.10	0.003
L050 *	13.00	15.60	CPL32	1	1-1/16	-	1-23/32	15/32	5/8	3/16 (5mm)	5/8 (16mm)	0.25	0.054
L070	5.05	6.06	CPL32	1	1-3/8	-	2	1/2	3/4	3/16 (7mm)	3/4 (19mm)	0.50	0.115
L075	5.80	6.96	CPL32	1	1-3/4	-	2-1/8	1/2	13/16	3/16 (9mm)	7/8 (22mm)	0.90	0.388
L090	8.90	10.68	CPL32	1	2-1/8	-	2-9/64	33/64	13/16	3/16 (8mm)	1 (25mm)	1.35	0.772
L095	13.70	16.44	CPL32	1	2-1/8	-	2-33/64	33/64	1	7/16 (11mm)	1-1/8 (28mm)	1.55	0.890
L099	17.30	20.76	CPL32	1	2-17/32	-	2-27/32	23/32	1-1/16	7/16 (14mm)	1-3/16 (30mm)	2.25	2.048
L100	25.60	30.72	CPL32	1	2-17/32	-	3-15/32	23/32	1-3/8	7/16 (12mm)	1-3/8 (35mm)	2.80	2.783
L110	35.00	42.00	CPL32	1	3-5/16	-	4-1/4	7/8	1-11/16	5/8 (16mm)	1-5/8 (42mm)	5.95	8.993
L150	44.80	53.76	CPL32	1	3-3/4	-	4-1/2	1	1-3/4	5/8 (16mm)	1-7/8 (48mm)	7.90	11.477
L190	70.00	84.00	CPL32	2	4-1/2	4	5	1	2	3/4 (19mm)	2-1/8 (55mm)	13.80	39.256
L225	85.00	102.00	CPL32	2	5	4-1/4	5-3/8	1	2-3/16	3/4 (30mm)	2-5/8 (65mm)	17.30	65.000


*Important: NOT SOLD INDIVIDUALLY. These parts are packaged 4 to a box, order per multiple of 4.

**See Baldor•Maska® Product Catalog for Stock bores.


Insert Elements

NBR (Rubber)			Urethane		Hytrel		Wt. lbs.	Bronze		
Part Number	Mult. Sym.	List Price	Part No.	List Price	Part No.	List Price		Part No.	List Price	Approx. Wt. (lbs.)
L035N* (4)	CPL32	8.40	-	-	-	-	.01	-	-	-
L050N* (4)	CPL32	8.40	L050U* (4)	34.00	L050H* (4)	28.40	.01	L050B* (4)	47.60	.06
L070N	CPL32	3.00	L070U	5.90	L070H	10.00	.02	L070B	14.50	.07
L075N	CPL32	5.10	L075U	7.30	L075H	15.00	.03	L075B	23.20	.10
L090-095N	CPL32	6.60	L090-095U	10.50	L090-095H	20.00	.04	L090-095B	25.60	.17
L090-095N	CPL32	6.60	L090-095U	10.50	L090-095H	20.00	.04	L090-095B	25.60	.17
L099-100N	CPL32	13.90	L099-100U	27.60	L099-100H	47.60	.07	L099-100B	37.80	.33
L099-100N	CPL32	13.90	L099-100U	27.60	L099-100H	47.60	.07	L099-100B	37.80	.33
L110N	CPL32	16.00	L110U	52.40	L110H	57.60	.14	L110B	45.40	.63
L150N	CPL32	23.00	L150U	63.40	L150H	69.20	.21	L150B	146.00	1.01
L190N	CPL32	28.00	L190U	68.40	L190H	81.60	.27	L190B	222.00	1.35
L225N	CPL32	33.50	L225U	86.60	L225H	95.80	.41	L225B	284.00	2.05

*Important: NOT SOLD INDIVIDUALLY. These parts are packaged 4 to a box, order per multiple of 4.



TYPE 1



TYPE 2

For more details and additional products, see complete Baldor•Maska® Product Catalog or www.baldor.com

4-FLEX: Elastomeric Sleeve Type Couplings



Features: Maska 4-Flex part # are based on industry recognized nomenclature. 4-way flexing action. All types & sizes in cast iron. Precise concentric product to avoid run-out and unbalance. No lubrication; smooth, quiet power transmission. Fast & easy installation; no special tools or accessories required.

How to order FLANGE: Example (fixed bored): 9SX1-9/16; 9 = 4FLEX Flange size. S = 4FLEX Flange TYPE. X1-9/16 = Bore size (1 9/16") **Example (bush type): 8B-SH;** 8 = 4FLEX Flange size. B = 4FLEX Flange TYPE. SH = QD BUSHING SIZE.

ELEMENT MATERIAL Example: 9JES = 9 = 4FLEX element size. JES = Element material and construction (EPDM Split - "S" stands for Split)


TYPE "J" COUPLING FLANGE

Dimensions

Part Number	List Price	Mult. Sym.	Dimensions (inches)								**Bore (in)		*Approx. Wt. (lbs.)
			C	D	E	G	H	L	T	X	Min	Max	
3J	7.50	CPL31	51/64	2.062	13/32	3/8	1-1/2	1-31/32	25/64	5/8	3/8	7/8	0.3
4J	9.50	CPL31	55/64	2.460	27/64	5/8	1-5/8	2-11/32	7/16	5/8	1/2	1	0.4
5J	15.00	CPL31	1-3/64	3.250	29/64	3/4	1-7/8	2-27/32	19/32	59/64	1/2	1-1/8	0.9
6J	21.00	CPL31	1-5/16	4.000	9/16	7/8	2-1/2	3-1/2	3/4	1-3/32	5/8	1-3/8	1.2

* Approximate weight for each flange.

**See Baldor•Maska® Product Catalog for Stock bores.

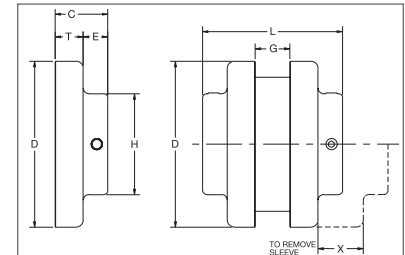

TYPE "S" COUPLING FLANGE

Dimensions


Part Number	List Price	Mult. Sym.	Type	Dimensions (inches)								**Bore (in)		*Approx. Wt. (lbs.)
				C	D	E	G	H	L	T	X	Min	Max	
5S	20.00	CPL31	-	1-11/32	3.250	29/64	23/32	1-7/8	2-13/16	19/32	31/32	1/2	1-1/4	1.1
	26.00	CPL31	1	1-5/8	4.000	17/32	7/8	2-1/2	3-1/2	25/32	1-3/32	5/8	1-1/2	1.9
6S	26.00	CPL31	2	1-5/16	4.000	17/32	7/8	2-1/2	3-1/2	25/32	1-3/32	1-5/8	1-3/4	1.8
	26.00	CPL31	3	1-9/16	4.000	25/32	7/8	2-13/16	4	25/32	1-3/32	1-7/8	1-7/8	1.8
7S	30.00	CPL31	-	1-27/32	4.625	11/16	1	2-13/16	3-15/16	25/32	1-5/16	5/8	1-7/8	2.6
	40.00	CPL31	1	2-3/32	5.450	3/4	1-1/8	3-1/4	4-7/16	29/32	1-1/2	3/4	2-1/8	4.4
8S	40.00	CPL31	2	1-15/16	5.450	1-1/32	1-1/8	3-1/4	5	29/32	1-1/2	2-3/8	2-3/8	3.7
	60.00	CPL31	1	2-13/32	6.350	25/32	1-7/16	3-7/8	5-1/16	1-1/32	1-3/4	7/8	2-1/2	6.8
9S	60.00	CPL31	2	2-9/32	6.350	1-1/4	1-7/16	4-1/8	6	1-1/32	1-3/4	2-7/8	2-7/8	6.2
	80.00	CPL31	1	2-23/32	7.500	13/16	1-5/8	4-3/8	5-11/16	1-7/32	2	1-1/8	2-7/8	10.5
10S	80.00	CPL31	2	2-11/16	7.500	1-15/32	1-5/8	4-3/4	7	1-7/32	2	3-3/8	3-3/8	9.8
	128.00	CPL31	1	3-7/16	8.625	1-1/8	1-7/8	5-1/4	7-1/8	1-1/2	2-3/8	1-1/4	3-7/8	16.6
12S	156.00	CPL31	-	4	10.000	1-9/32	2-5/16	5-3/4	8-1/4	1-11/16	2-11/16	1-1/2	3-7/8	26.6
13S	220.00	CPL31	-	4-3/8	11.750	1-5/16	2-11/16	6-3/4	9-1/4	1-31/32	3-1/16	2	3-15/16	45.2

* Approximate weight for each flange

** See Baldor•Maska® Product Catalog List Price for Stock bores

***Metric bores available see Baldor•Maska® Product Catalog

All finished bores come with 2 set screws.

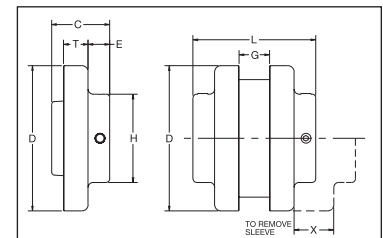


TYPE "B" COUPLING FLANGE

Dimensions

Part Number	List Price	Mult. Sym.	Bushing Size	Dimensions (inches)									~Max. Bore (inches)	*Wt. (lbs.)	
				C1	C2	D	E	F	G	L	T	X		Flange	Bush.
6B	38.00	CPL31	JA	1-17/64	1	4.000	33/64	2	7/8	3-13/32	3/4	1-3/32	1-1/4	1.4	0.4
7B	44.00	CPL31	JA	1-19/64	1	4.625	33/64	2	1	3-19/32	25/32	1-5/16	1-1/4	1.9	0.4
8B	50.00	CPL31	SH	1-31/32	1-1/4	5.450	5/8	2-11/16	1-1/8	4-3/16	29/32	1-1/2	1-5/8	2.9	0.9
9B	62.00	CPL31	SD	2-5/16	1-13/16	6.350	11/16	3-3/16	1-7/16	4-7/8	1-1/32	1-3/4	1-15/16	4.8	1.6
10B	84.00	CPL31	SK	2-1/32	1-7/8	7.500	13/16	3-7/8	1-5/8	5-11/16	1-7/32	2	2-1/2	7.8	2.7
11B	120.00	CPL31	SF	2-5/16	2	8.625	13/16	4-5/8	1-7/8	6-1/2	1-1/2	2-3/8	2-15/16	12.0	3.9
12B	146.00	CPL31	E	2-29/32	2-5/8	10.000	1-1/8	6	2-5/16	7-15/16	1-11/16	2-11/16	3-1/2	18.0	8.5
13B	208.00	CPL31	F	3-29/32	3-5/8	11.750	1-7/32	6-5/8	2-11/16	9-1/16	1-31/32	3	3-15/16	31.2	13.3

~ Maximum bore with keyseat.


* Approximate weight for each flange.

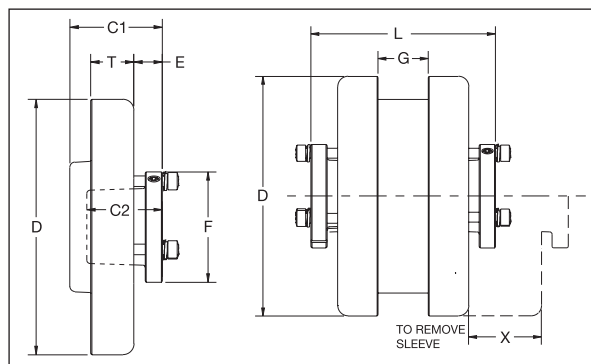

4-FLEX: Type "SC" SPACER Couplings



Features: Satisfies standard spacing requirements for pump applications. Accommodates wide range of shaft spacing. Features AGMA 9 balanced flanges & drop-out center for easy equipment maintenance. Available with EPDM or Hytrel sleeves. Uses H & HS shaft hubs that are bored to size for slip fit or offered with plain bore for reboring. Shaft attachment with two setscrews; one over the keyway and one at 65° for better shaft grip. Shaft hub flats are used for holding both shafts stationary while loosening or tightening grade 8 bolts.



How to order FLANGE: Example: 9SC50; 9 = 4FLEX Flange size. SC = 4FLEX Flange TYPE. 50 = FLANGE # (Determined by the required distance between shafts)

HUB Example: 9SC-HX1-1/8 9: 4FLEX Flange size. SC: 4FLEX Flange TYPE. -HX1-1/8: BORE SIZE (1 1/8")

ELEMENT MATERIAL Example: 9JES = 9 = 4FLEX element size. JES = Element material and construction (EPDM Split - "S" stands for Split)

Part Number	Required Distance Between Shafts*	Use Flange Size	Use Hub No.	Max. Bore Std. Ks	Dimensions				Approx. Wt. (lbs.)
					A	B(1)	E	K	
5SC	3-1/2	5SC35	5SC-H	1-1/8	3.250	5-5/8	3/4	9/16	4.5
6SC	3-1/2	6SC35	6SC-H	1-3/8	4.000	5-7/8	7/8	3/4	7.3
	4-3/8	6SC44	6SC-H	1-3/8	4.000	6-3/4	7/8	3/4	8.1
	5	6SC50	6SC-H	1-3/8	4.000	7-3/8	7/8	3/4	8.7
7SC	3-1/2	7SC35	7SC-H	1-5/8	4.625	6-3/8	1	5/8	9.9
	4-3/8	7SC44	7SC-H	1-5/8	4.625	7-1/4	1	5/8	10.8
	5	7SC50	7SC-H	1-5/8	4.625	7-7/8	1	5/8	11.4
8SC	3-1/2	8SC35	8SC-H	1-7/8	5.450	6-7/8	1-1/8	13/16	15.2
	3-1/2	8SC35-10	10SC-H, 10SC-HS	2-3/8	5.450	8-1/8	1-1/8	13/16	23.2
	4-3/8	8SC44	8SC-H	1-7/8	5.450	7-3/4	1-1/8	13/16	16.4
	5	8SC50	8SC-H	1-7/8	5.450	8-3/8	1-1/8	1-3/16	17.4
	5	8SC50-10	10SC-H, 10SC-HS	2-3/8	5.450	9-5/8	1-1/8	1-3/16	27.2
9SC	3-1/2	9SC35	9SC-H, 9SC-HS	2-1/8	6.350	7-1/2	1-7/16	1-1/16	18.6
	4-3/8	9SC44	9SC-H, 9SC-HS	2-1/8	6.350	8-1/4	1-7/16	1-1/16	22.2
	5	9SC50	9SC-H, 9SC-HS	2-1/8	6.350	8-7/8	1-7/16	1-1/16	23.2
	5	9SC50-11	11SC-H, 11SC-HS	2-7/8	6.350	10-3/8	1-7/16	1-3/16	40.4
	7	9SC70-11	11SC-H, 11SC-HS	2-7/8	6.350	12-3/8	1-7/16	1-3/16	48.2
	7-3/4	9SC78-11	11SC-H, 11SC-HS	2-7/8	6.350	13-1/8	1-7/16	1-3/16	51.0
10SC	4-3/4	10SC48	10SC-H, 10SC-HS	2-3/8	7.500	9-3/8	1-5/8	1-3/16	37.6
	5	10SC50	10SC-H, 10SC-HS	2-3/8	7.500	9-5/8	1-5/8	1-3/16	38.4
	7	10SC70-13	13SC-H, 13SC-HS	3-3/8	7.500	13-5/8	1-5/8	1-7/8	72.0
	7-3/4	10SC78-13	13SC-H, 13SC-HS	3-3/8	7.500	14-3/8	1-5/8	1-7/8	76.0
	10	10SC100-13	13SC-H, 13SC-HS	3-3/8	7.500	16-5/8	1-5/8	1-7/8	88.0
11SC	4-3/4	11SC48	11SC-H, 11SC-HS	2-7/8	8.625	10-5/16	1-7/8	1-3/16	54.5
	5	11SC50	11SC-H, 11SC-HS	2-7/8	8.625	10-3/8	1-7/8	1-3/16	54.7
	7	11SC70-14	14SC-H	3-7/8	8.625	14-5/8	1-7/8	2	86.1
	7-3/4	11SC78-14	14SC-H	3-7/8	8.625	15-3/8	1-7/8	2	90.3
	10	11SC100-14	14SC-H	3-7/8	8.625	17-5/8	1-7/8	2	102.7
12SC	7	12SC70	12SC-H, 12SC-HS	2-7/8	10.000	12-7/8	2-5/16	1-1/2	88.1
	7	12SC70-14	14SC-H	3-7/8	10.000	14-5/8	2-5/16	2	99.1
	7-3/4	12SC78	12SC-H, 12SC-HS	2-7/8	10.000	13-5/8	2-5/16	1-1/2	91.9
	7-3/4	12SC78-14	14SC-H	3-7/8	10.000	15-3/8	2-5/16	2	103.3
	10	12SC100-14	14SC-H	3-7/8	10.000	17-5/8	2-5/16	2	115.7
13SC	7-3/4	13SC78	13SC-H, 13SC-HS	3-3/8	11.750	14-3/8	2-11/16	1-7/8	129.6
14SC	7-3/4	14SC78	14SC-H	3-7/8	13.875	15-3/8	3-1/4	2	179.9


(1) "B" dimension and weight will change if one or two short (HS) hubs are used.

Note: Refer to following pages to order - specify components separately.

For more details and additional products, see complete Baldor•Maska® Product Catalog or www.baldor.com


TYPE "SC" COUPLING FLANGE

Part Number	List Price	Mult. Sym.	DIMENSIONS					Approx. Wt. (lbs.)
			A	C	G	L	T	
5SC35	26.00	CPL31	3.250	2	51/64	1-11/16	19/32	1.20
6SC35	32.00	CPL31	4.000	2-1/2	19/32	1-5/8	23/32	2.09
6SC44	40.00	CPL31	4.000	2-1/2	1-1/32	2-1/16	23/32	2.48
6SC50	48.00	CPL31	4.000	2-1/2	1-11/32	2-3/8	23/32	2.76
7SC35	40.00	CPL31	4.625	2-13/16	15/32	1-5/8	25/32	2.52
7SC44	48.00	CPL31	4.625	2-13/16	29/32	2-1/16	25/32	2.99
7SC50	56.00	CPL31	4.625	2-13/16	1-7/32	2-3/8	25/32	3.33
8SC35	52.00	CPL31	5.450	3-1/4	9/32	1-5/8	29/32	3.67
8SC35-10	64.00	CPL31	5.450	4-3/8	9/32	1-5/8	29/32	3.46
8SC44	64.00	CPL31	5.450	3-1/4	23/32	2-1/16	29/32	4.30
8SC50	76.00	CPL31	5.450	3-1/4	1-1/32	2-3/8	29/32	4.75
8SC50-10	96.00	CPL31	5.450	4-3/8	1-1/32	2-3/8	29/32	5.52
9SC35	64.00	CPL31	6.350	3-5/8	1/16	1-11/16	1-1/32	4.14
9SC44	84.00	CPL31	6.350	3-5/8	7/16	2-1/16	1-1/32	5.89
9SC50	108.00	CPL31	6.350	3-5/8	3/4	2-3/8	1-1/32	6.43
9SC50-11	116.00	CPL31	6.350	5-1/4	3/4	2-3/8	1-1/32	6.95
9SC70-11	120.00	CPL31	6.350	5-1/4	1-3/4	2-3/8	1-1/32	10.80
9SC78-11	124.00	CPL31	6.350	5-1/4	2-1/8	3-3/4	1-1/32	12.37
10SC48	104.00	CPL31	7.500	4-3/8	11/32	2-1/4	1-7/32	9.81
10SC50	112.00	CPL31	7.500	4-3/8	15/32	2-3/8	1-7/32	10.15
10SC70-13	156.00	CPL31	7.500	6-1/8	1-15/32	3-3/8	1-7/32	14.50
10SC78-13	164.00	CPL31	7.500	6-1/8	1-27/32	3-3/4	1-7/32	16.45
10SC100-13	192.00	CPL31	7.500	6-1/8	2-31/32	4-7/8	1-7/32	22.50
11SC48	172.00	CPL31	8.625	5-1/4	1/32	1-1/2	1-1/2	12.53
11SC50	180.00	CPL31	8.625	5-1/4	1/16	1-9/16	1-1/2	12.63
11SC70-14	200.00	CPL31	8.625	6-1/2	1-1/16	2-9/16	1-1/2	16.30
11SC78-14	204.00	CPL31	8.625	6-1/2	1-7/16	2-15/16	1-1/2	18.36
11SC100-14	260.00	CPL31	8.625	6-1/2	2-9/16	4-1/16	1-1/2	24.70
12SC70	192.00	CPL31	10.000	5-3/4	21/32	2-15/32	1-11/16	23.40
12SC70-14	252.00	CPL31	10.000	6-1/2	21/32	2-15/32	1-11/16	21.30
12SC78	196.00	CPL31	10.000	5-3/4	1-1/32	2-27/32	1-11/16	25.39
12SC78-14	264.00	CPL31	10.000	6-1/2	1-1/32	2-27/32	1-11/16	23.40
12SC100-14	288.00	CPL31	10.000	6-1/2	2-5/32	3-31/32	1-11/16	29.70
13SC78	264.00	CPL31	11.750	6-1/8	9/16	3-1/4	1-31/32	38.37
14SC78	396.00	CPL31	13.875	6-1/2	1/32	2-23/32	2-1/4	55.24

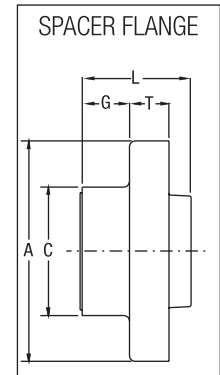

TYPE "SC" COUPLING SPACER SHAFT HUB

Part Number	STOCK BORES		List Price	Mult. Sym.	F	C	Cap Screws Furnished	Approx. Wt. (lbs.)
	Plain Bore	Bore with Standard keyway & Set Screw						
5SC-H	1/2-PB	1/2 · 5/8 · 3/4 · 7/8 · 1 · 1-1/8	32.00	CPL31	1-3/32	2	4 X 10X1-1/2	0.80
6SC-H	5/8-PB	5/8 · 3/4 · 7/8 · 1 · 1-1/8 · 1-1/4 · 1-3/8	36.00	CPL31	1-7/32	2-1/2	4 X 1/4X1-3/4	1.40
7SC-H	5/8-PB	5/8 · 7/8 · 1 · 1-1/8 · 1-1/4 · 1-3/8 · 1-1/2 · 1-5/8	40.00	CPL31	1-15/32	2-13/16	4 X 1/4X1-7/8	2.00
8SC-H	3/4-PB	3/4 · 7/8 · 1 · 1-1/8 · 1-1/4 · 1-3/8 · 1-1/2 · 1-5/8 · 1-3/4 · 1-7/8	50.00	CPL31	1-23/32	3-1/4	4 X 5/16X2-1/4	3.20
9SC-H	7/8-PB	7/8 · 1 · 1-1/8 · 1-1/4 · 1-3/8 · 1-1/2 · 1-5/8 · 1-3/4 · 1-7/8 · 2-1/8	64.00	CPL31	1-31/32	3-5/8	4 X 3/8X2-3/4	4.20
9SC-HS		1-1/8	60.00	CPL31	1-17/32	3-5/8	4 X 3/8X2-1/4	3.70
10SC-H	1 1/8PB	1-1/8 · 1-5/8 · 1-7/8 · 2-1/8 · 2-3/8	116.00	CPL31	2-11/32	4-3/8	4 X 7/16X3-1/4	7.40
10SC-HS		1-1/8	108.00	CPL31	1-21/32	4-3/8	4 X 7/16X2-1/2	5.50
11SC-H	1 1/8PB	1-1/8 · 1-7/8 · 2-1/8 · 2-3/8 · 2-7/8	160.00	CPL31	2-23/32	5-1/4	4 X 1/2X3-1/2	12.20
11SC-HS		1-1/8 · 1-5/8	152.00	CPL31	1-29/32	5-1/4	4 X 1/2X2-3/4	9.30
12SC-H	1 3/8PB	2 · 2-1/8 · 2-3/8 · 2-7/8	208.00	CPL31	2-21/32	5-3/4	4 X 5/8X4	16.60
12SC-HS		2-3/8	196.00	CPL31	2-17/32	5-3/4	4 X 5/8X3-1/2	14.10
13SC-H		2-3/8 · 2-7/8 · 3-3/8	232.00	CPL31	3-11/32	6-1/8	4 X 5/8X4-1/2	19.90
13SC-HS		2-1/8 · 2-3/8	220.00	CPL31	2-15/32	6-1/8	4 X 5/8X3-1/2	16.00
14SC-H		2-3/8 · 2-7/8 · 3-3/8 · 3-7/8	280.00	CPL31	3-27/32	6-1/2	4 X 5/8X5	24.20



ELEMENT CHARACTERISTICS

Sleeve Types


SHAPES AVAILABLE	EPDM	HYTREL
1 pc, unsplit	JE	H
1 pc, split	JES	-
2 pieces	E	HS
TYPICAL USE	General Purpose	General Purpose
REL. RATING	1X	4X
WIND-UP ANGULAR	15°	7°
MISALIGNMENT	1°	1/4°
TEMPERATURE		
maximum	+275° F.	+250° F.
minimum	—30° F.	—65° F.




JE



JES



H



HS



E




E

(exploded view)


EPDM ELEMENT - TYPES "JE", "JES", "E"

Dimensions


Part Number	List Price	Part No.	List Price	Part No.	List Price	Mult. Sym.	Coupling Size	D (inches)	W (inches)	Approx. Wt. (lbs)
3JE	4.20	3JES	5.60			CPL31	3	1-7/8	1	0.06
4JE	6.00	4JES	8.00			CPL31	4	2-5/16	1-1/4	0.10
5JE	12.00	5JES	14.00	5E	25.00	CPL31	5	2-15/16	1-9/16	0.20
6JE	20.00	6JES	22.00	6E	30.00	CPL31	6	3-3/4	1-7/8	0.40
7JE	26.00	7JES	28.00	7E	38.00	CPL31	7	4-11/32	2-3/16	0.62
8JE	34.00	8JES	38.00	8E	66.00	CPL31	8	5-1/16	2-1/2	1.13
9JE	40.00	9JES	44.00	9E	74.00	CPL31	9	6	3	1.46
10JE	56.00	10JES	60.00	10E	90.00	CPL31	10	7-1/16	3-7/16	2.32
		---		11E	164.00	CPL31	11	8-3/16	4	5.10
		---		12E	240.00	CPL31	12	9-9/16	4-11/16	8.10
		---		13E	420.00	CPL31	13	11-3/16	5-1/2	13.00



JE & JES



E



H & HS

HYTREL ELEMENT - TYPES "H", "HS"

Dimensions

Part Number	List Price	Mult. Sym.	Part No.	List Price	Mult. Sym.	Coupling Size	D (inches)	W (inches)	Approx. Wt. (lbs)
6H	80.00	CPL31	6HS	84.00	CPL31	6	3-3/4	1-7/8	0.44
7H	116.00	CPL31	7HS	120.00	CPL31	7	4-11/32	2-3/16	0.69
8H	126.00	CPL31	8HS	130.00	CPL31	8	5-1/16	2-1/2	1.40
9H	166.00	CPL31	9HS	172.00	CPL31	9	6	3	1.80
10H	224.00	CPL31	10HS	230.00	CPL31	10	7-1/16	3-7/16	2.90
11H	346.00	CPL31	11HS	354.00	CPL31	11	8-3/16	4	4.50
12H	496.00	CPL31	12HS	506.00	CPL31	12	9-9/16	4-11/16	7.30
-	-	CPL31	13HS	840.00	CPL31	13	11-3/16	5-1/2	11.80

MASKAFLEX : ELASTOMERIC TIRE TYPE



Features: Superior designed and manufactured "X-Tork" tire. Bonded and thermally stabilized rubber with double-woven textile cords & multiple cables in toe that allow the element to seat perfectly and contribute to element stability & flange grip. Ridged extremity & inner sidewalls designed for enhanced grip of the flanges.

How to order COMPLETE COUPLING: To order the complete coupling you need to order 2 flanges and the element separately.

FLANGE Example: MXF 120 = MASKAFLEX flange part number.

Element Material Example: P120 = MASKAFLEX element part number (tire)

A complete Maskaflex coupling corresponds to (2) flanges and (1) element. Specify the bore size required to order the appropriate QD bushing with it.

Dimensions

Complete Coupling Part Number	List price w/o Bushing Complete Coupling	Mult. Sym.	Bush. Size	Max. Bore	Type	Dimensions (inches)							Weight (lbs)		
						A	B	C	D	E	F	G	Complete	Flange	Tire
MX 50**	114.00	CPL14	JA	1-1/4	1	5-1/4	3-7/8	3-23/32	3-17/32	7/8	*	1-17/32	4.7	2.1	.5
MX 60	151.00	CPL14	SH	1-5/8	1	6-1/2	4-23/32	4-1/2	4-9/32	1-9/32	*	1-25/32	8.0	3.5	1.0
MX 70	201.00	CPL14	SDS	1-15/16	1	7-3/8	4-17/32	4-5/16	4-1/8	1-1/2	*	1-1/2	10.7	4.7	1.3
MX 80	265.00	CPL14	SK	2-1/2	1	8-3/8	5-13/16	5-17/32	5-1/4	1-1/2	*	1-1/2	15.5	6.9	1.7
MX 90	335.00	CPL14	SK	2-1/2	1	9-1/4	5-7/8	5-9/16	5-5/16	1-17/32	*	1-9/16	22.0	10.0	2.0
MX 100	411.00	CPL14	SF	2-3/4	1	10	6-1/8	5-25/32	5-15/32	1-23/32	*	1-15/32	32.0	15.0	2.0
MX 110	457.00	CPL14	SF	2-3/4	1	11	5-7/8	5-1/2	5-3/16	1-9/16	*	1-3/16	46.0	21.5	3.0
MX 120	529.00	CPL14	E	3-7/16	1	12-3/8	7-1/4	6-7/8	6-1/2	1-3/4	*	1-1/4	59.8	28.0	3.8
MX 140	918.00	CPL14	F	3-15/16	2	14-1/8	9-1/2	9-1/16	8-5/8	2-1/16	*	1-3/8	132.5	64.0	4.5
MX 160	1352.00	CPL14	J	4	2	16-5/8	11-1/2	10-7/8	10-3/8	2-11/16	*	1-3/8	208.7	100.0	8.7
MX 200	2043.00	CPL14	J	4	2	20	11-3/4	11-5/16	10-13/16	3-5/16	*	1-13/16	366.0	174.0	18.0


→ Maximum bore with keyseat

* Shaft ends although normally "G" distance apart can project beyond the bushings and be closer together. If this occurs, allow space between shaft ends for endfloat and misalignment.

** The MX50 coupling can only be outside-outside mount.

Parts


Flange			Tire		
Flange Part Number	List Price	Mult. Sym.	Tire Part No.	List Price	Mult. Sym.
MXF 50	37.00	CPL14	P50	40.00	CPL15
MXF 60	52.00	CPL14	P60	47.00	CPL15
MXF 70	68.00	CPL14	P70	65.00	CPL15
MXF 80	89.00	CPL14	P80	87.00	CPL15
MXF 90	121.00	CPL14	P90	93.00	CPL15
MXF 100	155.00	CPL14	P100	101.00	CPL15
MXF 110	171.00	CPL14	P110	115.00	CPL15
MXF 120	200.00	CPL14	P120	129.00	CPL15
MXF 140	354.00	CPL14	P140	210.00	CPL15
MXF 160	550.00	CPL14	P160	252.00	CPL15
MXF 200	790.00	CPL14	P200	463.00	CPL15

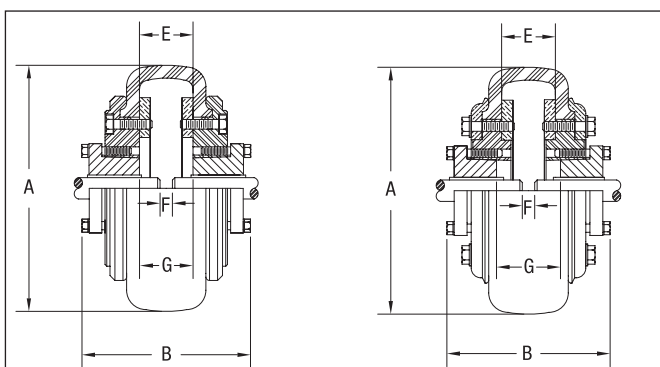

MX 50 TO MX 120

MX 140 TO MX 200

TYPE 1

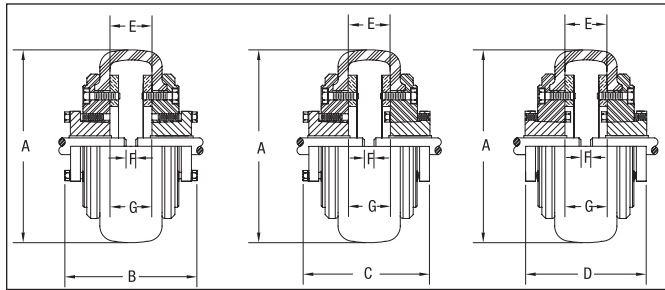


OUTSIDE-
OUTSIDE
MOUNT

OUTSIDE-
INSIDE
MOUNT

INSIDE-
INSIDE
MOUNT

TYPE 2

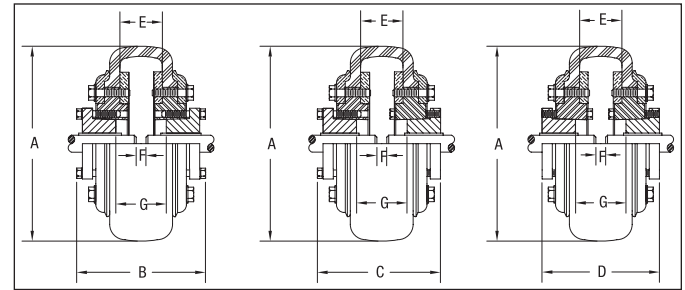

OUTSIDE-
OUTSIDE
MOUNT

OUTSIDE-
INSIDE
MOUNT

INSIDE-
INSIDE
MOUNT

COUPLING RATINGS & MISALIGNMENT

Coupling Part Number	Bush. Size	Max. Bore	Max RPM	HP per 100 RPM Service factors					Torque* @ 1.0 S.F. (LB in)	Average static torsional stiffness coefficient (H)		Approx. Wt ² (LB-FT ²)	Max. parallel misalignment	Max. axial misalignment
				1.0	1.5	2.0	2.5	3.0		LB-IN/ DEG.	LB-IN/RAD.			
MX 50	JA	1-1/4	4500	1.43	.95	.72	.57	.48	900	224	12,850	.08	3/64	1/16
MX 60	SH	1-5/8	4000	2.86	1.91	1.43	1.14	.95	1,800	414	23,700	.24	1/16	5/64
MX 70	SDS	1-15/16	3600	3.49	2.33	1.75	1.40	1.16	2,200	544	31,200	.45	5/64	3/32
MX 80	SK	2-1/2	3100	5.71	3.81	2.86	2.28	1.90	3,600	876	50,200	.88	5/64	7/64
MX 90	SK	2-1/2	2800	6.90	4.60	3.45	2.76	2.30	4,350	1,088	62,400	1.60	3/32	1/8
MX 100	SF	2-3/4	2600	8.33	5.55	4.17	3.33	2.78	5,250	1,530	87,700	2.90	7/64	1/8
MX 110	SF	2-3/4	2300	12.30	8.20	6.15	4.92	4.10	7,750	2,420	138,700	4.30	7/64	9/64
MX 120	E	3-7/16	2100	19.90	13.27	9.95	7.96	6.63	12,540	4,014	217,000	6.70	1/8	5/32
MX 140	F	3-15/16	1840	43.78	29.19	21.89	17.51	14.59	27,590	8,296	476,000	19.50	9/64	3/16
MX 160	J	4	1560	59.98	39.99	29.99	23.99	19.99	37,800	12,000	688,000	34.60	11/64	13/64
MX 200	J	4	1300	130.90	87.27	65.45	52.36	43.63	82,500	29,000	1,662,000	103.00	13/64	17/64

* To obtain the maximal torque, multiply by 2.5 the nominal torque. (X-Tork tire)
For more details see Baldor•Maska® Product Catalog

CROSS REFERENCES

MASKA-FLEX Maska	HI-FLEX Maurey	MARTIN-FLEX Martin
MX 50	50JA	F5 JA
MX 60	60SH	F6 JA
MX 70	70SH	F7 SH
MX 80	80SDS	F8 SDS
MX 90	90SK	F9 SK
MX 100	100SF	F10 SF
MX 110	110SF	F11 SF
MX 120	120E	F12 E
MX 140	140E	N/A
MX 160	N/A	N/A
MX 200	N/A	N/A

